

# Gas Springs & Standard Mounts

Edition 4.2024  
© KALLER

**Would you like to order one of these product?**  
All available information is at [www.kaller.com](http://www.kaller.com)



## CONTENT

---

<b>Chapter 1 - About gas springs</b>	<b>Page</b>
“The Safer Choice”	4
“General information”	5
“User Information”	6
“Gas springs selection guide”	10

---

<b>Chapter 2 - Gas springs</b>	<b>Page</b>
“Gas Spring - contents”	12
“KALLER Limited Warranty”	13
“Overview - F-Initial $\leq$ 2500”	14
“Overview - 2500 $\leq$ F-Initial < 5000”	42
“Overview - 5000 $\leq$ F-Initial < 7500”	60
“Overview - 7500 $\leq$ F-Initial < 10000”	76
“Overview - 10000 $\leq$ F-Initial < 25000”	100
“Overview - 25000 $\leq$ F-Initial < 50000”	148
“Overview - 50000 $\leq$ F-Initial < 75000”	170

---

<b>Chapter 3 - Mounts</b>	<b>Page</b>
“Mounting Guidelines”	220
“Mounts”	228

## THE SAFER CHOICE

Introduced in 1983, the KALLER® gas spring technology quickly led to worldwide demand. The Safer Choice – Training, Safety and Reliability – has always been a KALLER® top priority for providing innovative solutions for the safer working environment. We recommend looking through all available KALLER® features when selecting gas springs and gas or hose linked systems.



### KALLER Safety App

SAFETY. Fake or KALLER® original? With the KALLER Safety App you can identify and verify your specific KALLER® gas springs.



### Overstroke Protection System

SAFETY. When a gas spring is overstroked, this helps reduce the risk of tool damage or injury.



### PED approved for a minimum of 2 million strokes

RELIABILITY. Our 2 million stroke PED approval ensures safer component cycle life.



### Overload Protection System

SAFETY. Jammed cam or tool part being forced by gas springs? This will help reducing such risks.



### Overpressure Protection System

SAFETY. Vents the spring if the internal gas pressure exceeds the maximum allowable limit to prevent accidents.



### Flex Guide™ System

RELIABILITY. Prolongs service life, allows more strokes per minute, and offers greater tolerance to lateral tool movements.



### Dual Seal™ Link Systems

RELIABILITY. Fewer production interruptions due to leakage caused by vibration. Simplified installation thanks to the non-rotation feature.



### KALLER Training Program

TRAINING. Without doubt the KALLER Training Program is the best and most creative way to fully understand and appreciate the importance of the safety and reliability features.

## GENERAL INFORMATION

**KALLER® gas springs are designed to meet customer expectations for reliability, safety and service lifetime. The design, manufacture and testing of KALLER® gas springs has been approved according to the European Pressure Equipment Directive (2014/68/EU).**



The Pressure Equipment Directive (PED) replaces all previous European legislation governing the design, manufacture and testing of pressure vessels. Manufacturing relies on the very latest production methods and equipment at our modern facilities in Tranås, Sweden. Strömsholmen AB, the designers and manufacturers of KALLER® gas springs, has been ISO 9001 approved since 1994 and ISO 9000:2000 and PED (97/23/EC) approved since 2002. The company is the world's premiere and leading manufacturer of nitrogen gas springs for the metal stamping industry.


### KALLER® Worldwide Guarantee

Strömsholmen AB, which develops, manufactures and markets KALLER® gas springs, guarantees that each gas spring manufactured by Strömsholmen AB is free of defects in materials and workmanship. The KALLER® Worldwide Guarantee applies to gas springs used up to 2,000,000 strokes from 0 mm to 80 mm per stroke or 1,000,000 strokes above 80 mm per stroke\* or two years from the date of purchase, whichever occurs first. The KALLER® Worldwide Guarantee only applies to gas springs used in accordance with the KALLER® gas springs installation and User Guides ([www.kaller.com/en-us/support/documents](http://www.kaller.com/en-us/support/documents)). Strömsholmen AB's liability is limited solely to the authorized repair or replacement of any gas spring that is returned to Strömsholmen AB and is reasonably determined by Strömsholmen AB to be found defective. KALLER® Limited Warranty details are available upon request.


\*Exceptions include gas springs with initial force less than 5 kN, MT and Controllable gas springs which are guaranteed for a maximum of 500,000 strokes or 50,000 stroke meters, whichever occurs first.

### Main groups of gas springs

KALLER® gas springs can be divided into two main groups, namely Piston Rod Sealed and Bore Sealed. The two basic designs are depicted below:

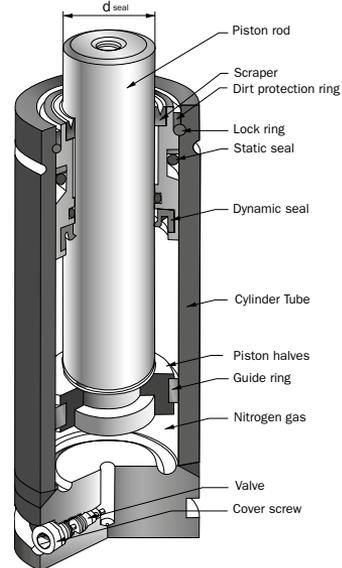

Piston Rod Sealed gas spring

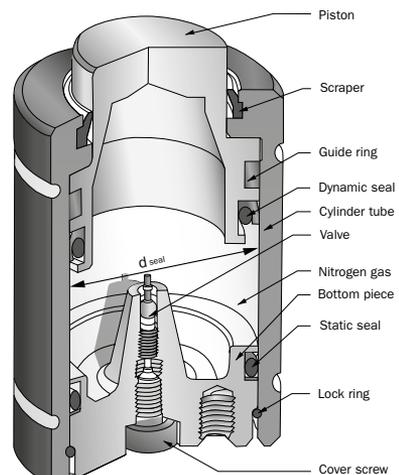


Bore Sealed gas spring

## USER INFORMATION

### Mounting instructions

To achieve the best possible service life and safety from the gas spring, the following instructions must be followed. The gas spring is intended for use in tool and machine applications.

- Always secure the gas spring to the tool/machine, using the threaded hole(s) in the base of the gas spring or a suitable flange.
- Do not use the threaded hole in the piston rod top for mounting purposes. It is only to be used when servicing the gas spring.
- Do not use the gas spring in such a way that the piston rod is released freely from its compressed position, as this could cause internal damage to the gas spring.
- Depending on the model, the maximum allowed stroke speed is from 0.5 to 2.0 m/s (see catalogue).
- Make sure the gas spring is mounted parallel to the direction of the stroke.
- Ensure the contact surface hitting the piston rod top is perpendicular to the direction of the compression stroke and is sufficiently hardened.
- Do not subject the gas spring to side loads.
- Protect the piston rod against mechanical damage and contact with fluids.
- Ensure the entire contact surface of the piston rod top/piston is used.

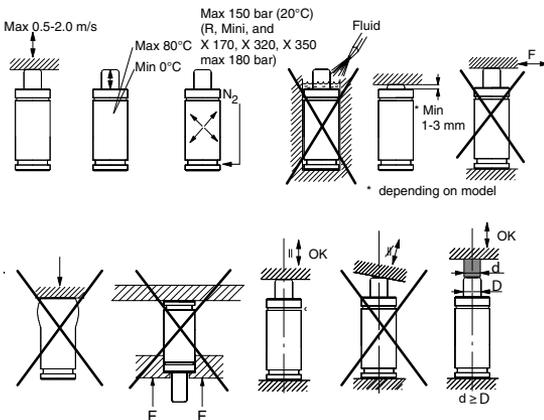


### CAUTION!

**Do not modify the product in any way. For more information, please contact Strömsholmen ([www.kaller.com](http://www.kaller.com)) or your local KALLER® distributor.**

### Mounting of gas springs

When mounting the gas spring in the tool/machine, certain specifications must be adhered to in order to assure that the mount/flange does not come loose:


- Screws must have a free length (clamping length) of 2 to 4 × the thread diameter and a thread depth of at least 1.5 × the thread diameter in steel and 2 × the thread diameter in cast iron.
- If the free length cannot be achieved in any other way, the screw holes must be countersunk.
- Always use a torque wrench to tighten to the correct torque.
- Only use mounts manufactured or approved by KALLER®.

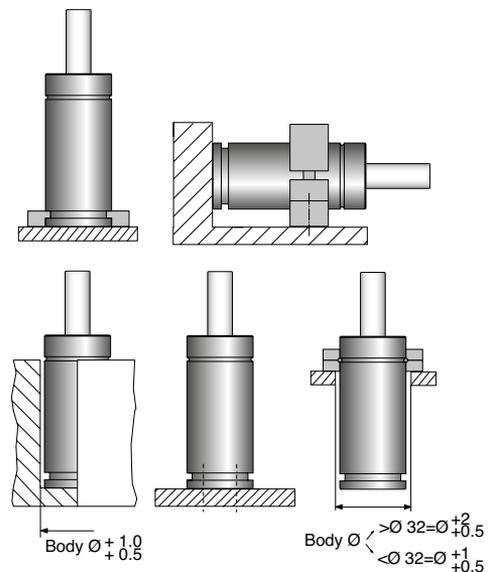

## Stroke length

The nominal stroke (defined as S in the catalog tables) may be utilized fully in all KALLER® gas springs. However, in \* normal operations the recommendation is not to use the full nominal stroke length. This is to prevent the spring from being “over-stroked” as a result of changes to the tool or mishaps in the tool.

An external stop for the tool is recommended. We do not recommend utilizing the last 5 mm or 10 % of the nominal stroke length.

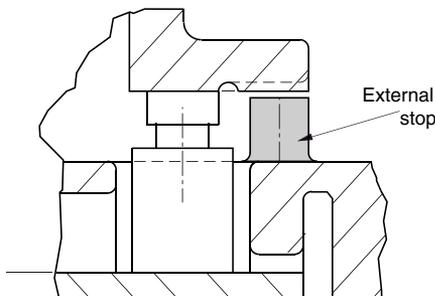

## Maximum charging pressure

The maximum charging pressure (at 20°C) stated for the different gas springs must not be exceeded as it may affect the safety of the product.

## Operating temperature

Exceeding the gas spring’s recommended max. operating temperature (measured on the cylinder surface) will shorten the service life of the gas spring.

## Recommended maximum strokes/minute

The values given for each gas spring in the catalog apply for “normal” press tool applications. The lower limits given apply to the longer stroke lengths, while the higher values apply to short stroke springs. These values are based on a fully utilized stroke. If only a portion of the stroke is used, the number of strokes per minute can be increased (provided that the maximum operating temperature is not exceeded).

For further information, please contact your local distributor.

## Maximum piston rod velocity

The maximum piston rod velocity must not be exceeded because it may infringe on safety and can affect gas spring performance.

## Service interval

If correctly installed and used, the following minimum service interval of the KALLER® gas springs, except model MT, is recommended.

**Stroke lengths up to and including 50 mm:**  
after 1 million strokes.

**Stroke lengths above 50 mm:**  
after 100,000 stroke meters.

The number of stroke meters is calculated as:  
Used stroke (in meters) × 2 × number of strokes.

## Service information

All KALLER® gas springs can be serviced except the following models: EP3 16, EP2 24, EPS2 24, R12, R15, R19, CU4 420, X 170, X 320, X 2400-16 and MT 16, MT 24 Series. Repair Kits and Tool Kits are available. Service instructions are included in the Repair Kits.

**Caution! Only specially trained personnel with thorough knowledge about the products should perform maintenance. Mistakes made during assembly and charging may infringe on safety and/or have a detrimental effect on the service life of the product.**


Instructional service videos are also available at [www.kaller.com](http://www.kaller.com).

## Force calculations

All end forces, stated in the catalog are the isothermal end forces.


Generally isothermal calculation is sufficient for choosing gas springs, but during operation, true end forces may vary depending on operating conditions.

For more detailed information, please consult our *KALLER Basic Gas spring Theory* brochure or utilize our *Force and Temperature Calculator* on [kaller.com/en-us/support/user-tools/](http://kaller.com/en-us/support/user-tools/).

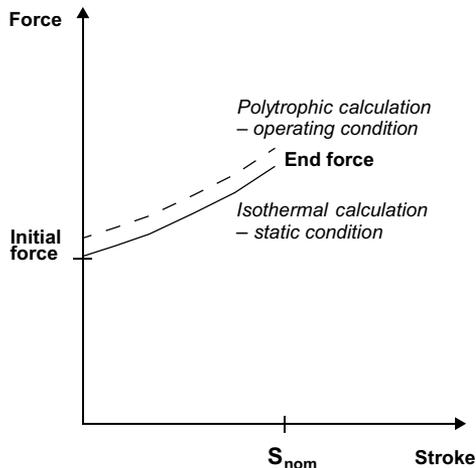

## Isothermal force as a function of stroke

When calculating the force at any position of the stroke the following equation can be used:

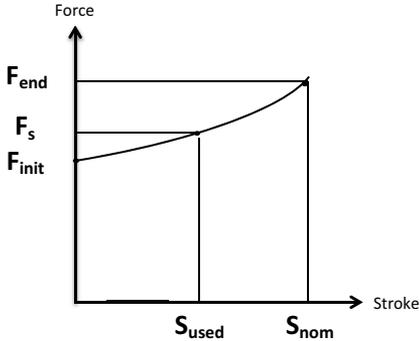

$$F_s = F_{init} \cdot \left[ \frac{S_{nom}}{S_{nom} - S_{used}} \cdot \left[ 1 - \frac{F_{init}}{F_{end}} \right] \right]$$

$F_{init}$  = Initial force  
 $F_{end}$  = End force at nom.stroke  
 $S_{nom}$  = Nom. stroke length (mm)  
 $S_{used}$  = Used stroke length (mm)

### Example:

What is the spring force of a TU 1500-100 when compressing the spring 80 mm at a charging pressure of 150 bar?

The table for the TU 1500 (see page 138) will give the following values:

$F_{init}$  = 15,000 N  
 $S_{nom}$  = 100 mm  
 $F_{init}$  = 15,000 N  
 $F_{end}$  = 23,000 N

$$F_s = 15,000 \cdot \left[ \frac{100}{100 - 80} \cdot \left[ 1 - \frac{15,000}{23,000} \right] \right]$$

$$F_s (80 \text{ mm}) = 20,800 \text{ N}$$

If the temperature of the gas spring is kept constant, (isothermal process), the spring will give a force of 20,800 N when compressed 80 mm.

## Polytropic force as a function of stroke

For most applications the temperature inside the gas spring will not stay constant during the stroke. Therefore the real force is different from application to application depending on:

Stroke length and used stroke, gas volume, press velocity and strokes per minute (SPM), operating temperature and environment, internal frictions etc.



# GAS SPRINGS SELECTION GUIDE

Series	Description	Gas spring model	Available stroke lengths (mm)	Initial force at max. pressure		Total length (mm)	Cylinder diameter (mm)
				(N)	(lbf)		
<b>EP3 16</b> <b>EPS3 16</b> <b>EP2 24</b> <b>EPS2 24</b>	Color coded gas Ejector-Pins, interchangeable with mechanical spring plungers.	EP3 16	10 - 125	420	95	45 + (2 x Stroke)	M16x1.5/M16x2
		EPS3 16	10 - 125	420	95	45 + (2 x Stroke)	M16x1.5
		EP2 24	10 - 125	1,700	382	45 + (2 x Stroke)	M24x1.5
		EPS2 24	10 - 125	1,700	382	45 + (2 x Stroke)	M24x1.5
<b>R12</b> <b>R15</b> <b>R19</b>	Rod sealed and color coded gas springs – compact and fully adjustable.	R12	7 - 125	500	112	56 - 295	Ø 12
		R15	7 - 125	700	160	56 - 295	Ø 15
		R19	7 - 125	900	202	56 - 295	Ø 19
<b>M2</b> <b>MM2</b> <b>MC3</b> <b>MC3-SP</b>	Repairable, color coded and fully adjustable gas springs available with or without threaded cylinders.	M2	10 - 125	2,000	450	62 - 295	Ø 25
		MM2	10 - 125	2,000	450	42 + (2 x Stroke)	M28x1.5
		MC3	10 - 125	2,000	450	50 + (2 x Stroke)	Ø 32
		MC3-SP	10 - 125	2,000	450	50 + (2 x Stroke)	Ø 32
<b>CU4</b>	Super compact gas springs providing extreme initial forces with minimal cylinder diameters.	CU4 420	6 - 50	4,250	955	56 - 195	Ø 25
		CU4 740	6 - 50	7,400	1,660	63 - 195	Ø 32
		CU4 1000	6 - 50	10,600	2,400	61 - 230	Ø 38
		CU4 1800	6 - 65	18,000	4,050	66 - 271	Ø 50
		CU4 2900	10 - 65	29,500	6,630	85 - 256	Ø 63
		CU4 4700	10 - 65	47,000	10,570	80 - 273	Ø 75
		CU4 7500	10 - 65	75,000	16,860	90 - 279	Ø 95
		CU4 11800	10 - 65	118,000	26,530	100 - 320	Ø 120
		CU4 18300	10 - 65	183,000	41,140	110 - 323	Ø 150
<b>CX</b>	Compact Xtreme CX gas springs provide extreme forces by enabling high charge pressures.	CX 500	10 - 80	5,100	1,150	75-145	Ø 32
		CX 1000	10 - 80	9,800	2,200	75-240	Ø 38
		CX 1900	10 - 80	19,200	4,320	80-245	Ø 50
<b>X</b>	The world's shortest, strongest and most advanced rod sealed gas springs.	X 170	7 - 125	1,700	382	44 - 285	Ø 19
		X 320	7 - 125	3,200	720	44 - 285	Ø 25
		X 350	10 - 125	3,600	810	30 + (2 x Stroke)	Ø 32
		X 500	10 - 125	4,700	1,055	30 + (2 x Stroke)	Ø 38
		X 750	10 - 125	7,400	1,665	32 + (2 x Stroke)	Ø 45
		X 1000	13 - 125	9,200	2,068	38 + (2 x Stroke)	Ø 50
		X 1500	13 - 125	15,000	3,375	44 + (2 x Stroke)	Ø 63
		X 2400	16 - 125	24,000	5,396	45 + (2 x Stroke)	Ø 75
		X 4200	16 - 125	42,000	9,440	58 + (2 x Stroke)	Ø 95
		X 6600	16 - 125	66,300	14,905	68 + (2 x Stroke)	Ø 120
		X 9500	19 - 125	95,000	21,400	78 + (2 x Stroke)	Ø 150
		X 20000	19 - 125	200,000	45,000	110+ (2 x Stroke)	Ø 195
<b>XG</b>	The Power Line XG series is based on the X series with the same features but additional total length providing a larger G 1/8" charge port and longer bottom threads.	XG 350	10 - 125	3,600	810	40 + (2 x Stroke)	Ø 32
		XG 500	10 - 125	4,700	1,055	40 + (2 x Stroke)	Ø 38
		XG 750	10 - 125	7,400	1,665	47 + (2 x Stroke)	Ø 45
		XG 1000	13 - 125	9,200	2,068	52 + (2 x Stroke)	Ø 50
		XG 1500	13 - 125	15,000	3,375	52 + (2 x Stroke)	Ø 63
		XG 2400	16 - 125	24,000	5,396	59 + (2 x Stroke)	Ø 75
		XG 4200	16 - 125	42,000	9,440	62 + (2 x Stroke)	Ø 95
		XG 6600	16 - 125	66,300	14,905	72 + (2 x Stroke)	Ø 120
<b>XF</b>	The Power Line XF series is based on the X series with the same features but additional 10 mm total length providing a larger G 1/8" charge port.	XF 750	10 - 125	7,400	1,665	42 + (2 x Stroke)	Ø 45
		XF 1000	13 - 125	9,200	2,068	48 + (2 x Stroke)	Ø 50
		XF 1500	13 - 125	15,000	3,375	54 + (2 x Stroke)	Ø 63
		XF 2400	16 - 125	24,000	5,396	55 + (2 x Stroke)	Ø 75

Series	Description	Gas spring model	Available stroke lengths	Initial force at max. pressure		Total length	Cylinder diameter
				(mm)	(N)		
TX	The Power Line Heavy Duty series, a crossover between the standard TU series and the Power Line X series. Total length same as TU, force same as X.	TX 750	13 - 200	7,400	1,665	85 + (2 x Stroke)	Ø 45
		TX 1000	13 - 300	9,200	2,068	95 + (2 x Stroke)	Ø 50
		TX 1500	13 - 300	15,000	3,375	95 + (2 x Stroke)	Ø 63
		TX 2400	25 - 300	24,000	5,396	110 + (2 x Stroke)	Ø 75
		TX 4200	25 - 300	42,000	9,440	120 + (2 x Stroke)	Ø 95
		TX 6600	25 - 300	66,300	14,905	140 + (2 x Stroke)	Ø 120
		TX 9500	25 - 300	95,000	21,400	155 + (2 x Stroke)	Ø 150
TL	The TL gas spring is shorter than the corresponding TU by 25 mm, except TL 5000 and TL 7500, which are 37.5 and 50 mm shorter respectively.	TL 750	12.5 - 250	7,400	1,665	70 + (2 x Stroke)	Ø 50
		TL 1500	12.5 - 250	15,000	3,375	85 + (2 x Stroke)	Ø 75
		TL 3000	12.5 - 250	30,000	6,750	95 + (2 x Stroke)	Ø 95
		TL 5000	25 - 250	50,000	11,240	102,5 + (2 x Stroke)	Ø 120
		TL 7500	25 - 250	75,000	16,860	105 + (2 x Stroke)	Ø 150
TU	The TU gas springs' dimensions are the basis of the ISO 11901 standard for gas springs as well as the Ford WDX and GM gas spring standards.	TU 250	10 - 125	2,650	600	50 + (2 x Stroke)	Ø 38
		TU 500	10 - 160	4,700	1,055	85 + (2 x Stroke)	Ø 45
		TU 750	12.7 - 300	7,400	1,665	95 + (2 x Stroke)	Ø 50
		TU 1500	25 - 300	15,000	3,375	110 + (2 x Stroke)	Ø 75
		TU 3000	25 - 300	30,000	6,750	120 + (2 x Stroke)	Ø 95
		TU 5000	25 - 300	50,000	11,240	140 + (2 x Stroke)	Ø 120
		TU 7500	25 - 300	75,000	16,860	155 + (2 x Stroke)	Ø 150
TUS	The High Speed gas springs (TUS) have been engineered to withstand press stroke speeds to a maximum of 2 m/s.	TUS 750	25 - 300	7,400	1,665	95 + (2 x Stroke)	Ø 50
		TUS 1500	25 - 300	15,000	3,375	110 + (2 x Stroke)	Ø 75
		TUS 3000	25 - 300	30,000	6,750	120 + (2 x Stroke)	Ø 95
		TUS 5000	25 - 300	50,000	11,240	140 + (2 x Stroke)	Ø 120
		TUS 7500	25 - 300	75,000	16,860	155 + (2 x Stroke)	Ø 150
LCF	These innovative Low Contact Force gas spring are 100% interchangeable with ISO gas springs (i.e. TU series) and reduce shock loads, noise levels and pad bounce problems.	LCF 750	12.7 - 300	7,400	1,665	95 + (2 x Stroke)	Ø 50
		LCF 1500	25 - 300	15,000	3,375	110 + (2 x Stroke)	Ø 75
		LCF 3000	25 - 300	30,000	6,750	120 + (2 x Stroke)	Ø 95
		LCF 5000	25 - 300	50,000	11,240	140 + (2 x Stroke)	Ø 120
		LCF 7500	25 - 300	75,000	16,860	155 + (2 x Stroke)	Ø 150
SPC	Speed Control™ reduce or eliminate blank holder bounce; commonly associated with increased return stroke speeds from new generation of presses.	SPC 750	80 - 300	7,400	1,665	110 + (2 x Stroke)	Ø 75
		SPC 1500	125 - 300	15,000	3,375	120 + (2 x Stroke)	Ø 95
		SPC 3000	125 - 300	30,000	6,750	140 + (2 x Stroke)	Ø 120
		SPC 5000	125 - 300	50,000	11,240	155 + (2 x Stroke)	Ø 150
MT	Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used up to 120°C.	MT 16	10 - 80	420	95	48 + (2 x Stroke)	M16x1.5
		MT 24	10 - 80	1,700	382	48 + (2 x Stroke)	M24x1.5
		MT 300	10 - 80	3,000	675	30 + (2 x Stroke)	Ø 32
		MT 500	10 - 80	4,700	1,055	30 + (2 x Stroke)	Ø 38
		MT 750	10 - 80	7,440	1,665	32 + (2 x Stroke)	Ø 45
		MT 1000	13 - 80	9,200	2,068	38 + (2 x Stroke)	Ø 50

# Gas Spring - contents

Initial force N 	Cylinder diameter mm 	Models 	Page
$F_{INIT} < 2,500$	Ø 12 Ø 32	EP3 16, EP2 24, EPS2 24 R12, R15, R19 M2, MM2, MC3, MC3-SP X 170 MT 16, MT 24	14
$2,500 \leq F_{INIT} < 5,000$	Ø 25 Ø 38	CU4 420 X 320, X 350, XG 350 TU 250, TM 250, TI 250, TMS 250 MT 300	42
$5,000 \leq F_{INIT} < 7,500$	Ø 38 Ø 45	CU4 740 CX 500, X 500, XG 500 K 500 TU 500 MT 500	60
$7,500 \leq F_{INIT} < 10,000$	Ø 45 Ø 75	X 750, XG 750, TL 750, TX 750 K 750, TU 750, TUS 750, LCF 750, SPC 750 MT 750	76
$10,000 \leq F_{INIT} < 25,000$	Ø 38 Ø 95	CU4 1000, CU4 1800, CX 1000, CX 1900 X 1000, XMS 1000, XG 1000, TX 1000, TL 1500, X 1500, XG 1500, TX 1500 X 2400, XG 2400, TX 2400 K 1500, TU 1500, TUS 1500, LCF 1500, SPC 1500 MT 1000	100
$25,000 \leq F_{INIT} < 50,000$	Ø 75 Ø 120	CU4 2900, CU4 4700 X 4200, XG 4200, TX 4200 TL 3000, TU 3000, TUS 3000, LCF 3000 SPC 3000	148
$50,000 \leq F_{INIT} < 75,000$	Ø 120 Ø 150	X 6600, XG 6600, TX 6600 TL 5000, TU 5000, TUS 5000, LCF 5000 SPC 5000	170
$75,000 \leq F_{INIT} < 100,000$	Ø 95 Ø 150	CU4 7500 X 9500, TX 9500 TL 7500, TU 7500, TUS 7500, LCF 7500	188
$F_{INIT} \geq 100,000$	Ø 120 Ø 195	CU4 11800, CU4 18300 TU 10000, TUR 10000 X 20000, TX 20000	204

## **KALLER Limited Warranty**

The warranties contained herein supersede all other warranties, expressed or implied, including those concerning the merchantability or suitability for a specific use or performance of the gas spring including its components.


The warranty period for replacement and or repaired gas springs shall not exceed the warranty period of the original defective gas spring. The warranty does not apply to any gas spring which has been damaged or misused or repaired by anyone other than KALLER® or its authorized representatives, or to any gas spring that has been altered by anyone other than KALLER® or its authorized representatives.

The customer shall notify KALLER® of all information pertaining to the defective gas spring including but not limited to serial number and date of installation so that KALLER® may determine the number of strokes incurred by the gas spring alleged to be defective. The customer shall be responsible for freight charges incurred in connection with the repair and/or replacement of any gas spring found to be defective.


KALLER® is not liable for injury, property damage, or other loss related to the inability to use the gas spring or failure of the gas spring, nor is KALLER® liable for any costs incurred relating to the removal and/or replacement of the gas spring. In no event is KALLER®'s liability to exceed the selling price of the gas spring. This warranty is void with respect to any gas spring damaged as a result of misuse, alteration, accident or neglect; failure to follow operating, maintenance and environmental instructions; repair by anyone other than KALLER®, its authorized representatives or trained service technicians acting in accordance with KALLER®'s service instructions and using components and supplies specified by KALLER.

**kaller.com**

## 2 | Overview - $F_{INIT} \leq 2500$

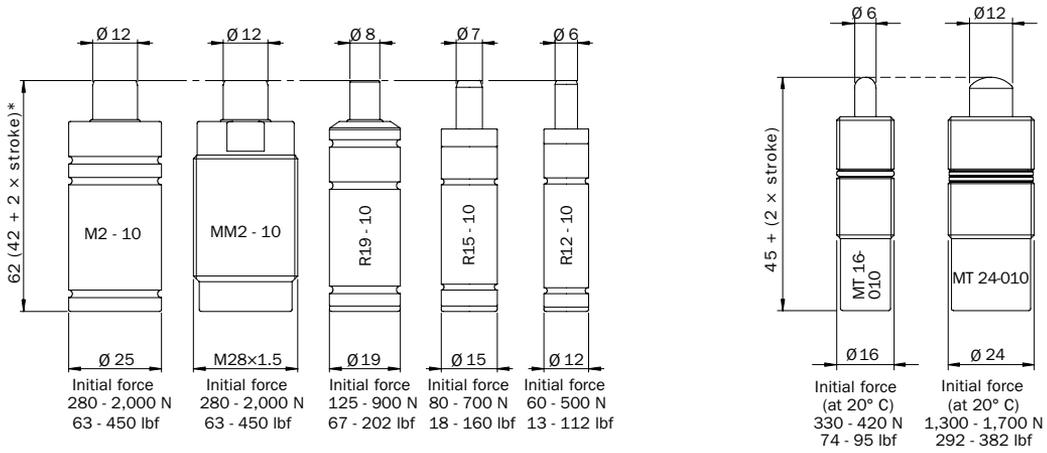

- \* Total length for M2 stroke length 63.5 mm and longer is  $45 + (2 \times \text{Stroke})$
- \* Total length for R12, R15 and R19 stroke length 63.5 mm and longer is  $45 + (2 \times \text{Stroke})$
- \* Total length for X 170 stroke length 75 mm and longer is  $35 + (2 \times \text{Stroke})$

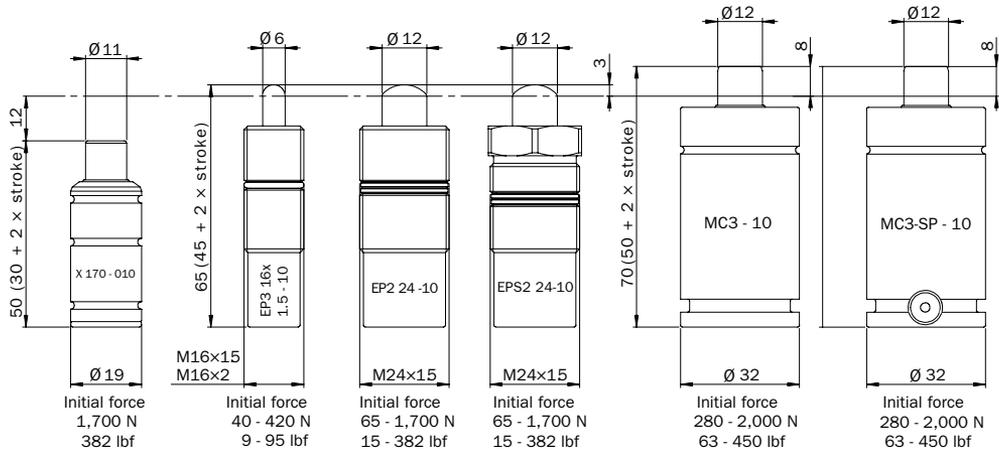

	Page
<b>EP3 16</b>	<b>16</b>
<b>EP2 24</b>	<b>18</b>
<b>EPS2 24</b>	<b>20</b>
<b>R12</b>	<b>22</b>
<b>R15</b>	<b>24</b>
<b>R19</b>	<b>26</b>
<b>M2</b>	<b>28</b>
<b>MM2</b>	<b>30</b>
<b>MC3</b>	<b>32</b>
<b>MC3-SP</b>	<b>34</b>
<b>X 170</b>	<b>36</b>
<b>MT 16</b>	<b>38</b>
<b>MT 24</b>	<b>40</b>

**EP3 16 gas springs (Ejector Pin with an M16 thread) are available in M16x1.5 and M16x2 thread size. For each thread size, six models are available. Four preset models (Green, Blue, Red & Yellow) and one adjustable model (Black), whose pre-charging pressure is 5-10 bar, intended for the customer to adjust the gas charge pressure. They are all color-coded to help identify the force rating and can be adjusted and re-charged to meet individual force requirements.**



## Basic information

For general information see "About gas springs".

Pressure medium ..... Nitrogen  
 Max. charging pressure (at 20°C) ..... 150 bar  
 Min. charging pressure (at 20°C) ..... 10 bar  
 Operating temperature ..... 0 to +80°C  
 Force increase by temperature ..... 0.3%/°C  
 Recommended max strokes/min (at 20°C)..... ~ 100  
 Max piston rod velocity ..... 1.6 m/s  
 Rod surface ..... Nitrided  
 Tube surface ..... Black Oxide  
 Repair kit ..... Non-repairable

Automotive standard: VDI 3004, ISO 20928, WDX35-60-3016xxx,  
 GMGDS 90.25.97, 39-670-005x, GMGDS 90.80.46



## How to order

### EP3 16x1.5 - 10 - Blue

**Model:** \_\_\_\_\_ **Force:** Green, Blue, Red, Yellow, Black



**Thread:** x1.5 = M16x1.5  
 x2 = M16x2 **Stroke length: (mm)**  
 (10, 20, 30, 40, 50, 60, 70, 80, 100, 125)

Model	Initial force at +20°C		Color	Charging pressure (bar)	Isothermal end force at + 20°C, at full stroke	
	in N	in lbf			in N	in lbf
EP3 16x1.5/x2	57	13	Green	20	95	21
EP3 16x1.5/x2	110	25	Blue	40	190	43
EP3 16x1.5/x2	210	47	Red	75	360	81
EP3 16x1.5/x2	420	95	Yellow	150	715	160
EP3 16x1.5/x2 XX*	28-420	9-95	Black	10-150	64-715	14-160

\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

S stroke	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
10	65	55	0.002	0.06
20	85	65	0.003	0.07
30	105	75	0.003	0.07
40	125	85	0.004	0.08
50	145	95	0.005	0.08
60	165	105	0.005	0.09
70	185	115	0.006	0.10
80	205	125	0.006	0.11
100	245	145	0.008	0.11
125	295	170	0.010	0.13

■ Recommended stroke length for optimal delivery.

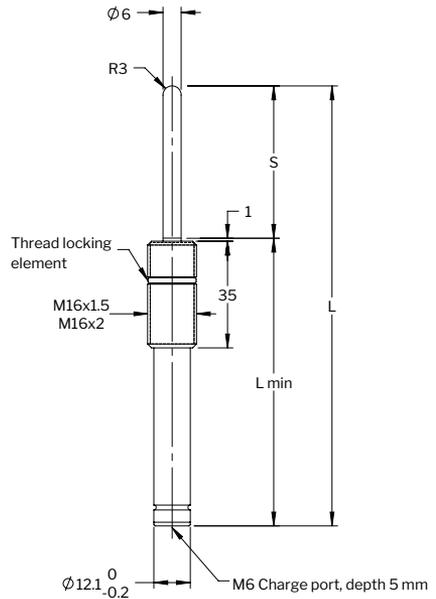


### Installation tool




Order No. 3021000


### EPS3 16

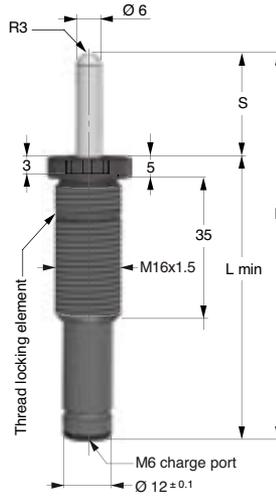

Also available with shoulder as per GM-Standard 90.80.45. Contact your local distributor or Strömsholmen AB for more information.



### Mounting possibilities

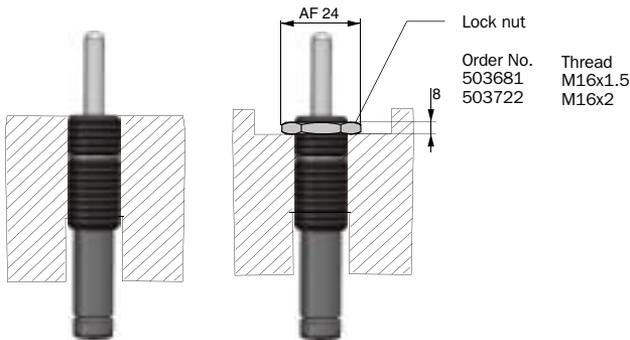

**EP2 24 (Ejector Pin with an M24 thread). Four preset models are available. Each model is color-coded for easy identification of force rating. If needed, these models can be re-charged or adjusted to meet individual force requirements. A special model (black), which is delivered with a precharge of 5 to 10 bar, is also available and is intended for adjustment to the desired force.**



## Basic information


For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	10 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C).....	~ 30-80
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	Non-repairable

Automotive standard: VDI 3004, ISO 20928, WDX35-60-3024080,  
GMGDS 90.25.95, 39-670-005x, 39-67-0061, WDX35-60-3024110,  
WDX35-60-3024140



## How to order


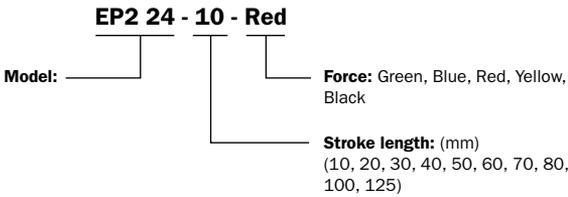


Model	Initial force at +20°C		Color	Charging pressure (bar)	Isothermal end force at +20°C, at full stroke	
	in N	in lbf			in N	in lbf
EP2 24	230	52	Green	20	390	90
EP2 24	450	101	Blue	40	800	180
EP2 24	850	191	Red	75	1,500	340
EP2 24	1,700	382	Yellow	150	2,900	650
EP2 24 XX*	113-1,700	25-382	Black	10-150	110-2,900	25-650

\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

S stroke	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
10	65	55	0.003	0.13
20	85	65	0.006	0.15
30	105	75	0.008	0.17
40	125	85	0.011	0.19
50	145	95	0.012	0.21
60	165	105	0.014	0.23
70	185	115	0.017	0.25
80	205	125	0.019	0.27
100	245	145	0.024	0.31
125	295	170	0.030	0.35

■ Recommended stroke length for optimal delivery.

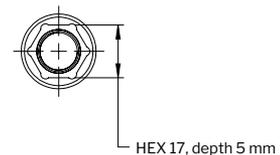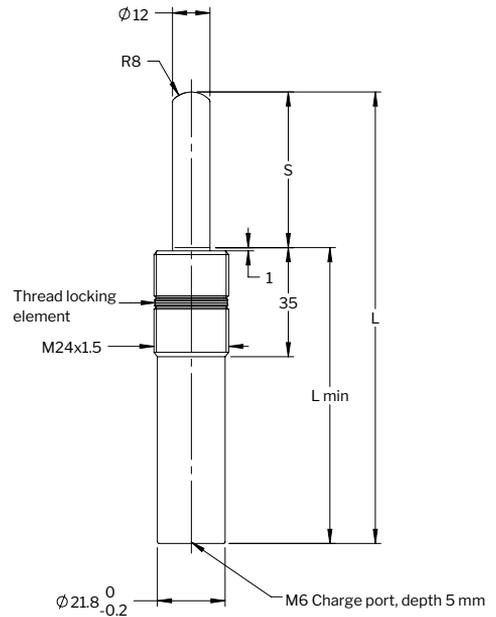


## Installation tool



Order No. 3021000

## Mounting possibilities

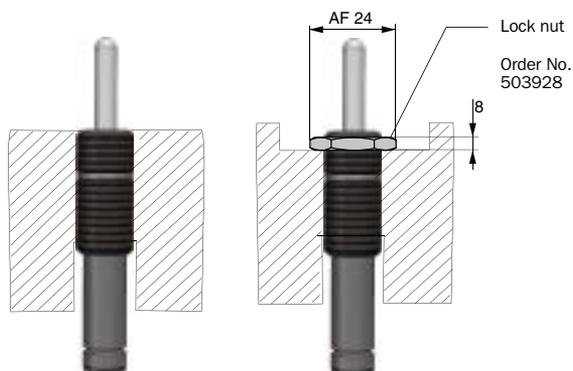

**EPS2 24 (Ejector Pin Special with an M24 thread). It is available with four pre-set models. Each model is color-coded for easy identification of force rating. If needed, these models can be re-charged or adjusted to meet individual force requirements. Also available is a model (black) which is delivered with a pre-charge of 5 to 10 bar, intended to be adjusted to the desired force.**



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	6 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-80
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	Non-repairable

Automotive standard: WDX35-80-19xxx10, WDX35-80-19xxx15, WDX35-80-19xxx25, WDX35-80-19xxx38, WDX35-80-19xxx50, WDX35-80-19xxx80



## How to order

**EPS2 24 - 10 - Green**

Model:

Force: Green, Blue, Red, Yellow, Black


Stroke length: (mm)  
(10, 16, 20, 25, 30, 38, 40, 50, 60, 70, 80, 100, 125)

Model	Initial force at +20°C		Color	Charging pressure (bar)	Isothermal end force at +20°C, at full stroke	
	in N	in lbf			in N	in lbf
EPS2 24	230	52	Green	20	390	90
EPS2 24	450	101	Blue	40	800	180
EPS2 24	850	191	Red	75	1,500	340
EPS2 24	1,700	382	Yellow	150	2,900	650
EPS2 24 XX*	65-1,700	15-382	Black	6-150	110-2,900	25-650

\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

S stroke	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
10	65	55	0.005	0.14
16	77	61	0.006	0.15
20	85	65	0.007	0.16
25	95	70	0.008	0.17
30	105	75	0.010	0.18
38	121	83	0.011	0.19
40	125	85	0.012	0.20
50	145	95	0.014	0.21
60	165	105	0.017	0.23
70	185	115	0.019	0.25
80	205	125	0.022	0.27
100	245	145	0.026	0.31
125	295	170	0.032	0.36

■ Recommended stroke length for optimal delivery.

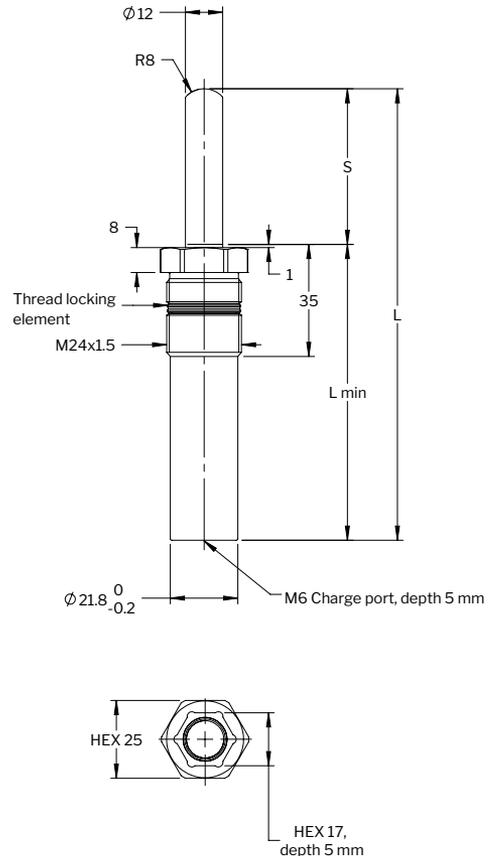

## Installation tool



Order No. 3021000

## Mounting possibilities



The R series was named because the tube is Rollformed and therefore permanently closed, making these springs non-repairable. R series springs are available with Ø12, Ø15, and Ø19 mm tube diameters and with stroke lengths up to 125 mm. There are 4 color-coded models, all with preset forces. An adjustable model (black) is also available. It can be ordered either set to a specific charge pressure or it can be adjusted by customers with the appropriate charging equipment and training.



## Basic information

For general information see "About gas springs".

Pressure medium ..... Nitrogen  
 Max. charging pressure (at 20°C) ..... 180 bar  
 Min. charging pressure (at 20°C) ..... 20 bar  
 Operating temperature ..... 0 to +80°C  
 Force increase by temperature ..... 0.3 %/°C  
 Recommended max. strokes/min (at 20°C) ..... ~40 – 100  
 Max. piston rod velocity ..... 1.6 m/s  
 Rod surface ..... Nitrided  
 Tube surface ..... Black oxide  
 Repair Kit ..... Non-repairable



## How to order

**R12 - 7 - Blue**


Model:

Force: Green, Blue, Red, Yellow, Black, state desire force in N

Stroke length: (mm)  
 (7, 10, 12.7, 15, 19, 25, 38, 50, 63.5, 75, 80, 100, 125)

Model	Force in N at +20°C	Force in lbf at +20°C	Color	Charging pressure (bar)
	in N	in lbf		
R12	130	29	Green	45
R12	250	56	Blue	90
R12	380	85	Red	135
R12	500	112	Yellow	180
R12 XX*	60-500	13-112	Black	20-180


\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

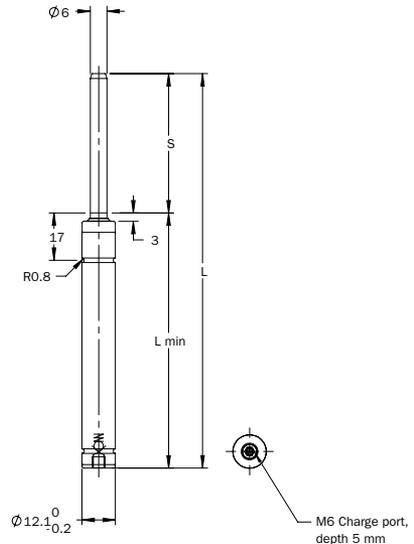

S stroke	Isothermal end force in N at +20°C **				Isothermal end force in lbf at +20°C **				L ±0.25	L min.	Gas vol. (l)	Weight (kg)
	R12	R12	R12	R12	R12	R12	R12	R12				
7	149	299	448	597	34	67	101	134	56	49	0.001	0.03
10	158	317	475	634	36	71	107	143	62	52	0.001	0.03
12.7	164	329	493	657	37	74	111	148	67.4	54.7	0.001	0.03
15 ■	168	335	503	670	38	75	113	151	72	57	0.002	0.03
19	172	344	517	689	39	77	116	155	80	61	0.002	0.04
25 ■	177	354	530	707	40	80	119	159	92	67	0.002	0.04
38 ■	183	365	548	730	41	82	123	164	118	80	0.003	0.04
50 ■	185	371	556	742	42	83	125	167	142	92	0.004	0.05
63.5	197	395	592	789	44	89	133	178	172	108.5	0.005	0.06
75	197	394	591	788	44	89	133	178	195	120	0.006	0.06
80	207	414	620	827	47	93	139	186	205	125	0.006	0.07
100	204	409	613	817	46	92	138	184	245	145	0.008	0.07
125	202	405	607	810	45	91	137	182	295	170	0.010	0.09

\*\* at full stroke ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

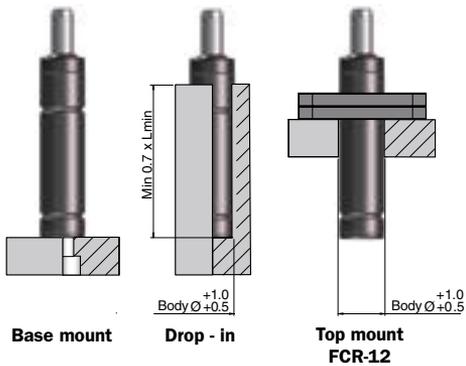

only to be used for  
strokes 7-25 mm

## Recommended mounts



FCR-12

 233

## Additional mounts

FC-12

 232

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The R series was named because the tube is Roll-formed and therefore permanently closed, making these springs non-repairable. R series springs are available with Ø12, Ø15, and Ø19 mm tube diameters and with stroke lengths up to 125 mm. There are 4 color-coded models, all with preset forces. An adjustable model (black) is also available. It can be ordered either set to a specific charge pressure or it can be adjusted by customers with the appropriate charging equipment and training.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	20 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3 %/°C
Recommended max. strokes/min (at 20°C) .....	~100 – 150
Max. piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair Kit .....	Non-repairable




## How to order

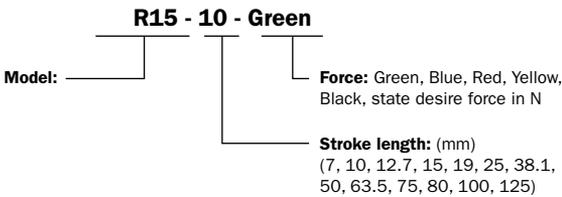

Model	Force in N at +20°C	Force in lbf at +20°C	Color	Charging pressure (bar)
	in N	in lbf		
R15	180	40	Green	45
R15	350	80	Blue	90
R15	500	115	Red	135
R15	700	160	Yellow	180
R15 XX*	80-700	18-160	Black	20-180


\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

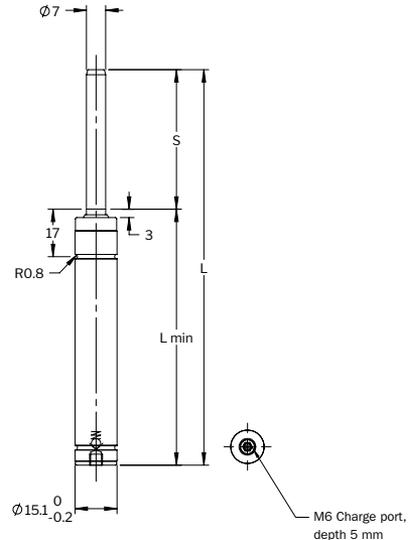

S stroke	Isothermal end force in N at +20°C **				Isothermal end force in lbf at +20°C **				L ±0.25	L min.	Gas vol. (l)	Weight (kg)
	R15	R15	R15	R15	R15	R15	R15	R15				
7	216	432	648	865	49	97	146	195	56	49	0.001	0.05
10	224	447	671	895	50	101	151	201	62	52	0.001	0.05
12.7	228	457	685	914	51	103	154	206	67.4	54.7	0.001	0.05
15	232	463	695	927	52	104	156	209	72	57	0.002	0.05
19	236	471	707	943	53	106	159	212	80	61	0.002	0.05
25	240	480	720	961	54	108	162	216	92	67	0.002	0.06
38.1	258	516	774	1,032	58	116	174	232	118.2	80.1	0.003	0.07
50	258	516	774	1,033	58	116	174	232	142	92	0.004	0.08
63.5	273	546	819	1,092	61	123	184	246	172	108.5	0.005	0.09
75	270	541	811	1,982	61	122	182	243	195	120	0.006	0.10
80	270	539	809	1,079	61	121	182	243	205	125	0.006	0.11
100	267	534	802	1,069	60	120	180	240	245	145	0.008	0.12
125	265	531	796	1,062	60	119	179	239	295	170	0.010	0.14

\*\* at full stroke

## Mounting possibilities

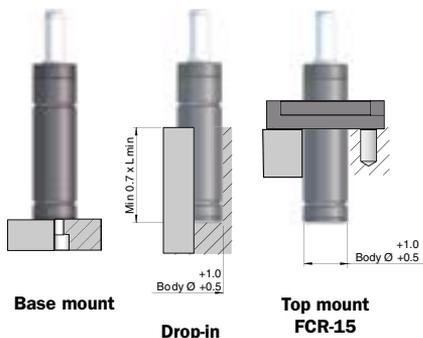

only to be used for strokes 7-25 mm

## Recommended mounts



FCR-15

 233

## Additional mounts

FC-15

 232

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The R series get their name from the fact their tube is roll formed and therefore permanently closed, making them non-repairable. R series springs are available with Ø 12, Ø 15, and Ø 19 mm tube diameters and with stroke lengths up to 125 mm. There are 4 color-coded models, whose forces are preset. An adjustable model (black) is also available, that can be ordered to a specific charge pressure or adjusted by customers with the appropriate charging equipment and training.



## Basic information

For general information see "About gas springs".

Pressure medium ..... Nitrogen  
 Max. charging pressure (at 20°C) ..... 180 bar  
 Min. charging pressure (at 20°C) ..... 25 bar  
 Operating temperature ..... 0 to +80°C  
 Force increase by temperature ..... 0.3%/°C  
 Recommended max strokes/min (at 20°C) ..... ~ 100-150  
 Max piston rod velocity ..... 1.6 m/s  
 Rod surface ..... Nitrided  
 Tube surface ..... Black oxide  
 Repair kit ..... Non-repairable



Automotive standard: VDI 3003-Blatt 2, ISO 11901-1-900, WDX35-80-3607xxxx, WDX35-80-3615xxxx, WDX35-80-3625xxxx, WDX35-80-3638xxxx, WDX35-80-3650xxxx, 39D878xx, B2 4005 21712xx, B2 4005 21680xx, B2 4005, 21729xx, 03326xx, 0529565, 0332739, 05755xx, 39-670-67xx, WDX35-80-19xxxx

## How to order

**R19 - 7 - Yellow**


Model:

Force: Green, Blue, Red, Yellow, Black, state desire force in N

Stroke length: (mm)  
 (7, 10, 15, 25, 38.1, 50, 63.5, 80, 100, 125)

Model	Force in N at +20°C	Force in lbf at +20°C	Color	Charging pressure (bar)
	in N	in lbf		
R19	300	67	Green	60
R19	500	112	Blue	100
R19	700	157	Red	140
R19	900	202	Yellow	180
R19 XX *	125-900	67-202	Black	25-180


\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

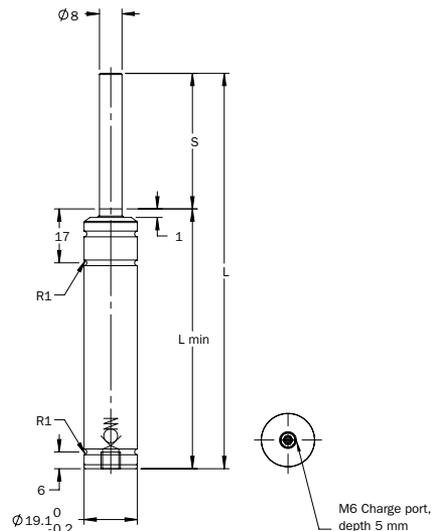

S stroke	Isothermal end force in N at +20°C **				Isothermal end force in lbf at +20°C **				L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
	R19	R19	R19	R19	R19	R19	R19	R19					
7	530	880	1,200	1,600	119	199	270	360	56	49	0.003	0.07	
10	470	780	1,100	1,400	105	175	247	315	62	52	0.003	0.08	
12	444	740	1,040	1,330	100	166	233	299	66	54	0.004	0.08	
15 ■	440	730	1,000	1,300	99	164	225	292	72	57	0.004	0.08	✓
25 ■	420	700	980	1,300	94	157	220	292	92	67	0.006	0.08	✓
38.1 ■	410	690	970	1,200	92	155	218	270	118.2	80.1	0.009	0.10	✓
50 ■	410	680	960	1,200	92	152	216	270	142	92	0.011	0.12	✓
63.5	410	680	950	1,200	92	152	214	270	172	108.5	0.014	0.13	✓
80	410	680	950	1,200	92	152	214	270	205	125	0.018	0.14	✓
100	410	670	940	1,200	92	152	214	270	245	145	0.022	0.17	✓
125	410	670	940	1,200	92	152	214	270	295	170	0.027	0.20	✓


\*\* at full stroke ■ Recommended stroke length for optimal delivery.

## Installation tool



Installation Tool  
for threaded sleeve  
**Order No. 3020618**

## R19

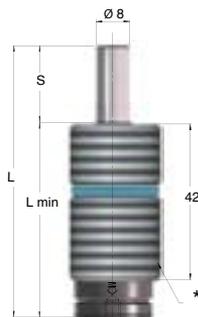


Also available with  
threaded sleeve -TM or -TI

**Order no. example**  
**R19-Stroke-Color-TM**  
**R19-Stroke-Color-TI**

\* **TM = M24 x 1,5**  
**or TI = 1" - 8 UNC**

\* Please note that when the threaded sleeve is used, the max stroke length is reduced by 3 mm and Lmin is increased by 3 mm.

## Mounting possibilities

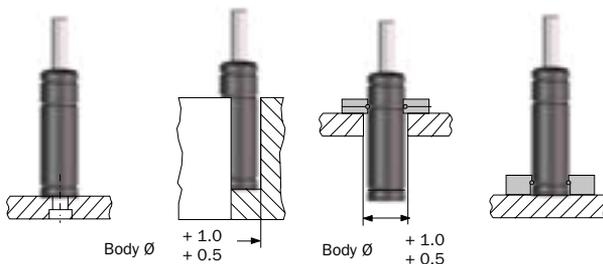

**Base mount**

only to be used for  
strokes 7-25 mm

**Drop - in**

**Top mount**  
**FCR**

**Foot mount**

**BF-19**  
only to be used for  
strokes 7-25 mm

## Recommended mounts



BF-19

228

FCR-90

234

FCR-19 VDI2

233

## Additional mounts

FC-19

232

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The M2 is available in four preset models, with initial forces from 500 to 2000 N. The gas spring is designed to meet the ISO-dimension found in ISO 11901 as well as in VDI 3003. Each spring is color-coded for easy identification of force rating. This gas spring is also available with adjustable force (black) that can be customized to meet individual force requirements.

The adjustable model may be set to desired pressure when ordered. The M2 spring can in many cases directly replace mechanical die springs of 25 mm (1 inch) diameter. All M2 springs can be repaired and recharged. The spring can be attached to the tool, using a mount (FCR or SM). The M6 thread in the base of the spring is used for charging and is also a mounting option.



## Basic information


For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C).....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3016385




Automotive standard: VDI 3003-Blatt 2, ISO 11901-1-2000, 39D878xx, B2 4005 2172962, B2 4005 21680xx, 03326xx, 0529566, 0332740, 05295xx, Z000351514, Z000213263, Z000260312, N000739808, 39-670-18xx, 304502x, 304503x

## How to order

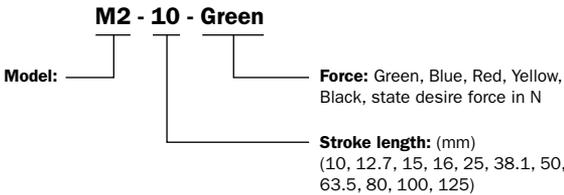

Model	Force in N at +20°C		Color	Charging pressure (bar)
	in N	in lbf		
M2	500	110	Green	45
M2	1,000	225	Blue	90
M2	1,500	340	Red	135
M2	2,000	450	Yellow	180
M2 XX*	280-2,000	63-450	Black	25-180


\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

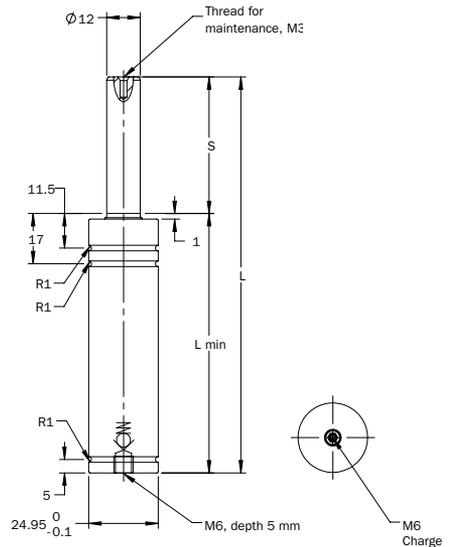

S stroke	Isothermal end force in N at +20°C **				Isothermal end force in lbf at +20°C **				L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
	M2	M2	M2	M2	M2	M2	M2	M2					
10	770	1,530	2,300	3,060	173	344	689	689	62	52	0.005	0.14	
12.7	770	1,530	2,300	3,070	173	344	690	690	67.4	54.7	0.006	0.15	
15	770	1,540	2,310	3,070	173	346	690	690	72	57	0.007	0.16	✓
16	770	1,540	2,310	3,070	173	346	690	690	74	58	0.007	0.16	
25	770	1,540	2,310	3,080	173	346	692	692	92	67	0.010	0.18	✓
38.1	770	1,540	2,320	3,090	173	346	695	695	118.2	80.1	0.015	0.20	✓
50	770	1,540	2,320	3,090	173	346	695	695	142	92	0.019	0.22	✓
63.5	760	1,520	2,270	3,020	171	342	679	679	172	108.5	0.024	0.26	✓
80	760	1,520	2,280	3,040	171	342	683	683	205	125	0.029	0.30	✓
100	760	1,520	2,290	3,050	171	342	686	686	245	145	0.036	0.33	✓
125	760	1,530	2,290	3,060	171	344	689	689	295	170	0.044	0.39	✓

\*\* at full stroke

## Mounting possibilities

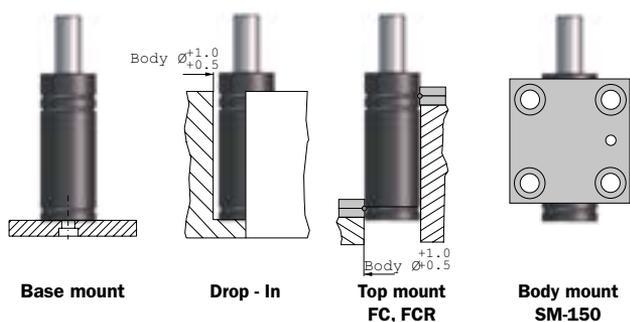

## Recommended mounts



## Additional mounts



## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The MM2 is a version of the M2 spring with a threaded body, (M28 x 1.5). All internal parts and technical data are the same as for M2 springs (with the exception of strokes 63.5 to 125 whose total lengths are 3 mm shorter). Each spring is color-coded for easy identification of force rating.

We also offer a model with adjustable force (black) that can be customized to meet individual force requirements. The adjustable model may be set to desired pressure when ordered. All MM2 springs can be repaired and recharged. For locking the spring in the tool the FRM-150 lock nut is available.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3016385



## How to order


**Model:** **MM2 - 10 - Black**

**Force:** Green, Blue, Red, Yellow, Black, state desire force in N

**Stroke length:** (mm)  
(10, 12.7, 15, 16, 25, 38.1, 50, 63.5, 80, 100, 125)

Model	Force in N at +20°C	Force in lbf at +20°C	Color	Charging pressure (bar)
	in N	in lbf		
MM2	500	110	Green	45
MM2	1,000	225	Blue	90
MM2	1,500	340	Red	135
MM2	2,000	450	Yellow	180
MM2 XX*	280-2,000	63-450	Black	25-180


\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

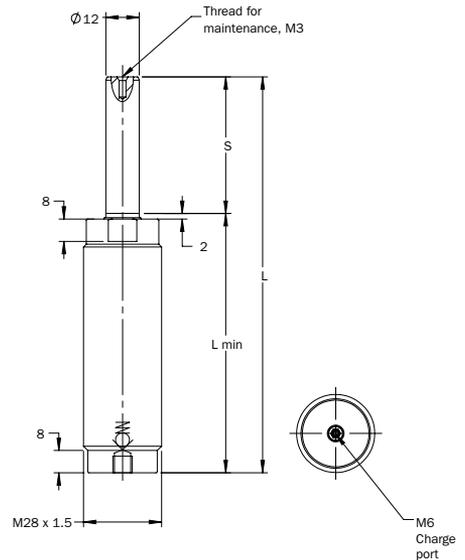

S stroke	Isothermal end force in N at +20°C**				Isothermal end force in lbf at +20°C**				L ±0.25	L min.	Gas vol. (l)	Weight (kg)
	MM2	MM2	MM2	MM2	MM2	MM2	MM2	MM2				
10	770	1,530	2,300	3,060	173	344	517	689	62	52	0.005	0.14
12.7	770	1,530	2,300	3,070	173	344	517	690	67.4	54.7	0.006	0.15
15	770	1,540	2,310	3,070	173	346	519	690	72	57	0.007	0.16
16	770	1,540	2,310	3,070	173	346	519	690	74	58	0.007	0.16
25	770	1,540	2,310	3,080	173	346	519	692	92	67	0.010	0.18
38.1	770	1,540	2,320	3,090	173	346	522	695	118.2	80.1	0.015	0.20
50	770	1,540	2,320	3,090	173	346	522	695	142	92	0.019	0.22
63.5	760	1,520	2,270	3,020	171	342	510	679	169	105.5	0.024	0.26
80	760	1,520	2,280	3,040	171	342	513	683	202	122	0.029	0.30
100	760	1,520	2,290	3,050	171	342	515	686	242	142	0.036	0.33
125	760	1,530	2,290	3,060	171	344	515	689	292	167	0.044	0.39

\*\* at full stroke

## Mounting possibilities



Thread mount  
FRM

## Recommended mounts



FRM-150

 240

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The MC3 spring is based on the M2 spring, using the same piston rod and internal components. The body of the spring and the mount are designed to meet the ISO dimension found in ISO 11901 as well as in VDI 3003.

Each spring is color-coded for easy identification of force rating. We also offer a model with adjustable force (black) that can be customized to meet individual force requirements. The adjustable model may be set to the desired pressure when ordered. The spring can be attached to the tool, using an FCS or FFC mount. The M6 thread in the base of the spring is used for charging and is also a mounting option.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3016385



Automotive standard: VDI 3003, ISO 11901-1-1500, GMGDS 90.25.00-1.5, 39D878xx, B2 4005 21712xx, 03322xx, Z000332028, Z000299476, Z000332029, N000382204, Z000347117, Z000174638, Z000295927, R100036114, X346590726, X346590651, R100036118, 39-673-563x, 39-673-564x

## How to order

**MC3 - 10 - Green**


**Model:** \_\_\_\_\_

**Force:** Green, Blue, Red, Yellow, Black, state desire force in N

**Stroke length:** (mm)  
(10, 12.7, 16, 25, 38.1, 50, 63.5, 80, 100, 125)

Model	Force in N at +20°C		Color	Charging pressure (bar)
	in N	in lbf		
MC3	500	110	Green	45
MC3	1,000	225	Blue	90
MC3	1,500	340	Red	135
MC3	2,000	450	Yellow	180
MC3 XX*	280-2,000	63-450	Black	25-180

\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

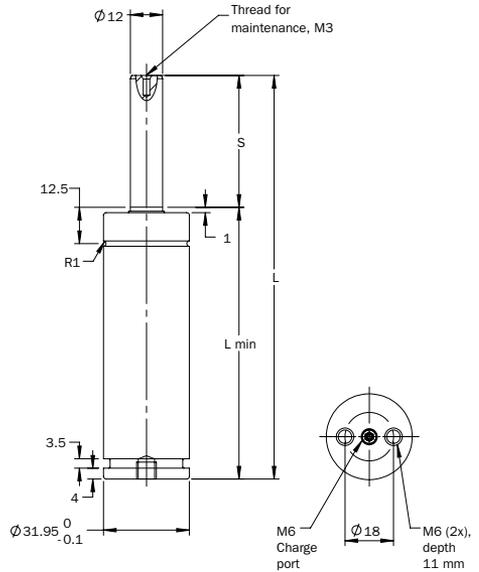

S stroke	Isothermal end force in N at +20°C**				Isothermal end force in lbf at +20°C**				L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
	MC3	MC3	MC3	MC3	MC3	MC3	MC3	MC3					
10	770	1,530	2,300	3,060	173	344	517	688	70	60	0.005	0.30	√
12.7	770	1,530	2,300	3,070	173	344	517	690	75.4	62.7	0.006	0.31	
16	770	1,540	2,310	3,070	173	340	519	690	82	66	0.007	0.33	√
25	770	1,540	2,310	3,080	173	340	519	692	100	75	0.010	0.38	√
38.1	770	1,540	2,320	3,090	173	340	522	695	126.2	88.1	0.015	0.43	
50	770	1,540	2,320	3,090	173	340	522	695	150	100	0.019	0.48	√
63.5	760	1,520	2,270	3,020	171	342	510	679	177	113.5	0.024	0.54	
80	760	1,520	2,280	3,040	171	342	513	683	210	130	0.029	0.62	√
100	760	1,520	2,290	3,050	171	342	515	686	250	150	0.036	0.71	√
125	760	1,530	2,290	3,060	171	342	515	688	300	175	0.044	0.83	√

\*\* at full stroke



The MC3-SP spring is equipped with a M6 side charge port. The body of the spring and the mount are designed to meet the ISO dimension found in ISO 11901 as well as in VDI 3003 and the current GM standard, GMGDS 90.25.00-1.5-XXX.

Each spring is color-coded in red or black for easy identification of force rating. The adjustable force (black) can be customized to meet individual force requirements. The adjustable model may be set to the desired pressure when ordered from us or by customers with charging equipment. The spring can be attached to the tool, using an FC-MC or FFC-MC mount.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3016385



## How to order

**MC3-SP - 10 - Red**


**Model:** \_\_\_\_\_

**Force:** Red, Black, state desire force in N

**Stroke length:** (mm)  
(10, 12.7, 16, 25, 38.1, 50, 63.5, 80, 100, 125)

Model	Force in N at +20°C		Color	Charging pressure (bar)
	in N	in lbf		
MC3-SP	1,500	340	Red	135
MC3-SP*	280-2,000	63-450	Black	25-180


\* Force to be set by the customer. Delivered with a pre-charge of 5-10 bar.

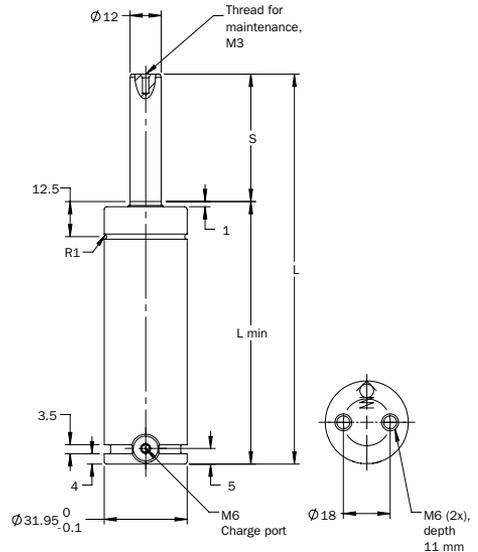


S stroke	Isothermal end force in N at +20°C **		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
	MC3-SP	MC3-SP					
10	2,300	517	70	60	0.005	0.30	√
12.7	2,300	517	75.4	62.7	0.006	0.31	
16	2,310	519	82	66	0.007	0.33	√
25	2,310	519	100	75	0.010	0.38	√
38.1	2,320	522	126.2	88.1	0.015	0.43	
50	2,320	522	150	100	0.019	0.48	√
63.5	2,270	510	177	113.5	0.024	0.54	
80	2,280	513	210	130	0.029	0.62	√
100	2,290	515	250	150	0.036	0.71	√
125	2,290	515	300	175	0.044	0.83	√

\*\* at full stroke

### Mounting possibilities

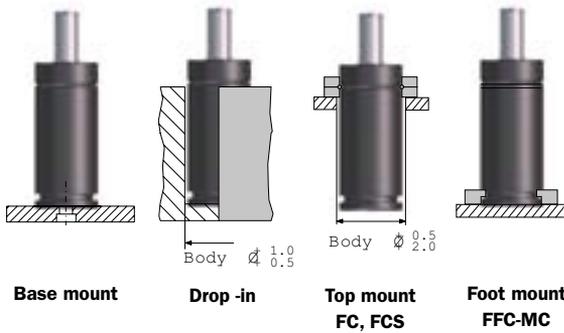

### Recommended mounts

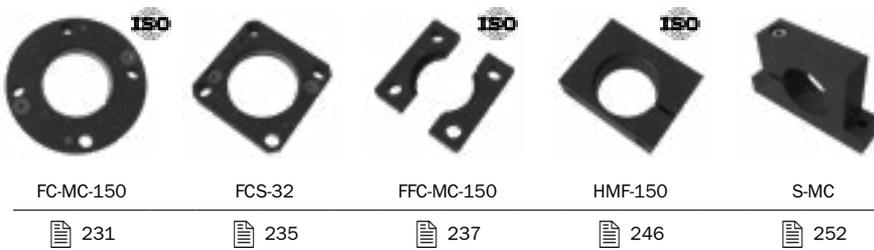

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact profile.

The Power Line springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. The X 170 has a bottom port for gas charging that can also be used to connect to a gas link system. The X 170 has an upper ISO Standard C-groove and a lower C-groove, which together with a threaded bottom hole offer various mounting possibilities using our standard mounts.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	Non-repairable




Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-1700, 39D997x, B2 4005 21723xx, 04584xx, 39-673-020x, 90201401941,

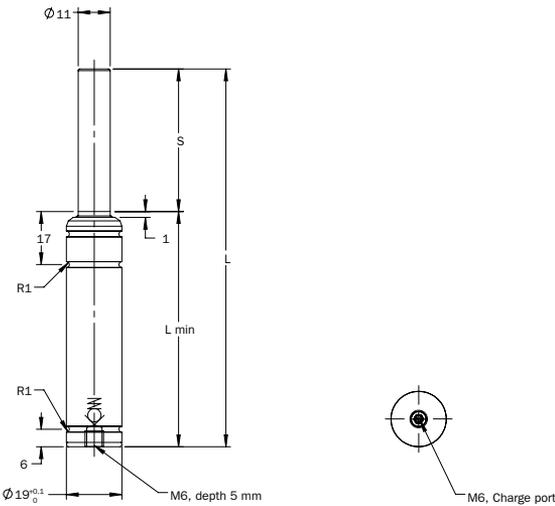

Order No.	S stroke	Force in N at 180 bar/+20°C		Force in lbf at 180 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 170-007	7	1,700	2,800	382	630	44	37	0.002	0.06	
X 170-010	10					50	40	0.002	0.06	✓
X 170-015	15					60	45	0.004	0.07	✓
X 170-019	19					68	49	0.005	0.07	
X 170-025	25 ■					80	55	0.006	0.08	✓
X 170-032	32					94	62	0.008	0.08	
X 170-038	38 ■					106	68	0.009	0.09	✓
X 170-050	50 ■					130	80	0.012	0.10	✓
X 170-063	63 ■					156	93	0.015	0.12	✓
X 170-075	75					185	110	0.018	0.14	
X 170-080	80					195	115	0.019	0.14	✓
X 170-100	100					235	135	0.024	0.16	✓
X 170-125	125	285	160	0.030	0.19	✓				

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.


## Mounting possibilities

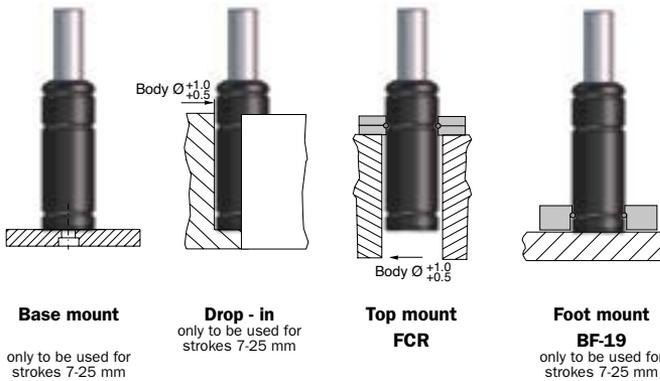

## Recommended mounts



## Additional mounts



### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**Mould Temp gas springs have been engineered to withstand higher operating temperatures, like those commonly associated with plastic molding tools. Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used at operating temperatures up to 120°C.**



## Features


- For applications up to 120°C
- Fully adjustable charge pressure
- Various mounting possibilities using our standard mounts as well as bottom threaded holes
- MT 16 and MT 24 have threaded upper cylinders for easy and adjustable mounting
- M6 gas ports that can be connected to the special high temp version of our Micro EO24™ Hose and Tube system for remote pressure control



## Basic information

For general information see "About gas springs".

Pressure medium ..... Nitrogen  
 Max. charging pressure (at 20°C) ..... See table below  
 Min. charging pressure (at 20°C) ..... 25 bar  
 Operating temperature ..... 0 to +120°C  
 Force increase by temperature ..... 0.3%/°C  
 Recommended max strokes/min ..... See table below  
 Max piston rod velocity ..... 1.0 m/s  
 Service life (0 to 80°C) ..... 1,000,000 strokes  
 or ..... 100,000 stroke meters  
 Service life (80 to 120°C) ..... 500,000 strokes  
 or ..... 50,000 stroke meters  
 Rod surface ..... Nitrided  
 Tube surface ..... Black oxide  
 Repair kit ..... Non-repairable

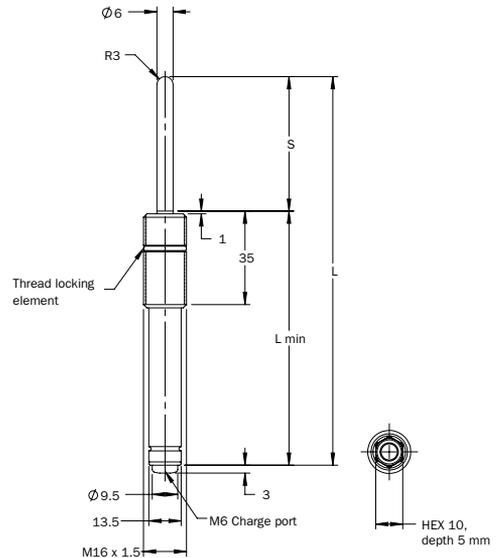

Max. working temp. interval	Max. strokes per minute (spm)	Max. charge pressure at 20°C (bar)	Force per temperature		
			Spring temp.	Initial force (N)	End force* (N)
0 - 80°C	20	150	80°C (20°C)	510 (420)	810 (670)
80 - 100°C	15	125	100°C (20°C)	450 (355)	720 (570)
100 - 120°C	10	115	120°C (20°C)	435 (325)	700 (520)

Order No.	S stroke	Initial force in N at 150 bar/+20°C	Initial force in lbf at 150 bar/+20°C	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
MT 16-010	10	420	95	65	55	0.002	0.06
MT 16-020	20			85	65	0.003	0.07
MT 16-030	30			105	75	0.003	0.07
MT 16-040	40			125	85	0.004	0.08
MT 16-050	50			145	95	0.005	0.09
MT 16-060	60			165	105	0.006	0.10
MT 16-070	70			185	115	0.007	0.11
MT 16-080	80			205	125	0.008	0.11

\* Isothermal end force at full stroke.

## Installation tool



Order No. 3021000

## Mounting possibilities



### Thread mount

Lock nut available  
M16x1.5 503681

## Additional mounts

FRM-16

 240

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

Mould Temp gas springs have been engineered to withstand higher operating temperatures, like those commonly associated with plastic molding tools. Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used at operating temperatures up to 120°C.



## Features


- For applications up to 120°C
- Fully adjustable charge pressure
- Various mounting possibilities using our standard mounts as well as bottom threaded holes
- MT 16 and MT 24 have threaded upper cylinders for easy and adjustable mounting
- M6 gas ports can be connected to the special high temp version of our Micro EO24™ Hose and Tube system for remote pressure control



## Basic information

For general information see "About gas springs".

Pressure medium	Nitrogen
Max. charging pressure (at 20°C)	See table below
Min. charging pressure (at 20°C)	25 bar
Operating temperature	0 to +120°C
Force increase by temperature	0.3%/°C
Recommended max strokes/min	See table below
Max piston rod velocity	1.0 m/s
Service life (0 to 80°C)	1,000,000 strokes
or	100,000 stroke meters
Service life (80 to 120°C)	500,000 strokes
or	50,000 stroke meters
Rod surface	Nitrided
Repair kit	Non-repairable

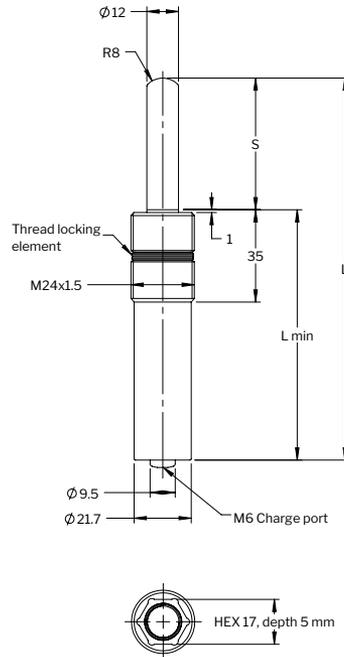

Max. working temp. interval	Max. strokes per minute (spm)	Max. charge pressure at 20°C (bar)	Force per temperature		
			Spring temp.	Initial force (N)	End force* (N)
0 - 80°C	20	150	80°C	2,040	3,250
			(20°C)	(1,700)	(2,700)
80 - 100°C	15	125	100°C	1,800	2,880
			(20°C)	(1,415)	(2,250)
100 - 120°C	10	115	120°C	1,750	2,800
			(20°C)	(1,300)	(2,080)

Order No.	S stroke	Initial force in N at 150 bar/+20°C	Initial force in lbf at 150 bar/+20°C	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
MT 24-010	10	1,700	382	65	55	0.003	0.13
MT 24-020	20			85	65	0.006	0.15
MT 24-030	30			105	75	0.008	0.17
MT 24-040	40			125	85	0.011	0.19
MT 24-050	50			145	95	0.012	0.21
MT 24-060	60			165	105	0.014	0.23
MT 24-070	70			185	115	0.017	0.25
MT 24-080	80			205	125	0.019	0.27

\* Isothermal end force at full stroke.

## Installation tool



Order No. 3021000

## Mounting possibilities



**Thread mount**  
Lock nut available  
M24x1.5 503928

## Additional mounts




FRM-19

 240

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## 2 | Overview - $2500 \leq F_{INIT} < 5000$

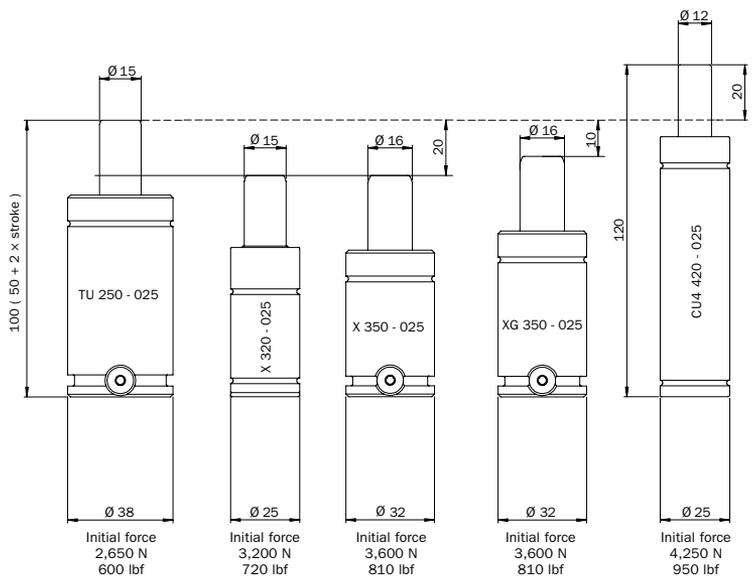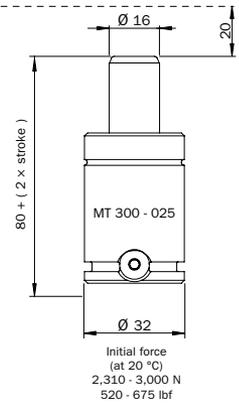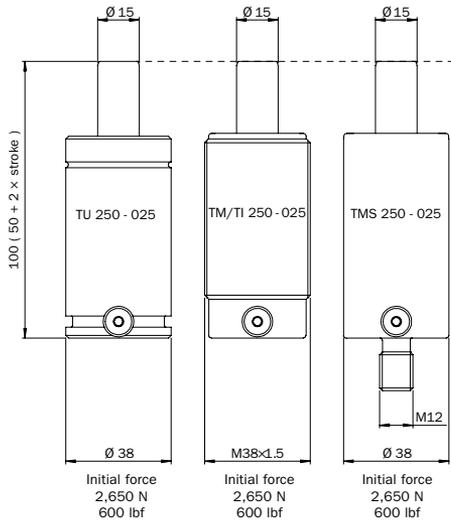

	<b>Page</b>
<b>CU4 420</b>	<b>44</b>
<b>X 320</b>	<b>46</b>
<b>X 350</b>	<b>48</b>
<b>XG 350</b>	<b>50</b>
<b>TU 250</b>	<b>52</b>
<b>TM/TI 250</b>	<b>54</b>
<b>TMS 250</b>	<b>56</b>
<b>MT 300</b>	<b>58</b>

This is the smallest member of the CU4 family. As with the rest of the CU4 springs it has a very high force compared to its outer diameter.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	Non-repairable


Automotive standard: 5937643, 5937644, 5937645, 5937646, 5937647, 5937648

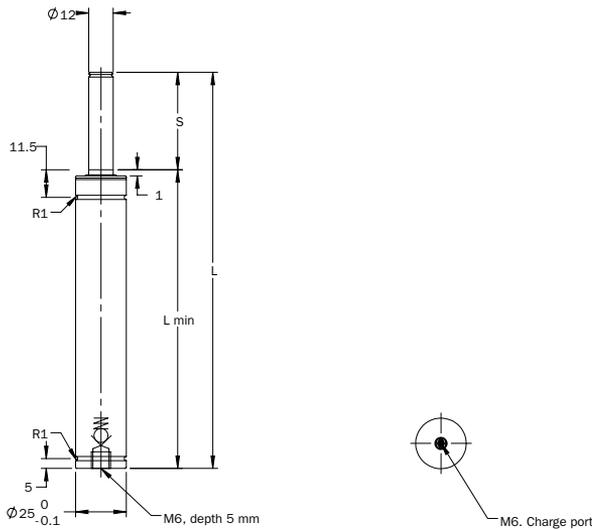

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
CU4 420-006	6		7,300		1,641	56	50	0.003	0.13
CU4 420-010	10 ■		7,300		1,416	70	60	0.005	0.15
CU4 420-016	16 ■		7,300		1,416	91	75	0.008	0.18
CU4 420-025	25 ■	4,250	7,400	955	1,439	120	95	0.011	0.22
CU4 420-032	32		7,900		1,776	140	108	0.021	0.24
CU4 420-040	40		8,000		1,800	165	125	0.026	0.27
CU4 420-050	50		8,000		1,800	195	145	0.032	0.31

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.


## Mounting possibilities

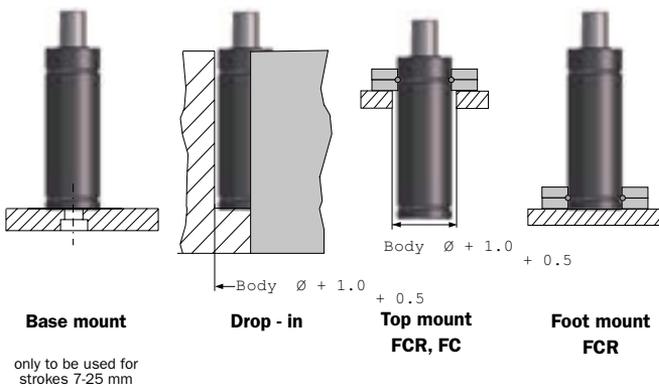

## Recommended mounts



## Additional mounts



## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


The Power Line springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. The X 320 has a bottom port for gas charging that can also be used to connect to a gas link system. The X 320 has an upper ISO Standard C-groove that together with a threaded bottom hole offers various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	Non-repairable


Automotive standard: 39D99710x, 90201407353

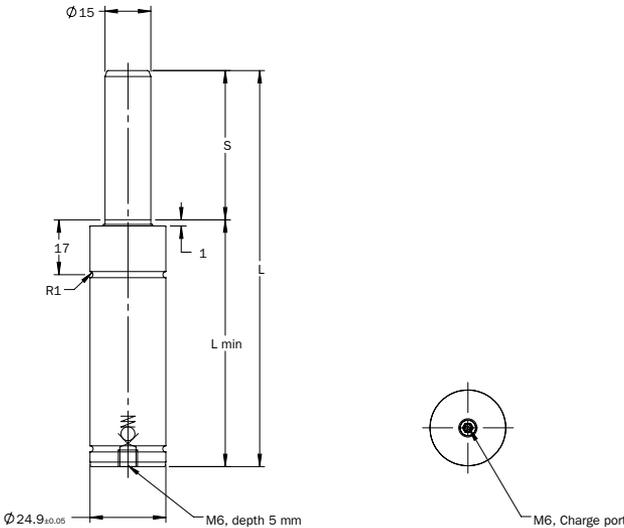

Order No.	S Stroke	Force in N at 180 bar/+20°C		Force in lbf at 180 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 320-007	7	3,200	4,800	720	1,080	44	37	0.004	0.10	
X 320-010	10		4,900		1,100	50	40	0.005	0.11	✓
X 320-015	15		5,100		1,150	60	45	0.007	0.12	✓
X 320-019	19		5,100		1,150	68	49	0.009	0.13	
X 320-025	25 ■		5,200		1,170	80	55	0.011	0.14	✓
X 320-032	32		5,300		1,190	94	62	0.014	0.15	
X 320-038	38 ■		5,300		1,190	106	68	0.017	0.16	✓
X 320-050	50 ■		5,300		1,190	130	80	0.022	0.19	✓
X 320-063	63 ■		5,300		1,190	156	93	0.028	0.21	✓
X 320-075	75		5,300		1,190	185	110	0.034	0.24	
X 320-080	80		5,300		1,190	195	115	0.036	0.25	✓
X 320-100	100		5,300		1,190	235	135	0.044	0.29	✓
X 320-125	125	5,300	1,190	285	160	0.055	0.33	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

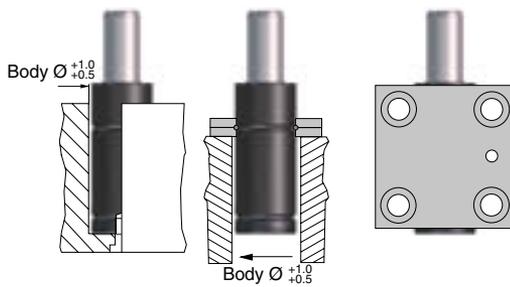

**Base mount**  
**Drop - in**  
only to be used  
for strokes 7-25

**Top mount**  
**FCR, FC**

**Body mount**  
**SM**

## Recommended mounts



FC-150

FCR-150

FCR-25



231



234



233

## Additional mounts

FCN-150

SM-150



231



254

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a gas link system. An upper C-groove, lower U-groove together with two M6 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018845


Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-3500, WDX356204-03xxDMS, GMGDS 90.25.08-3.5, 39D99xx, B2 4005 21723xx, 04584xx, 39-673-021x, 39-673-0220, 304503x, 305074x

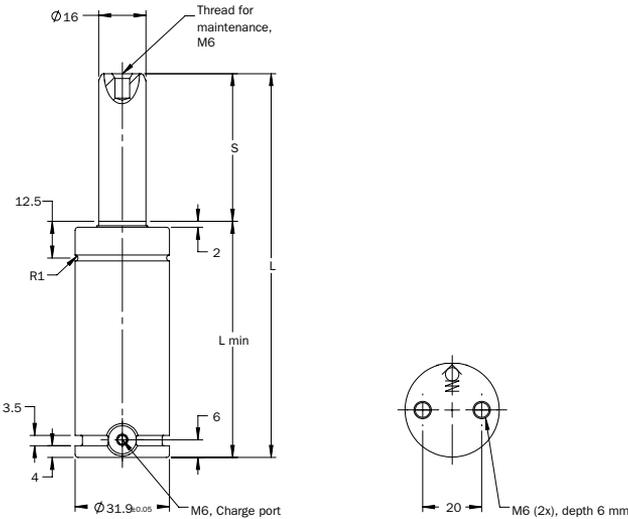

Order No.	S stroke	Force in N at 180 bar/+20°C		Force in lbf at 180 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 350-010	10	3,600	5,900	810	1,330	50	40	0.01	0.17	✓
X 350-013	13		5,200		1,190	56	43	0.01	0.18	✓
X 350-016	16		5,300		1,210	62	46	0.01	0.19	✓
X 350-019	19		5,600		1,260	68	49	0.01	0.20	
X 350-025	25 ■		5,500		1,260	80	55	0.02	0.22	✓
X 350-032	32		5,500		1,260	94	62	0.02	0.24	
X 350-038	38 ■		5,500		1,240	106	68	0.03	0.26	✓
X 350-050	50 ■		5,600		1,260	130	80	0.03	0.29	✓
X 350-063	63 ■		5,500		1,260	156	93	0.04	0.33	✓
X 350-075	75		5,500		1,260	180	105	0.05	0.37	
X 350-080	80		5,500		1,240	190	110	0.05	0.39	✓
X 350-100	100		5,500		1,240	230	130	0.06	0.45	✓
X 350-125	125	5,500	1,240	280	155	0.08	0.53	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

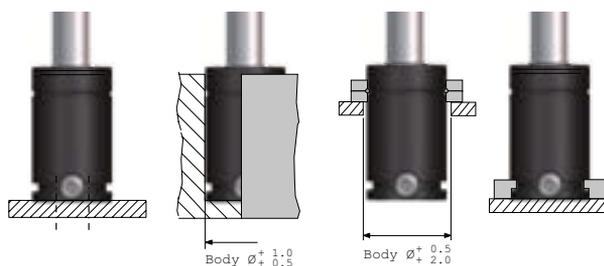


**Base mount**

**Drop - in**

**Top mount**  
FC, FCS

**Foot mount**  
FFC

## Recommended mounts

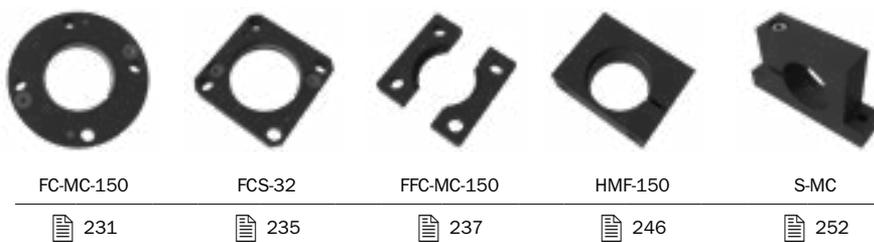

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 3,500 N up to 66,000 N and stroke lengths between 10 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two M6 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	180 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018845


Automotive standard: MES E7231 PG230-PG24D-03, M-2404-TD-1-350

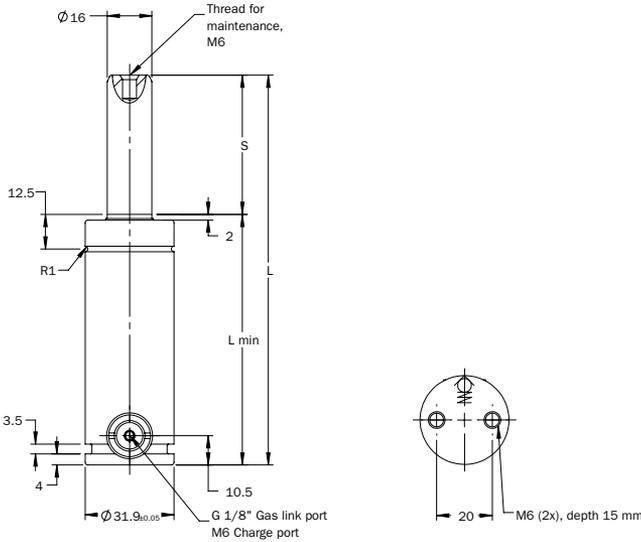

Order No.	S stroke	Force in N at 180 bar/+20°C		Force in lbf at 180 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 350-010	10	3,600	5,900	810	1,330	60	50	0.01	0.23
XG 350-013	13		5,200		1,190	66	53	0.01	0.23
XG 350-016	16		5,300		1,210	72	56	0.01	0.24
XG 350-019	19		5,600		1,260	78	59	0.01	0.25
XG 350-025	25		5,500		1,260	90	65	0.02	0.27
XG 350-032	32		5,500		1,260	104	72	0.02	0.29
XG 350-038	38 ■		5,500		1,240	116	78	0.03	0.31
XG 350-050	50 ■		5,600		1,260	140	90	0.03	0.35
XG 350-063	63 ■		5,500		1,260	166	103	0.04	0.39
XG 350-075	75		5,500		1,260	190	115	0.05	0.43
XG 350-080	80		5,500		1,240	200	120	0.05	0.44
XG 350-100	100		5,500		1,240	240	140	0.06	0.50
XG 350-125	125		5,500		1,240	290	165	0.08	0.58

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

### Mounting possibilities

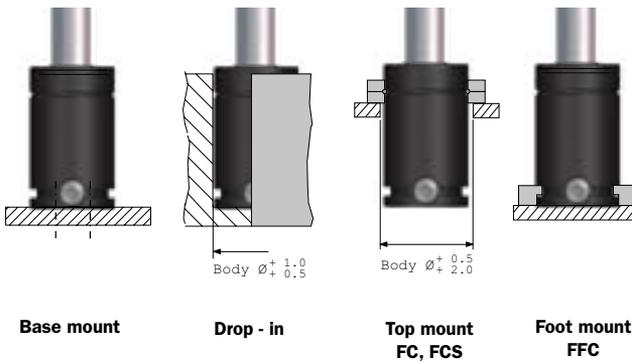

### Recommended mounts



### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The TU line constitutes our standard line of gas springs. Sizes 250 to 1000 conform to the ISO 11901 gas spring standard as well as VDI 3003.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3026638




Automotive standard: VDI 3003, ISO 11901-1-5000 WDX356203-0202DMS  
 GMGDS 90.25.00-2.5 39D878xx, B2 4005 21680xx, B2 4006 33834xx, B2 4006 21710xx, B2 4006 33834xx, 03322xx, N00135992x, N001374093, X346590500, R100287063, X346590823, 39-673-564x, 39-673-565x, N03020x, K32S0-0250-25, 304417x, M-2401-TD-01-250

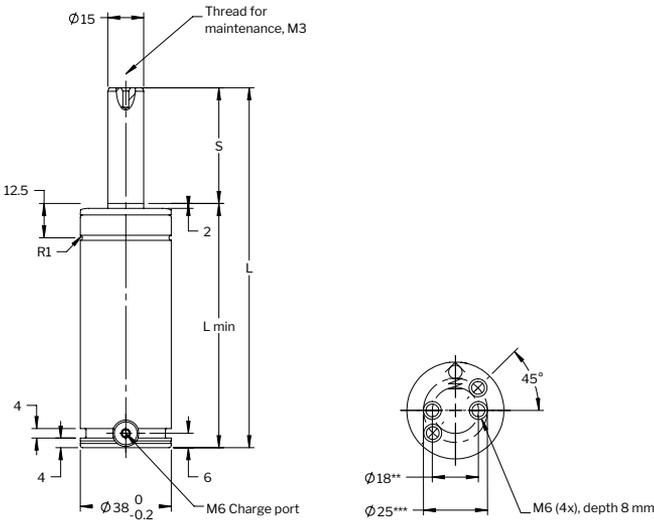

Order No.	S stroke	Force in N at 180 bar/+20°C		Force in lbf at 180 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 250-010	10	2,650	3,500	600	790	70	60	0.011	0.40	✓
TU 250-013	12.7		3,500			75.4	62.7	0.013	0.42	
TU 250-016	16		3,500			82	66	0.016	0.43	✓
TU 250-025	25 ■		3,500			100	75	0.023	0.48	✓
TU 250-038	38.1		3,500			126.2	88.1	0.032	0.54	
TU 250-050	50 ■		3,500			150	100	0.041	0.60	✓
TU 250-064	63.5		3,500			177	113.5	0.051	0.67	
TU 250-080	80 ■		3,500			210	130	0.062	0.75	✓
TU 250-100	100		3,500			250	150	0.077	0.85	✓
TU 250-125	125		3,500			300	175	0.096	0.97	✓

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

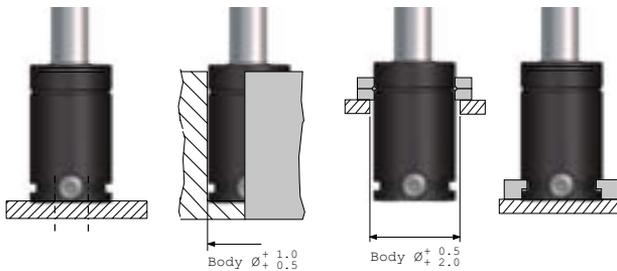

Base mount

Drop - in

Top mount  
FC, FCS

Foot mount  
FFC

## Recommended mounts



FC-250

FCS-250

FFC-250

HMF-250

S-250



## Additional mounts

FCN-250

HM-250

K-250

L-250



### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TM 250 and TI 250 are threaded cylinders with the same length as the TU 250. The TM spring has an M38 × 1.5 metric thread. The TI spring has a UNF 1½-12 inch thread.



## Basic information

For general information see "About gas springs".


Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3016873

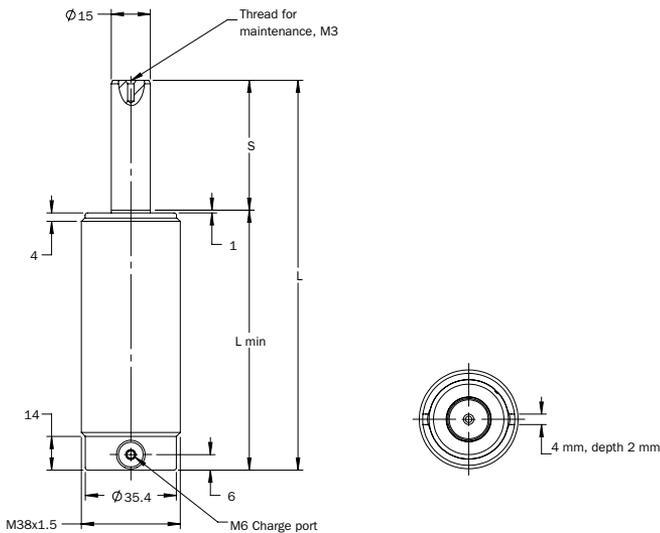

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TM/TI 250-013	12.7	2,650	3,400	600	765	75.4	62.7	0.015	0.37
TM/TI 250-025	25		3,400		765	100	75	0.024	0.42
TM/TI 250-038	38.1		3,400		765	126.2	88.1	0.033	0.47
TM/TI 250-050	50		3,400		765	150	100	0.042	0.52
TM/TI 250-064	63.5		3,500		790	177	113.5	0.052	0.57
TM/TI 250-080	80		3,500		790	210	130	0.063	0.64
TM/TI 250-100	100		3,500		790	250	150	0.078	0.72
TM/TI 250-125	125		3,500		790	300	175	0.096	0.88

\* Isothermal end force at full stroke.

### Mounting possibilities

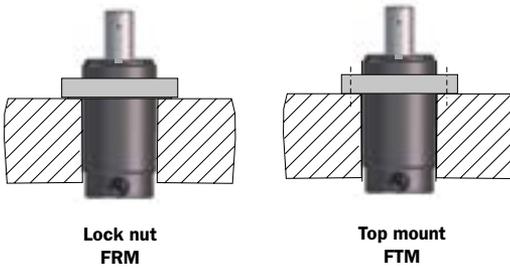

### Recommended mounts



FRM-250

 240

FTM-250

 244

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.


The TMS are springs equipped with a threaded stud for mounting. The TMS (Tube Metric Stud) has a M12 thread.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3016873

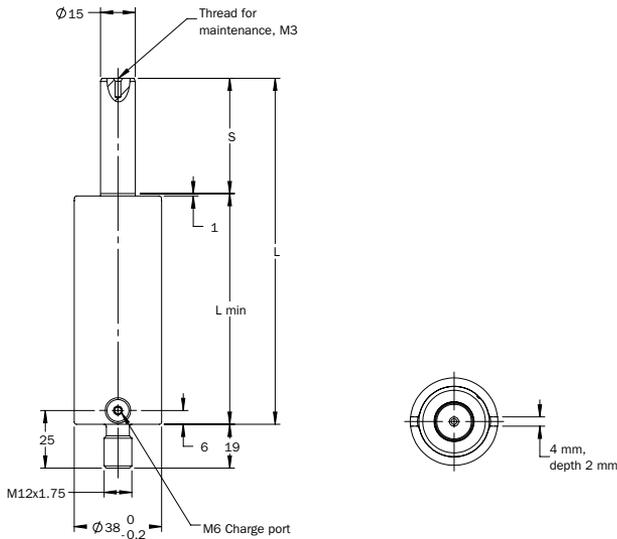

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TMS 250-013	12.7	2,650	3,400	600	765	75.4	62.7	0015	0.45
TMS 250-025	25		3,400		765	100	75	0.024	0.50
TMS 250-038	38.1		3,400		765	126.2	88.1	0.033	0.55
TMS 250-050	50		3,400		765	150	100	0.042	0.60
TMS 250-064	63.5		3,500		790	177	113.5	0.052	0.65
TMS 250-080	80		3,500		790	210	130	0.063	0.70
TMS 250-100	100		3,500		790	250	150	0.078	0.80

\* Isothermal end force at full stroke.

## Mounting possibilities



Thread mount  
M12x1.75

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

**Mould Temp gas springs have been engineered to withstand higher working temperatures, like those commonly associated with plastic molding tools. Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used at operating temperatures up to 120°C.**

## Features



- For applications up to 120°C
- Fully adjustable charge pressure
- Various mounting possibilities using our standard mounts as well as bottom threaded holes
- M6 gas ports can be connected to the special high temp version of our Micro EO24™ Hose and Tube system for remote pressure control



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	See table below
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +120°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min .....	See table below
Max piston rod velocity .....	1.0 m/s
Service life (0 to 80°C) .....	1,000,000 strokes
or .....	100,000 stroke meters
Service life (80 to 120°C) .....	500,000 strokes
or .....	50,000 stroke meters
Rod surface .....	Nitrided
Repair kit .....	3022687

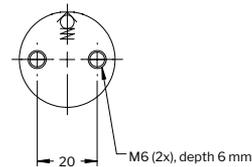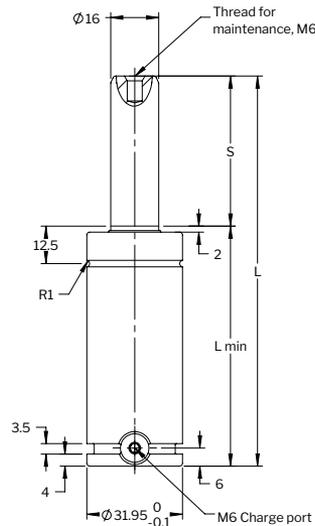


Max. working temp. interval	Max. strokes per minute (spm)	Max. charge pressure at 20°C (bar)	Force per temperature		
			Spring temp.	Initial force (N)	End force* (N)
0 - 80°C	20	150	80°C (20°C)	3,630 (3,000)	5,550 (4,600)
80 - 100°C	15	125	100°C (20°C)	3,200 (2,510)	4,900 (3,850)
100 - 120°C	10	115	120°C (20°C)	3,100 (2,310)	4,750 (3,540)

Order No.	S stroke	Initial force in N at 150 bar/+20°C	Initial force in lbf at 150 bar/+20°C	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
MT 300-010	10	3,000	675	50	40	0.01	0.17
MT 300-013	13			56	43	0.01	0.17
MT 300-016	16			62	46	0.01	0.19
MT 300-019	19			68	49	0.01	0.20
MT 300-025	25			80	55	0.02	0.21
MT 300-032	32			94	62	0.02	0.23
MT 300-038	38			106	68	0.03	0.25
MT 300-050	50			130	80	0.03	0.29
MT 300-063	63			156	93	0.04	0.33
MT 300-075	75			180	105	0.05	0.36
MT 300-080	80			190	110	0.05	0.38

\* Isothermal end force at full stroke.

### Mounting possibilities

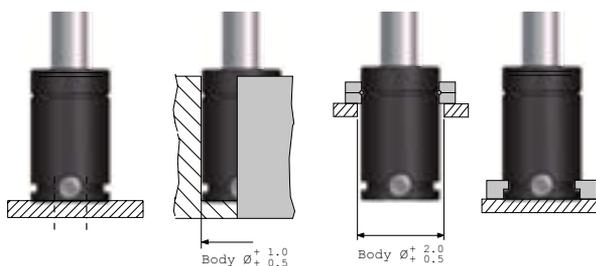

**Base mount**

**Drop - in**

**Top mount**  
**FC, FCS**

**Foot mount**  
**FFC, MC**

### Recommended mounts



FC-MC-150

231



FCS-32

235



FFC-MC-150

237



HMF-150

246





S-MC

252

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## 2 | Overview - $5000 \leq F_{INIT} < 7500$

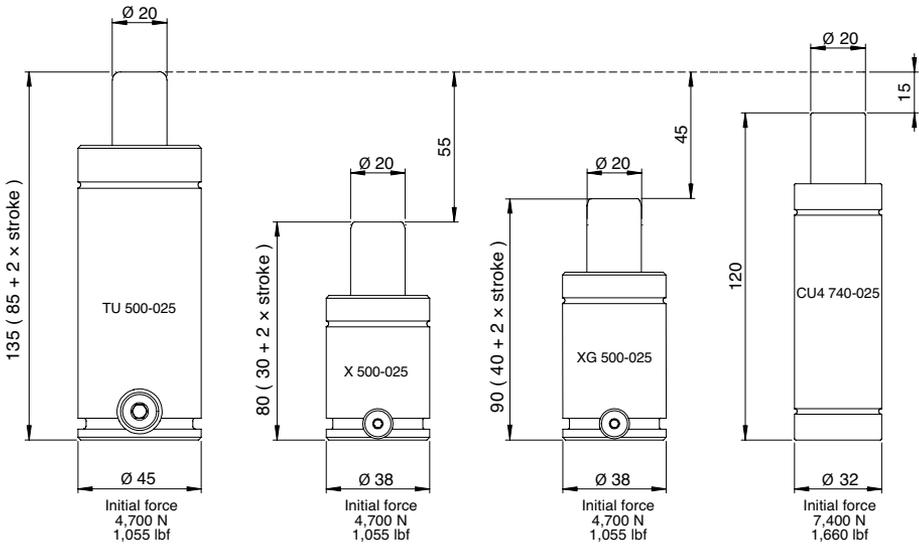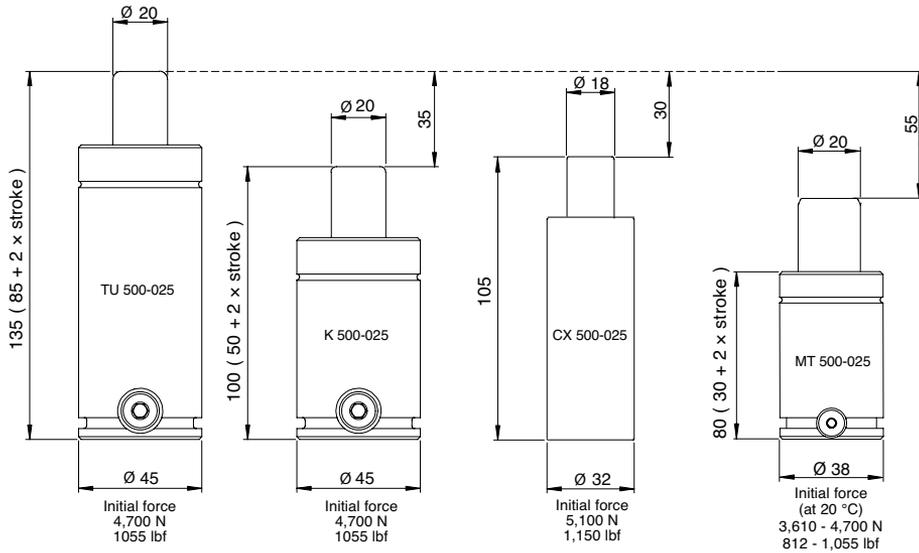

	<b>Page</b>
<b>CU4 740</b>	<b>62</b>
<b>CX 500</b>	<b>64</b>
<b>X 500</b>	<b>66</b>
<b>XG 500</b>	<b>68</b>
<b>K 500</b>	<b>70</b>
<b>TU 500</b>	<b>72</b>
<b>MT 500</b>	<b>74</b>

The CU4 gas springs are a very compact bore sealed gas springs, offering impressive force in a compact body. Springs with stroke lengths over 25 mm should always be attached to the tool, using a flange or the tapped holes in the bottom of the spring.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3025048

Automotive standard: WDX35-62-06007xxDM, 5937649. 5937650. 5937651. 5937652. 5937653.5937654. 5937655

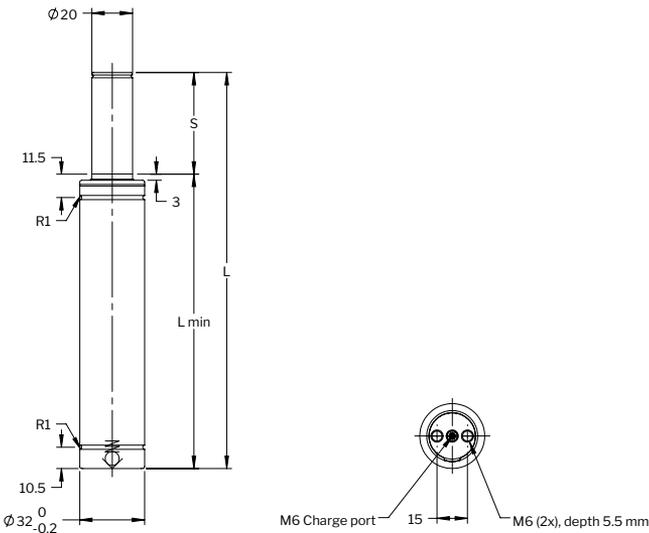


Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 740-006	6	7,400	10,000	1,660	2,200	63	57	0.012	0.20
CU4 740-010	10 ■		10,000		2,250	75	65	0.017	0.24
CU4 740-016	16 ■		11,000		2,475	93	77	0.024	0.28
CU4 740-025	25 ■		12,000		2,700	120	95	0.034	0.33
CU4 740-032	32*		12,000		2,700	140	108	0.042	0.37
CU4 740-040	40*		12,000		2,700	165	125	0.052	0.42
CU4 740-050	50*		12,000		2,700	195	145	0.063	0.48

\* Should always be attached to the tool using the tapped holes in the bottom or a flange. \*\* Isothermal end force at full stroke.  
 ■ Recommended stroke length for optimal delivery.


## Mounting possibilities



**Base mount**



**Drop-in**

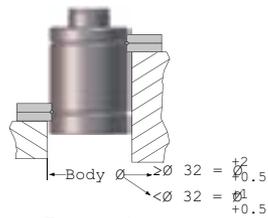

**Top mount  
FC, FCS**

## Recommended mounts



FC-MC-150

231



FCS-32

235

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.


With its unique safety and reliability features, **KALLER Compact Xtreme CX is an extremely compact and powerful piston rod sealed gas spring series. Using the CX gas spring is an excellent way to achieve more cost efficient dies due to lower die height.**

With its extremely compact build height and cylinder diameters, the CX gas spring can reach extreme initial forces, ranging from 5,100 N to 19,200 N with stroke lengths up to 80 mm. The CX gas spring series is similar to the Power Line X series and provide extreme forces comparable to the bore sealed Super Compact CU4 series. In addition, the CX gas spring can handle higher stroke frequencies (SPM) compared to similar gas springs on the market, which leads to a higher production rate.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	200 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 70-200
Max piston rod velocity .....	1.6 m/s

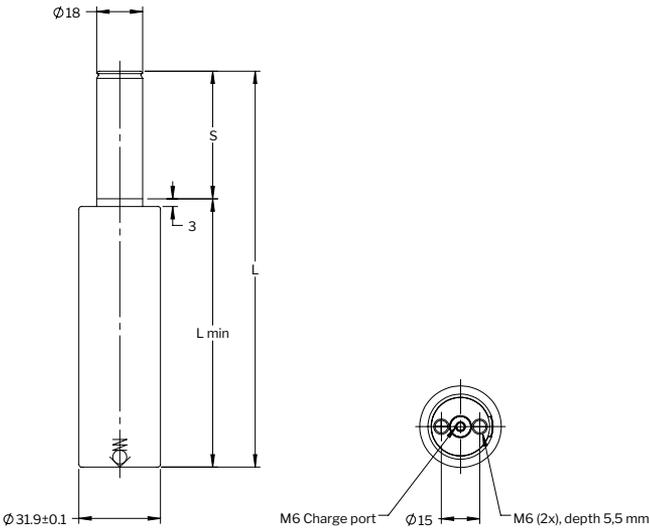


Order No.	S stroke	Force in N at 200 bar/+20°C		Force in lbf at 200 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CX 500-010	10 ■	5,100	6,600	1,150	1,490	75	65	0.01	0.27
CX 500-015	15 ■		7,100		1,610	85	70	0.02	0.29
CX 500-025	25 ■		7,900		1,780	105	80	0.02	0.33
CX 500-038	38* ■		8,700		1,960	130	92	0.03	0.37
CX 500-050	50* ■		9,100		2,040	155	105	0.04	0.42
CX 500-063	63* ■		8,800		1,990	190	127	0.05	0.50
CX 500-080	80* ■		9,200		2,060	225	145	0.06	0.56

\* For stroke lengths over 25 mm, the spring should be attached to the tool using the threaded holes in the bottom.

\*\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

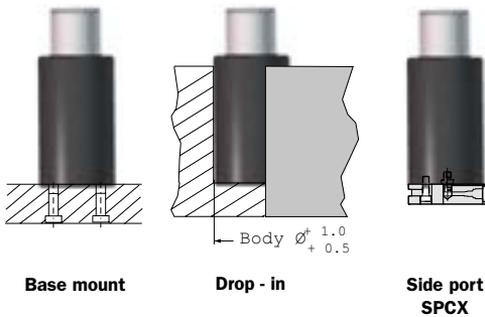

## Recommended mounts



HM-F-150

246



SPCX-500

256

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two sets of M6 threaded holes patterns allowing various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018846


Automotive standard: VDI 3003-Blatt 3 ISO 11901-3-5000 WDX356204-05xxDMS  
 GMGDS 90.25.08-5 39D997xx B2 4005 21723xx 04584xx, Z0004590xx,  
 N000491555 , Z000504472, Z000416026, 39-673-022x, 39-673-023x, 305074x

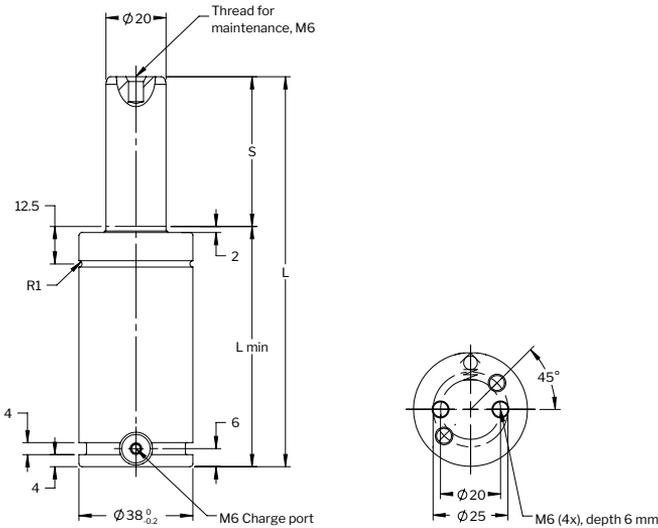

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 500-010	10	4,700	7,200	1,055	1,620	50	40	0.01	0.25	✓
X 500-013	13		7,100		1,600	56	43	0.01	0.26	✓
X 500-016	16		7,200		1,620	62	46	0.02	0.27	✓
X 500-019	19		7,400		1,660	68	49	0.02	0.29	
X 500-025	25 ■		7,300		1,640	80	55	0.03	0.31	✓
X 500-032	32		7,200		1,620	94	62	0.03	0.34	
X 500-038	38 ■		7,200		1,620	106	68	0.04	0.36	✓
X 500-050	50 ■		7,200		1,620	130	80	0.05	0.41	✓
X 500-063	63 ■		7,200		1,620	156	93	0.06	0.46	✓
X 500-075	75		7,100		1,600	180	105	0.07	0.50	
X 500-080	80		7,100		1,600	190	110	0.08	0.52	✓
X 500-100	100		7,100		1,600	230	130	0.10	0.60	✓
X 500-125	125	7,100	1,600	280	155	0.12	0.69	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

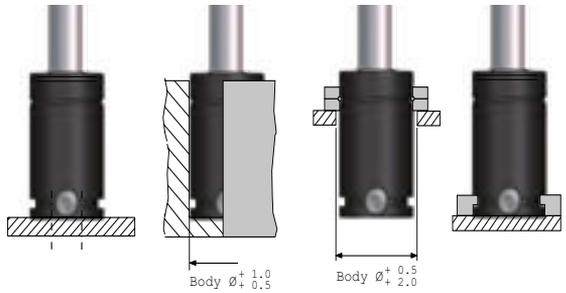

**Base mount**

**Drop - in**

**Top mount**  
**FC, FCS**

**Foot mount**  
**K, FFC**

## Recommended mounts



FC-250

FCS-250

FFC-250

HMF-250

231

235

237

246

## Additional mounts

FCN-250

K-250

L-250

231

247

248

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 3500 N up to 66000 N and stroke lengths between 10 and 125 mm. There is a side port for gas charging that also can be used to connect to a hose system. An upper C-groove, lower U-groove together with two M6 threaded holes allows for various mounting possibilities using our standard mounts.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018846


Automotive standard: MES E7231 PG230-PG24D-05, M-2404-TD-8-500

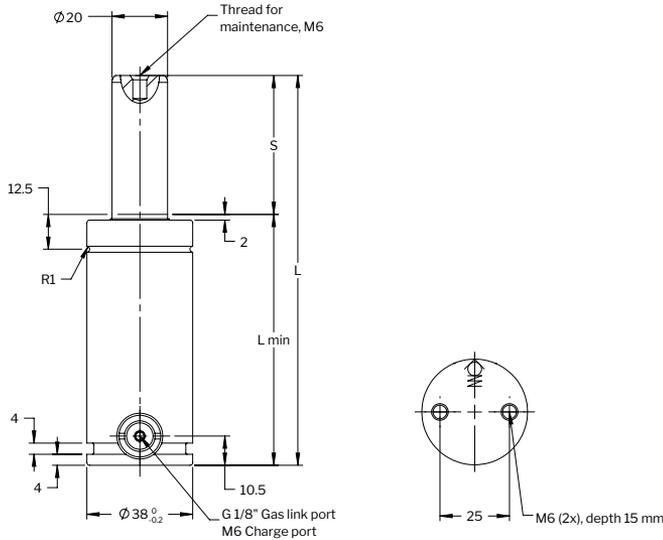

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 500-010	10	4,700	7,200	1,055	1,620	60	50	0.01	0.33
XG 500-013	13		7,100		1,600	66	53	0.01	0.34
XG 500-016	16		7,200		1,620	72	56	0.02	0.36
XG 500-019	19		7,400		1,660	78	59	0.02	0.37
XG 500-025	25		7,300		1,640	90	65	0.03	0.39
XG 500-032	32		7,200		1,620	104	72	0.03	0.42
XG 500-038	38 ■		7,200		1,620	116	78	0.04	0.44
XG 500-050	50 ■		7,200		1,620	140	90	0.05	0.49
XG 500-063	63 ■		7,200		1,620	166	103	0.06	0.54
XG 500-075	75		7,100		1,600	190	115	0.07	0.58
XG 500-080	80		7,100		1,600	200	120	0.08	0.60
XG 500-100	100		7,100		1,600	240	140	0.10	0.68
XG 500-125	125		7,100		1,600	290	165	0.12	0.77

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

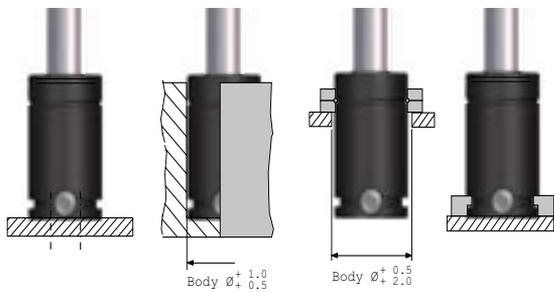

Base mount

Drop - in

Top mount  
FC, FCS

Foot mount  
K, FFC

## Recommended mounts



FC-250

FCS-250

FFC-250

HMF-250

231

235

237

246

## Additional mounts

FCN-250

K-250

L-250

231

247

248

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

This is a short height spring with an initial force of 4,700 N. This spring is 35 mm shorter than the TU 500. Mounting options are the same as for the TU 500.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-80
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3017230-0500


Automotive standard: R100278271, X346590506, R100288377, R100288378

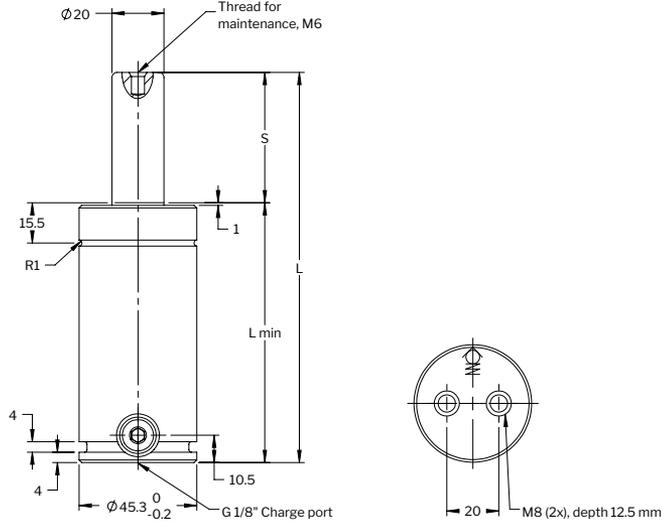

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
K 500-006	6	4,700	5,600	1,055	1,260	62	56	0.02	0.50
K 500-013	12.7		5,900		1,330	75.4	62.7	0.03	0.54
K 500-019	19		6,100		1,370	88.1	69.05	0.04	0.59
K 500-025	25		6,100		1,370	100	75	0.04	0.62
K 500-038	38.1		6,200		1,390	126.2	88.1	0.06	0.71
K 500-050	50		6,300		1,420	150	100	0.07	0.78
K 500-064	63.5		6,300		1,420	177	113.5	0.09	0.88
K 500-080	80		6,600		1,480	210	130	0.11	0.98
K 500-100	100		6,600		1,480	250	150	0.12	1.12
K 500-125	125		6,600		1,480	300	175	0.15	1.28

\* Isothermal end force at full stroke.

### Mounting possibilities

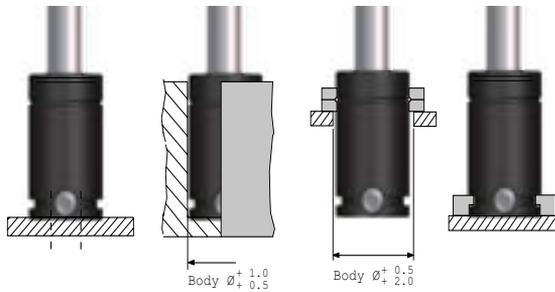

**Base mount**

**Drop - in**

**Top mount**  
**FC, FCS**

**Foot mount**  
**K, FFC**

### Recommended mounts



FC-500

FCS-500

FFC-500

HMF-500

MP-500

231

235

237

246

249

### Additional mounts

FCSC-500

K-500

L-500

236

247

248

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The TU line constitutes our standard line of gas springs. Sizes 250 to 1000 conform to the ISO 11901 gas spring standard.




## Basic information

For general information see "About gas springs".

Pressure medium ..... Nitrogen  
 Max. charging pressure (at 20°C) ..... 150 bar  
 Min. charging pressure (at 20°C) ..... 25 bar  
 Operating temperature ..... 0 to +80°C  
 Force increase by temperature ..... 0.3%/°C  
 Recommended max strokes/min (at 20°C) ..... ~ 40-80  
 Max piston rod velocity ..... 1.6 m/s  
 Rod surface ..... Nitrided  
 Tube surface ..... Black oxide  
 Repair kit ..... 2026637-0500


Automotive standard: VDI 3003, ISO 11901-1-5000, GMGDS 90.25.00-5, 39D878xx, B2 4006 21710xx, B2 4005 21680xx, B2 4006 2171243, 03322xx, X34659033x, Z000307844, X34659033x, Z000234960, X34659033x, Z000287855, N000539337, X346590829, R10003612x, 39-673-500x, 39-673-501x, MES E7231 PG230- PG23D-05, K32S0-0500, 304417x, 304418x, SD116322-500, M-2401-TD-06-500

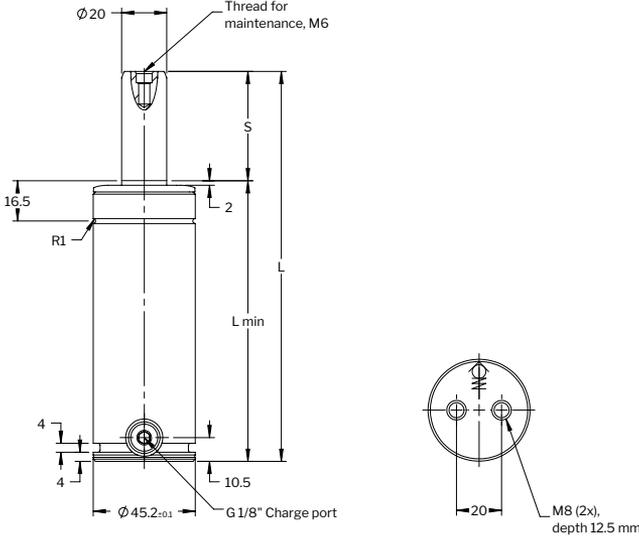

Order No.	S stroke	Force in N at 180 bar/+20°C		Force in lbf at 180 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 500-010	10	4,700	6,000	1,055	1,350	105	95	0.023	0.93	
TU 500-013	12.7		6,100		1,370	110.4	97.7	0.025	0.95	
TU 500-025	25 ■		6,400		1,440	135	110	0.038	1.04	√
TU 500-038	38.1		6,500		1,460	161.2	123.1	0.051	1.13	
TU 500-050	50 ■		6,600		1,480	185	135	0.063	1.21	√
TU 500-064	63.5		6,600		1,480	212	148.5	0.077	1.31	
TU 500-080	80 ■		6,700		1,510	245	165	0.093	1.43	√
TU 500-100	100		6,700		1,510	285	185	0.114	1.57	√
TU 500-125	125		6,700		1,510	335	210	0.139	1.74	√
TU 500-160	160 ■		6,700		1,510	405	245	0.175	1.99	√

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

### Mounting possibilities

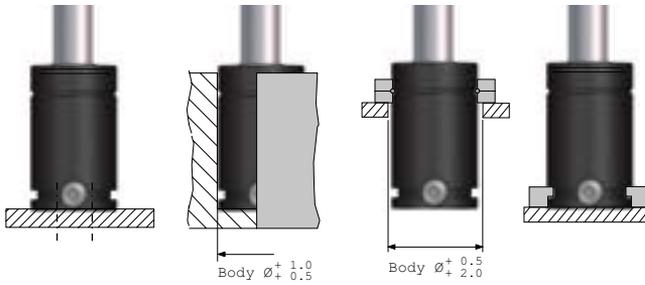

Base mount

Drop - in

Top mount  
FC, FCS

Foot mount  
FFC

### Recommended mounts



FC-500

FCS-500

FFC-500

HMF-500

MP-500

S-500

231

235

237

246

249

252

### Additional mounts

FCSC-500

K-500

L-500

NMP-750

236

247

248

250

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

**Mould Temp gas springs have been engineered to withstand higher working temperatures, like those commonly associated with plastic moulding tools. Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used at operating temperatures up to 120°C.**



## Features


- For applications up to 120°C
- Fully adjustable charge pressure
- Various mounting possibilities using our standard mounts as well as bottom threaded holes
- M6 gas ports can be connected to the special high temp version of our Micro EO24™ Hose and Tube system for remote pressure control.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	See table below
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +120°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min .....	See table below
Max piston rod velocity .....	1.0 m/s
Service life (0 to 80°C) .....	1,000,000 strokes
or .....	100,000 stroke meters
Service life (80 to 120°C) .....	500,000 strokes
or .....	50,000 stroke meters
Rod surface .....	Nitrided
Repair kit .....	3022687

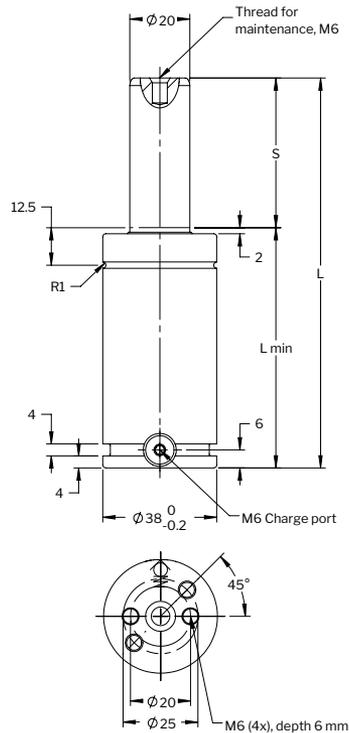


Max. working temp. interval	Max. strokes per minute (spm)	Max. charge pressure at 20°C (bar)	Force per temperature		
			Spring temp.	Initial force (N)	End force* (N)
0 - 80°C	20	150	80°C (20°C)	5,680 (4,700)	8,690 (7,200)
80 - 100°C	15	125	100°C (20°C)	5,000 (3,930)	7,650 (6,010)
100 - 120°C	10	115	120°C (20°C)	4,850 (3,610)	7,420 (5,520)


Order No.	S stroke	Initial force in N at 150 bar/+20°C	Initial force in lbf at 150 bar/+20°C	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
MT 500-010	10	4,700	1,055	50	40	0.01	0.25
MT 500-013	13			56	43	0.01	0.26
MT 500-016	16			62	46	0.02	0.27
MT 500-019	19			68	49	0.02	0.28
MT 500-025	25			80	55	0.03	0.31
MT 500-032	32			94	62	0.03	0.34
MT 500-038	38			106	68	0.04	0.36
MT 500-050	50			130	80	0.05	0.40
MT 500-063	63			156	93	0.06	0.45
MT 500-075	75			180	105	0.07	0.50
MT 500-080	80			190	110	0.08	0.52

\* Isothermal end force at full stroke.


### Mounting possibilities

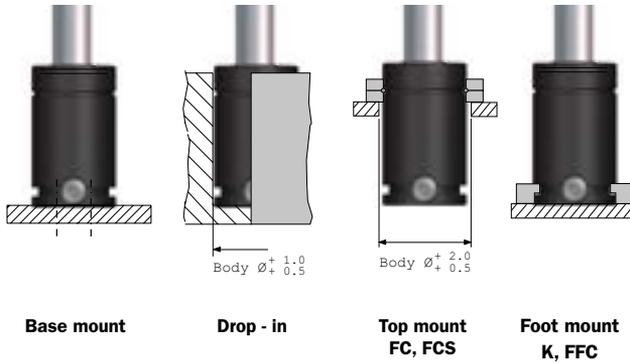

### Recommended mounts

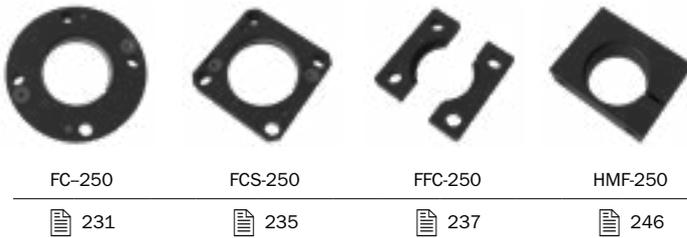




### Additional mounts



### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## 2 | Overview - $7500 \leq F_{INIT} < 10000$

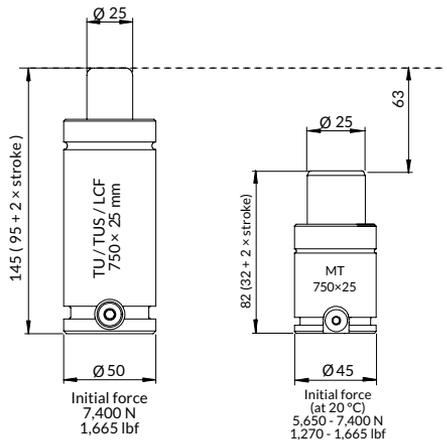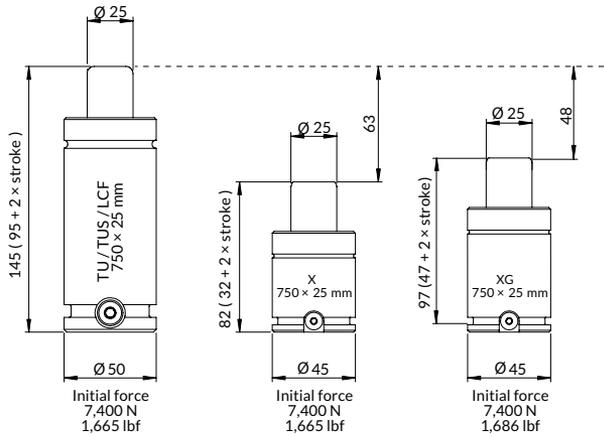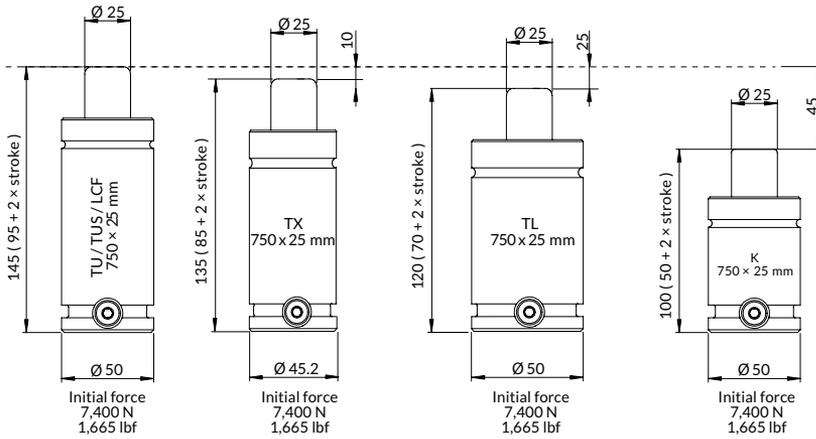

	<b>Page</b>
<b>X 750</b>	<b>78</b>
<b>XF 750</b>	<b>80</b>
<b>XG 750</b>	<b>82</b>
<b>TX 750</b>	<b>84</b>
<b>TL 750</b>	<b>86</b>
<b>K 750</b>	<b>88</b>
<b>TU 750</b>	<b>90</b>
<b>TUS 750</b>	<b>92</b>
<b>LCF 750</b>	<b>94</b>
<b>SPC 750</b>	<b>96</b>
<b>MT 750</b>	<b>98</b>

**The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.**


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two M8 threaded holes allows for various mounting possibilities using our standard mounts.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019903


Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-7500, WDX356204-07xxDMS, GMGDS 90.25.08-7.5, 39D997xx, B2 4005 21749xx, 04585xx, N000491556, Z0004590xx

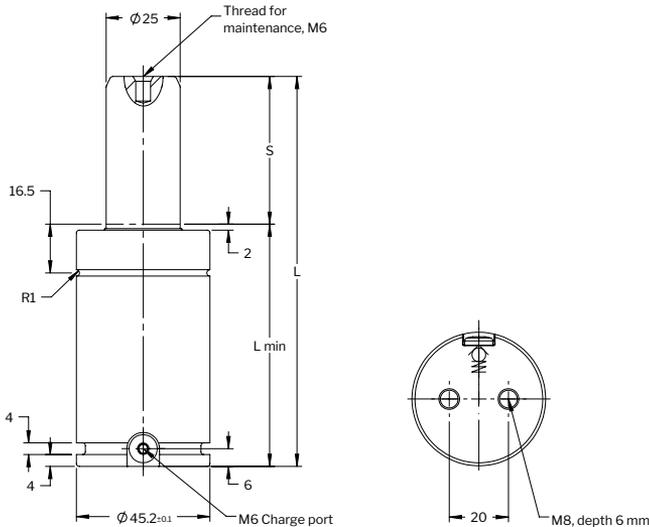

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 750-010	10	7,400	12,100	1,665	2,720	52	42	0.02	0.37	
X 750-013	13		12,100		2,720	58	45	0.02	0.39	✓
X 750-016	16		12,100		2,720	64	48	0.03	0.41	
X 750-019	19		11,700		2,630	70	51	0.03	0.41	
X 750-025	25 ■		11,800		2,650	82	57	0.04	0.45	✓
X 750-032	32		11,800		2,650	96	64	0.05	0.50	
X 750-038	38 ■		11,800		2,650	108	70	0.05	0.53	✓
X 750-050	50 ■		11,800		2,650	132	82	0.07	0.61	✓
X 750-063	63 ■		11,800		2,650	158	95	0.09	0.69	✓
X 750-075	75		11,900		2,675	182	107	0.10	0.77	
X 750-080	80		11,900		2,675	192	112	0.11	0.80	✓
X 750-100	100		11,900		2,675	232	132	0.13	0.93	✓
X 750-125	125	11,900	2,675	282	157	0.17	1.09	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

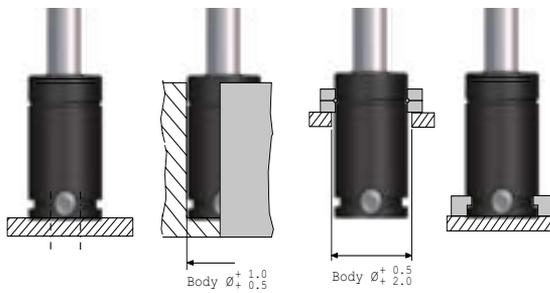

Base mount

Drop - in

Top mount  
FC, FCS

Foot mount  
K, FFC

## Recommended mounts



FC-500

FCS-500

FFC-500

HMF-500



## Additional mounts

FCSC-500

K-500

L-500

NMP-750



## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

**The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.**


The Power Line XF series conforms with the FCA Fiat-Chrysler standard 075.90.60. There is a G 1/8" side port for charging or to connect to a gas link system. The upper ISO Standard C-groove and the threaded bottom hole offer various mounting possibilities using our standard mounts.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019903


Automotive standard: GMGDS 90.25.08-7.5G, 39-673-023x, 39-673-024x

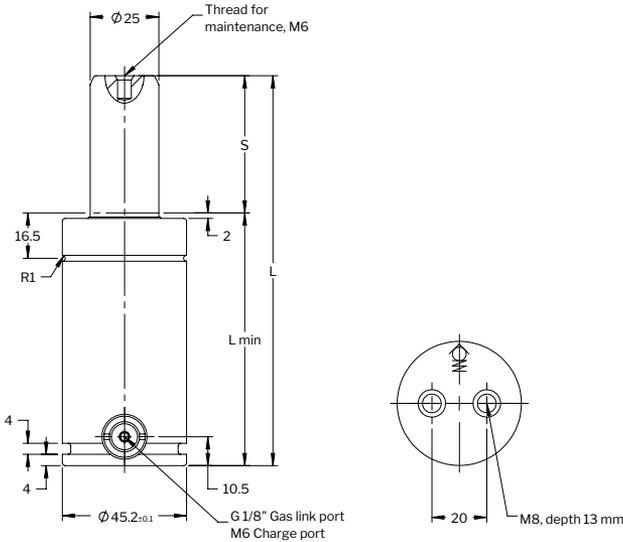

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XF 750-010	10	7,400	12,100	1,665	2,720	62	52	0.02	0.47
XF 750-013	13		12,100		2,720	68	55	0.02	0.49
XF 750-016	16		12,100		2,720	74	52	0.03	0.51
XF 750-019	19		11,700		2,630	80	61	0.03	0.51
XF 750-025	25		11,800		2,650	92	67	0.04	0.55
XF 750-032	32		11,800		2,650	106	74	0.05	0.60
XF 750-038	38		11,800		2,650	118	80	0.05	0.64
XF 750-050	50		11,800		2,650	142	92	0.07	0.71
XF 750-063	63		11,800		2,650	168	105	0.09	0.79
XF 750-075	75		11,900		2,675	192	117	0.10	0.87
XF 750-080	80		11,900		2,675	202	122	0.11	0.90
XF 750-100	100		11,900		2,675	242	142	0.13	1.03
XF 750-125	125	11,900	2,675	292	167	0.17	1.19		

\* Isothermal end force at full stroke.

## Mounting possibilities

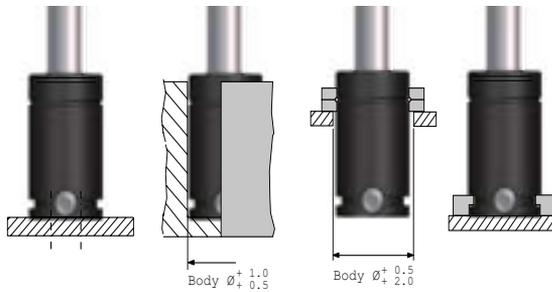

**Base mount**

**Drop - in**

**Top mount**  
**FC, FCS**

**Foot mount**  
**K, FFC**

## Recommended mounts



FC-500

FCS-500

FFC-500

HMF-500



231



235



237



246

## Additional mounts

FCSC-500

K-500

L-500

NMP-750



236



247



248



250

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 3,500 N up to 66,000 N and stroke lengths between 10 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two M8 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019903

Automotive standard: R90344047x, MES E7231 PG230-PG24D-07, K32R0-0750-050, M-2404-TD-15-750

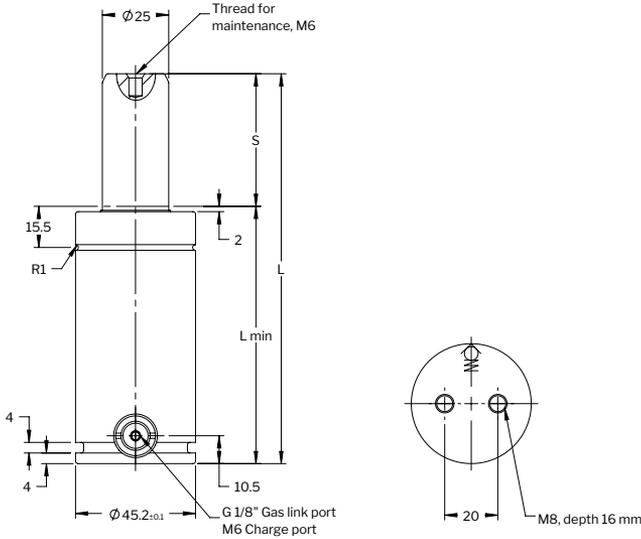


Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 750-010	10	7,400	12,100	1,665	2,720	67	57	0.02	0.55
XG 750-013	13		12,100		2,720	73	60	0.02	0.55
XG 750-016	16		12,100		2,720	79	63	0.03	0.57
XG 750-019	19		11,700		2,630	85	66	0.03	0.58
XG 750-025	25		11,800		2,650	97	72	0.04	0.62
XG 750-032	32		11,800		2,650	111	79	0.05	0.66
XG 750-038	38 ■		11,800		2,650	123	85	0.05	0.70
XG 750-050	50 ■		11,800		2,650	147	97	0.07	0.78
XG 750-063	63 ■		11,800		2,650	173	110	0.09	0.86
XG 750-075	75		11,900		2,675	197	122	0.10	0.93
XG 750-080	80		11,900		2,675	207	127	0.11	0.97
XG 750-100	100		11,900		2,675	247	147	0.13	1.09
XG 750-125	125		11,900		2,675	297	172	0.17	1.25

\* Isothermal end force at full stroke.


## Installation tool




## Mounting possibilities

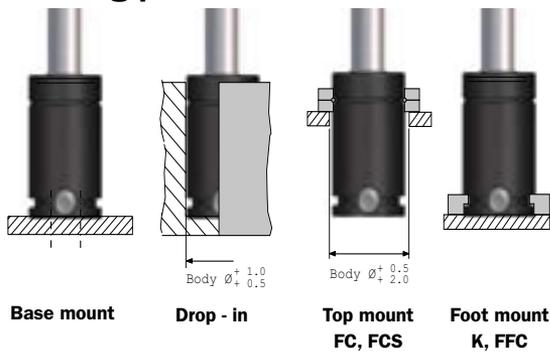

## Recommended mounts

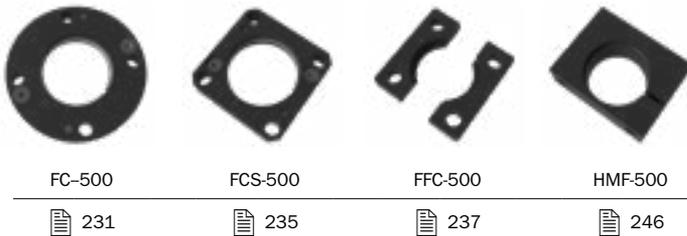

## Additional mounts



### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line – Heavy Duty Series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths between 13 and 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3026200


Automotive standard: GMGDS 90.25.05-05, ISO 11901-4-7500

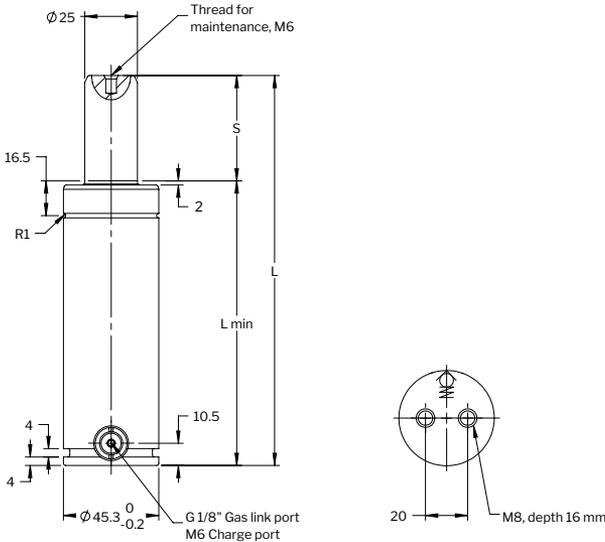


Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 750-013	13	7,400	12,000	1,665	2,700	111	98	0.04	0.85	
TX 750-025	25		12,000		2,700	135	110	0.06	0.93	✓
TX 750-038	38		12,000		2,700	161	123	0.07	1.01	
TX 750-050	50		12,000		2,700	185	135	0.09	1.09	✓
TX 750-063	63		12,000		2,700	211	148	0.11	1.17	
TX 750-075	75		12,000		2,700	235	160	0.12	1.25	
TX 750-080	80		12,000		2,700	245	165	0.13	1.28	✓
TX 750-100	100		12,000		2,700	285	185	0.15	1.41	✓
TX 750-125	125		12,100		2,720	335	210	0.19	1.56	✓
TX 750-150	150 ■		12,100		2,720	385	235	0.22	1.72	
TX 750-160	160 ■		12,100		2,720	405	245	0.23	1.79	✓
TX 750-175	175 ■		12,000		2,720	435	260	0.25	1.88	
TX 750-200	200 ■	12,100	2,720	485	285	0.28	2.04	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

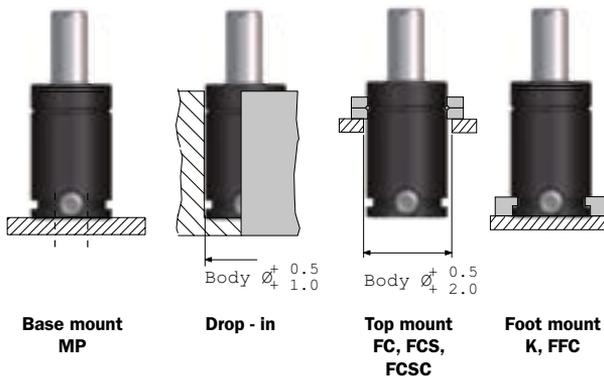

## Recommended mounts

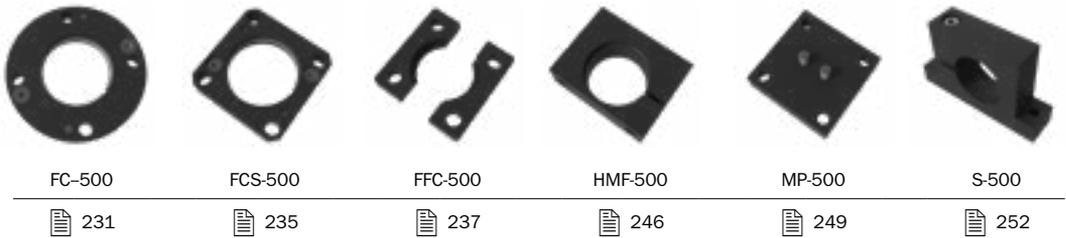

## Additional mounts

FCSC-500	K-500	L-500	NMP-750
236	247	248	250

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.


The TL series ranges from model sizes 750 to 7,500, with similar features and technology as the TU series.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3024118

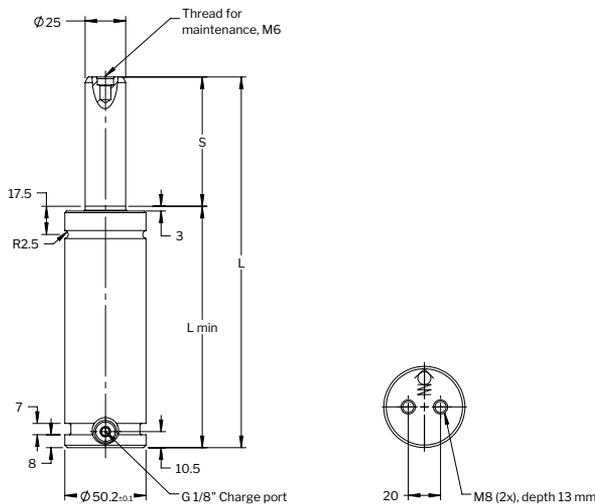

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TL 750-013	12.5	7,400	11,400	1,660	2,560	95	82.5	0.03	0.97
TL 750-025	25		11,700		2,630	120	95	0.04	1.08
TL 750-038	37.5		11,800		2,650	145	107.5	0.06	1.20
TL 750-050	50		11,900		2,670	170	120	0.08	1.32
TL 750-063	62.5		11,900		2,670	195	132.5	0.09	1.42
TL 750-075	75		11,900		2,675	220	145	0.11	1.53
TL 750-080	80		11,900		2,670	230	150	0.11	1.58
TL 750-088	87.5		11,900		2,670	245	157.5	0.11	1.65
TL 750-100	100		11,900		2,670	270	170	0.14	1.77
TL 750-113	112.5		12,000		2,700	295	182.5	0.15	1.89
TL 750-125	125		12,000		2,700	320	195	0.15	2.01
TL 750-138	137.5		12,000		2,700	345	207.5	0.17	2.13
TL 750-150	150		12,000		2,700	370	220	0.19	2.25
TL 750-160	160		12,000		2,700	390	230	0.20	2.34
TL 750-175	175		12,000		2,700	420	245	0.23	2.48
TL 750-200	200		12,000		2,700	470	270	0.26	2.72
TL 750-225	225	12,000	2,700	520	295	0.30	2.96		
TL 750-250	250	12,000	2,700	570	320	0.33	3.19		

\* Isothermal end force at full stroke.

### Mounting possibilities



**Base mount**  
MP



Body Ø  $+0.5$   
 $+1.0$

**Drop - in**




Body Ø  $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS,  
FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

### Recommended mounts



FC-750

231



FCS-750

235




FFC-750

237



HMF-750

246



MP-750

249



S-750

252

### Additional mounts

FAC-750

230

FCSC-750

236

FFL-750

238

FSL-750

241

FSS-750

243

HM-750

245

K-750

247

L-750

248

NMP-1000

250

RM-750

251

SA-750

253

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## This is a short height hoseable spring with an initial force of 7,400 N.

The K 750 has a total length of 50 mm + (2 × stroke). This spring is 45 mm shorter than the TU 750. Mounting options are the same as for the TU 750.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided tube
Tube surface .....	Black oxide
Repair kit .....	3017230-0750

Automotive standard: R100278277, R100288380, R100288377, R100288378

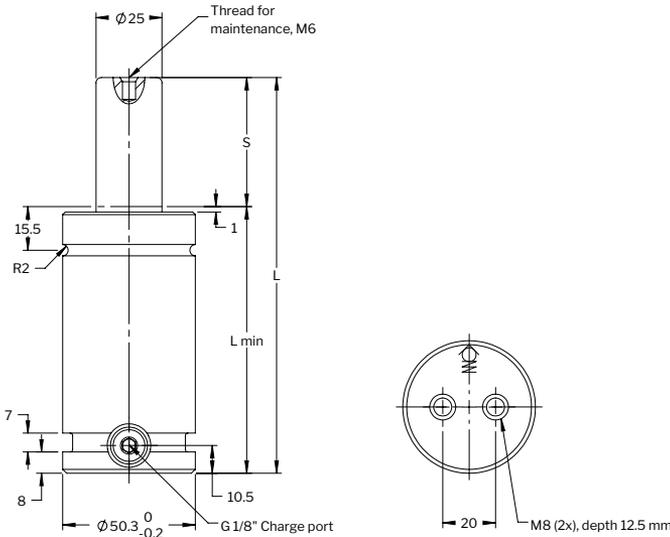

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
K 750-006	6	7,400	15,000	1,665	3,370	62	56	0.01	0.68
K 750-013	12.7		13,000		2,920	75.4	62.7	0.02	0.73
K 750-019	19		12,000		2,700	88.1	69.05	0.03	0.80
K 750-025	25		11,000		2,470	100	75	0.04	0.82
K 750-038	38.1		11,000		2,470	126.2	88.1	0.06	0.92
K 750-050	50		11,000		2,470	150	100	0.08	1.06
K 750-064	63.5		11,000		2,470	177	113.5	0.10	1.12
K 750-080	80		11,000		2,470	210	130	0.12	1.26
K 750-100	100		11,000		2,470	250	150	0.15	1.39
K 750-125	125		11,000		2,470	300	175	0.19	1.57

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP




Body  $\varnothing$   $\begin{matrix} +0.5 \\ +1.0 \end{matrix}$   
**Drop - in**



Body  $\varnothing$   $\begin{matrix} +0.5 \\ +2.0 \end{matrix}$   
**Top mount**  
FC, FCS,  
FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S

## Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

## Additional mounts

FCSC-750

236

FFL-750

238

FSS-750

243

K-750

247

L-750

248

RM-750

251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The standard line of gas springs is the TU line. Sizes 250 to 10 000 correspond to the ISO 11901 standard for gas springs.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019817

Automotive standard: ISO 11901-1-7500, WDX356203-07xxDMS, GMGDS 90.25.00-7.5, 39D878xx, B2 4006 21710xx, B2 4006 32521xx, B2 4006 32841xx, B2 4006 0996826, B2 4006 3273512, B2 4006 3344894, 03322xx, X34659033x, Z000304414, X346590260, X346590253, R10003620x, X3465906xx, R100036210, 39-673-510x, 39-673-511x, 39-673-512x, 39-673-5130, N03070x, N03071x, N030720, MES E7231 PG230-PG23D-07, K3250-0750, 304418x, 997594x, 997595x, SD116322-750, M-2401-TD-1-750

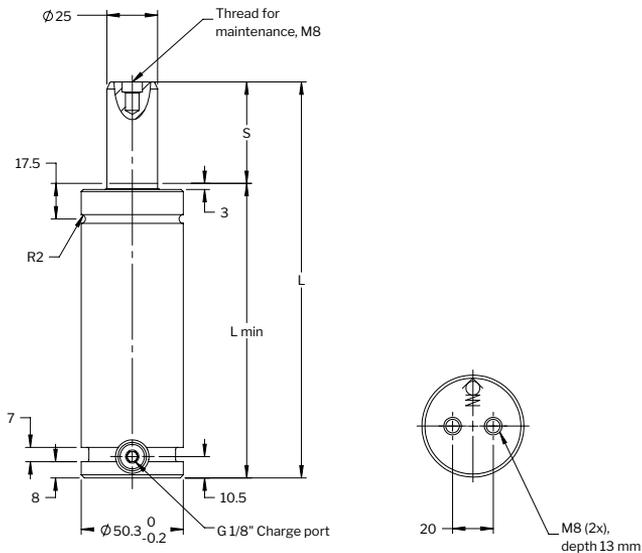

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 750-013	12.7	7,400	12,000	1,665	2,700	120.4	107.7	0.03	1.33	√
TU 750-025	25		12,000		2,700	145	120	0.04	1.44	
TU 750-038	38.1		12,000		2,700	171.2	133.1	0.06	1.57	√
TU 750-050	50		12,000		2,700	195	145	0.07	1.68	
TU 750-064	63.5		12,000		2,700	222	158.5	0.09	1.78	√
TU 750-080	80		12,000		2,700	255	175	0.11	1.94	
TU 750-100	100		12,000		2,700	295	195	0.14	2.13	√
TU 750-125	125		12,100		2,720	345	220	0.17	2.37	
TU 750-160	160		12,100		2,720	415	255	0.21	2.70	√
TU 750-175	175		12,100		2,720	445	270	0.23	2.84	
TU 750-200	200		12,100		2,720	495	295	0.26	3.08	√
TU 750-225	225		12,100		2,720	545	320	0.29	3.32	
TU 750-250	250	12,100	2,720	595	345	0.33	3.55	√		
TU 750-300	300	12,100	2,720	695	395	0.39	4.03			

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS,  
FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

## Additional mounts

FAC-750

230

FCSC-750

236

FFL-750

238

FSL-750

241

FSS-750

243

HM-750

245

K-750

247

L-750

248

NMP-1000

250

RM-750

251

SA-750

253

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The TUS High Speed gas springs have been engineered to withstand press stroke speeds to a maximum of 2 m/s, which meets the safety requirements from the French automotive manufacturer Renault.


These gas springs are available in sizes from 750 to 7,500 and dimensions that conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	2.0 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019277

Automotive standard: R903636001, R903636002, R903636003, R903636004, R903636005, R903636006

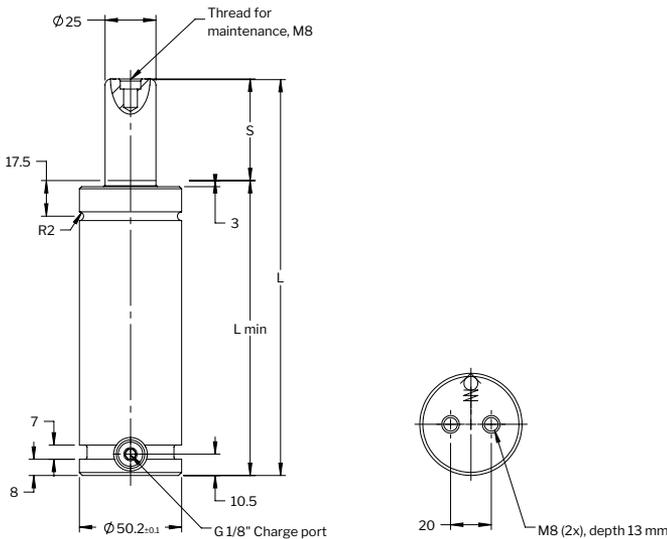

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TUS 750-025	25	7,400	12,000	1,665	2,700	145	120	0.04	1.44
TUS 750-038	38.1		12,000		2,700	171.2	133.1	0.06	1.57
TUS 750-050	50		12,000		2,700	195	145	0.07	1.68
TUS 750-064	63.5		12,000		2,700	222	158.5	0.09	1.78
TUS 750-080	80		12,000		2,700	255	175	0.11	1.94
TUS 750-100	100		12,000		2,700	295	195	0.14	2.13
TUS 750-125	125		12,100		2,720	345	220	0.17	2.37
TUS 750-160	160		12,100		2,720	415	255	0.21	2.70
TUS 750-200	200		12,100		2,720	495	295	0.26	3.08
TUS 750-250	250		12,100		2,720	595	345	0.33	3.55
TUS 750-300	300	12,100	2,720	695	395	0.39	4.03		

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS,  
FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-750



231



FCS-750



235



FFC-750



237



HMF-750



246



MP-750



249



S-750



252

## Additional mounts

FAC-750



230

FFL-750



238

FSL-750



241

FSS-750



243

HM-750



245

K-750



247

L-750



248

NMP-1000



250

RM-750



251

SA-750



253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**Low Contact Force (LCF) gas springs are designed to reduce excessive shock loads, high noise levels and extreme pad bounce, all factors that lead to high press maintenance costs and noise pollution.**






## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	70 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
*Repair kit.....	3019377



**Force vs Stroke for LCF 750 Springs**

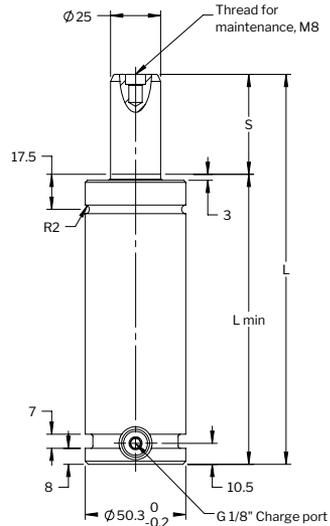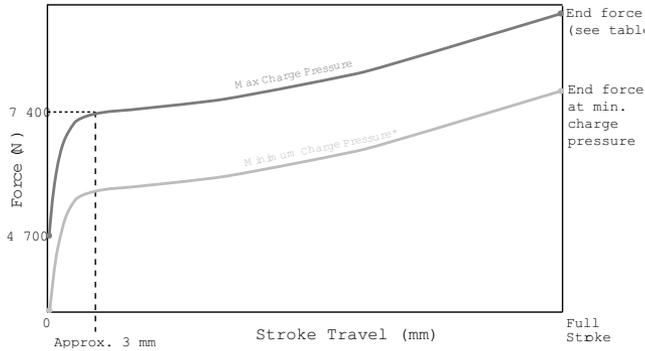

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
LCF 750-013	12.7	7,400		1,665	2,700	120.4	107.7	0.03	1.30
LCF 750-025	25					145	120	0.04	1.45
LCF 750-038	38.1					171.2	133.1	0.06	1.50
LCF 750-050	50					195	145	0.07	1.70
LCF 750-064	63.5					222	158.5	0.09	1.75
LCF 750-080	80					255	175	0.11	1.95
LCF 750-100	100	12,100		1,665	2,725	295	195	0.14	2.15
LCF 750-125	125					345	220	0.17	2.40
LCF 750-160	160					415	255	0.21	2.70
LCF 750-200	200					495	295	0.26	3.10
LCF 750-250	250					595	345	0.33	3.60
LCF 750-300	300					695	395	0.39	4.10

\* Isothermal end force at full stroke.

### Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

### Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

### Additional mounts

FAC-750

230

FCSC-750

236

FFL-750

238

FSS-750

243

K-750

247

L-750

248

RM-750

251

SA-750

253

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## Speed Control™ – SPC gas springs have been engineered to reduce or eliminate blank holder bounce commonly associated with increased return stroke speeds from link drive presses.

SPC gas springs have inbuilt return stroke speed dampening, which decelerates the last 30 mm of the piston rod stroke to 0.4 m/s, helping to bring the blank holder to a smooth stop.

### Features


- Reduces or eliminates blank holder bounce
- Increases productivity by enabling high transfer speeds
- Easily retrofitted to existing dies
- Stroke lengths from 80 to 300 mm
- Linkable using a hose system

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	See chart below
Max piston rod velocity .....	1.6 m/s
Dampening length .....	≈30 mm
End stop speed .....	0.4 m/s
Rod surface .....	Nitrided tube
Tube surface .....	Black oxide
Repair kit.....	3421490



Automotive standard: 5934868, 5937351, 5937387, 5937821, 5937824

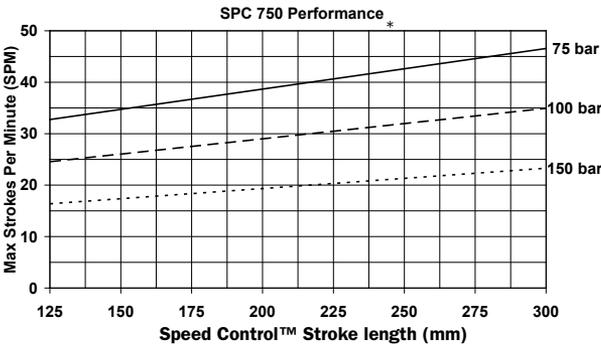

\*At 20°C ambient room temperatures with free convection

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
SPC 750-080	80					270	190	0.30	5.50
SPC 750-100	100					310	210	0.36	5.80
SPC 750-125	125					360	235	0.44	6.10
SPC 750-160	160	7,400	8,700	1,665	2,700	430	270	0.55	6.60
SPC 750-200	200					510	310	0.67	7.15
SPC 750-250	250					610	360	0.83	7.85
SPC 750-300	300					710	410	0.98	8.60

\* Isothermal end force at full stroke.

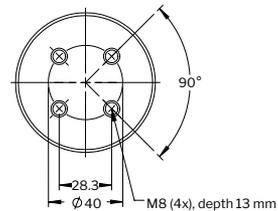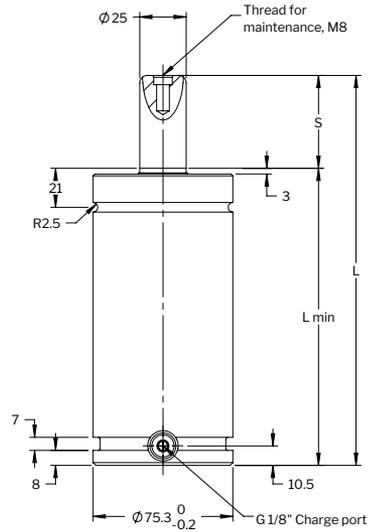

## Mounting possibilities




**Base mount**  
MP



Body  $\varnothing_{\pm}^{+0.5}$   
**Top mount**  
FC, FCS,  
FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S

## Recommended mounts



FC-1500

231



FCS-1500

235



FFC-1500

237



HMF-1500

246



MP-1500

249



S-1500

252

## Additional mounts

FAC-1500

230

FCSC-1500

236

FFL-1500

238

FSS-1500

243

HM-1500

245

K-1500

247

L-1500

248

NMP-2400

250

RM-1500

251

SA-1500

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**Mould Temp gas springs have been engineered to withstand higher working temperatures, like those commonly associated with plastic molding tools. Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used at operating temperatures up to 120°C.**

## Features

- For applications up to 120°C
- Fully adjustable charge pressure
- Various mounting possibilities using our standard mounts as well as bottom threaded holes
- M6 gas ports can be connected to the special high temp version of our Micro EO24™ Hose and Tube system for remote pressure control.

## Basic information


For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	See table below
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +120°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min .....	See table below
Max piston rod velocity .....	1.0 m/s
Service life (0 to 80°C) .....	1,000,000 strokes
or .....	100,000 stroke meters
Service life (80 to 120°C) .....	500,000 strokes
or .....	50,000 stroke meters
Rod surface .....	Nitrided
Repair kit .....	3022686


Max. working temp. interval	Max. strokes per minute (spm)	Max. charge pressure at 20°C (bar)	Force per temperature		
			Spring temp.	Initial force (N)	End force* (N)
0 – 80°C	20	150	80°C	8,870	14,100
			(20°C)	(7,400)	(11,760)
80 – 100°C	15	125	100°C	7,810	12,420
			(20°C)	(6,140)	(9,750)
100 – 120°C	10	115	120°C	7,570	12,050
			(20°C)	(5,650)	(9,000)

Order No.	S stroke	Initial force in N at 150 bar/+20°C	Initial force in lbf at 150 bar/+20°C	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
MT 750-010	10	7,400	1,665	52	42	0.02	0.37
MT 750-013	13			58	45	0.02	0.39
MT 750-016	16			64	48	0.03	0.41
MT 750-019	19			70	51	0.03	0.41
MT 750-025	25			82	57	0.04	0.45
MT 750-032	32			96	64	0.05	0.50
MT 750-038	38			108	70	0.05	0.53
MT 750-050	50			132	82	0.07	0.61
MT 750-063	63			158	95	0.09	0.69
MT 750-075	75			182	107	0.10	0.77
MT 750-080	80			192	112	0.11	0.80

\* Isothermal end force at full stroke.

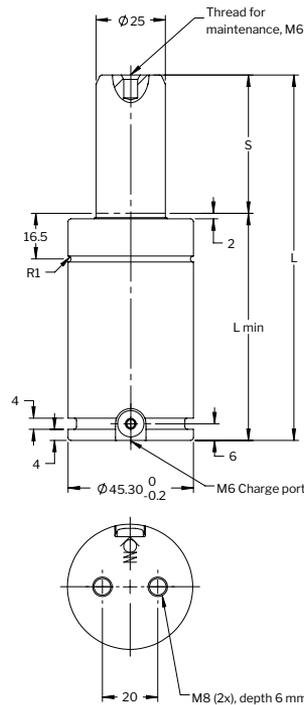

### Mounting possibilities

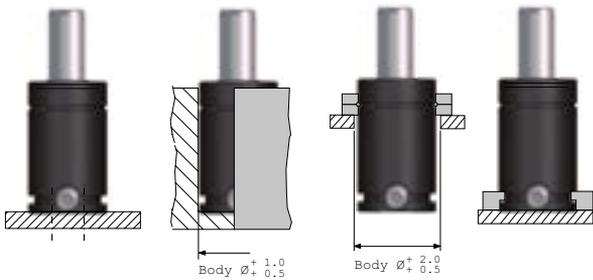

Base mount

Drop - in

Top mount  
FC, FCS

Foot mount  
K, FFC

### Recommended mounts



FC-500

FCS-500

FFC-500

HMF-500

231

235

237

246

### Additional mounts

FCSC-500

K-500

L-500

RMX-750

236

247




248

251

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

# 2 | Overview - $10000 \leq F_{INIT} < 25000$

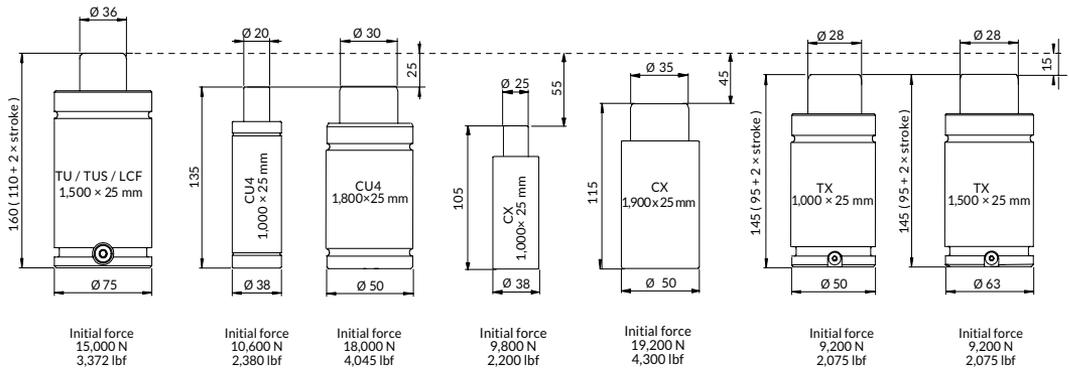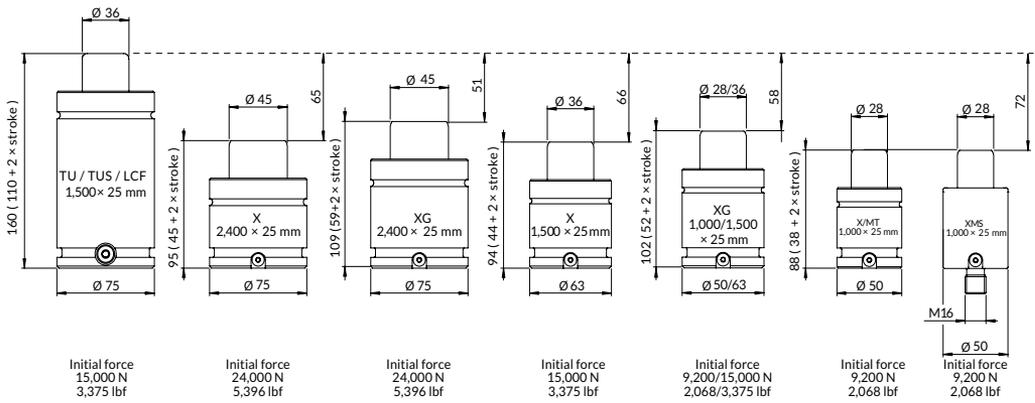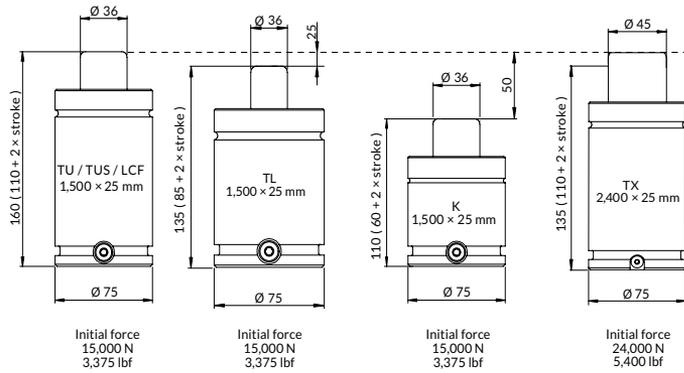

	Page
<b>CU4 1000</b>	<b>102</b>
<b>CU4 1800</b>	<b>104</b>
<b>CX 1000</b>	<b>106</b>
<b>CX 1900</b>	<b>108</b>
<b>X 1000 and XMS 1000</b>	<b>110</b>
<b>XF 1000</b>	<b>112</b>
<b>XG 1000</b>	<b>114</b>
<b>TX 1000</b>	<b>116</b>
<b>X 1500</b>	<b>118</b>
<b>XF 1500</b>	<b>120</b>
<b>XG 1500</b>	<b>122</b>
<b>TX 1500</b>	<b>124</b>
<b>X 2400</b>	<b>126</b>
<b>XF 2400</b>	<b>128</b>
<b>XG 2400</b>	<b>130</b>
<b>TX 2400</b>	<b>132</b>
<b>TL 1500</b>	<b>134</b>
<b>K 1500</b>	<b>136</b>
<b>TU 1500</b>	<b>138</b>
<b>TUS 1500</b>	<b>140</b>
<b>LCF 1500</b>	<b>142</b>
<b>SPC 1500</b>	<b>144</b>
<b>MT 1000</b>	<b>146</b>

The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body. The maximum frequency for the spring is 100 strokes/minute.


Springs with stroke lengths over 25 mm should always be attached to the tool, using a flange or the tapped holes in the bottom of the spring. We also recommend fixing of shorter stroke springs for optimal service life. As an option, the CU4 springs can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024835

Automotive standard: WDX35-62-06010xxDM, Z000336576, Z000235618, Z000346352, Z000459185, 5937656, 5937657, 5937658, 5937659, 5937660

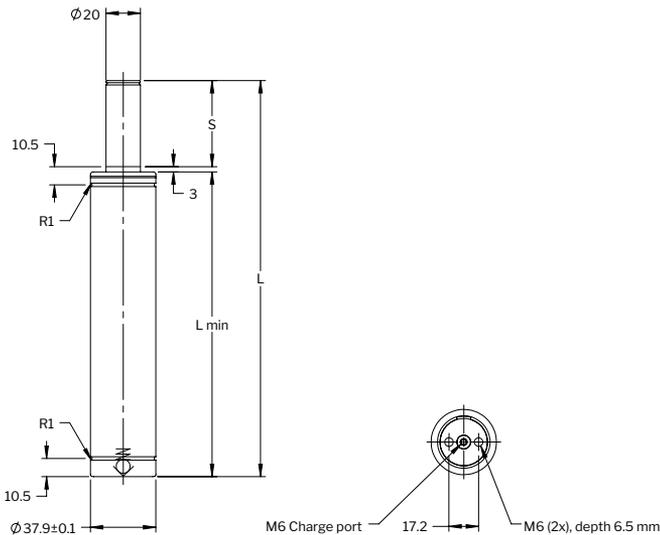


Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 1000-006	6	10,600	16,000	2,400	3,595	61	55	0.014	0.33
CU4 1000-010	10 ■					78	68	0.024	0.38
CU4 1000-016	16 ■					100	84	0.036	0.44
CU4 1000-025	25 ■					135	110	0.056	0.54
CU4 1000-032	32*					167	135	0.074	0.65
CU4 1000-040	40*					195	155	0.092	0.73
CU4 1000-050	50*					230	180	0.110	0.83

\* Should always be attached to the tool using the tapped holes in the bottom or a flange.


\*\* Isothermal end force at full stroke.

■ Recommended stroke length for optimal delivery.


## Mounting possibilities

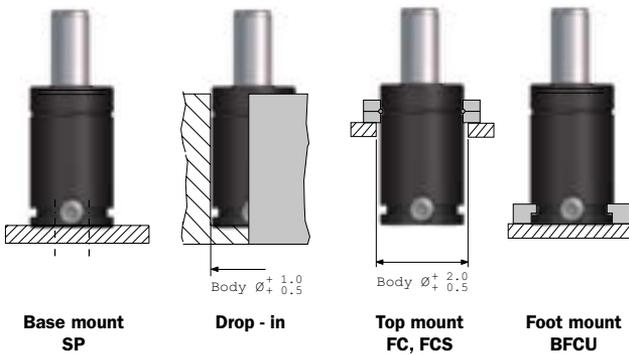

## Recommended mounts

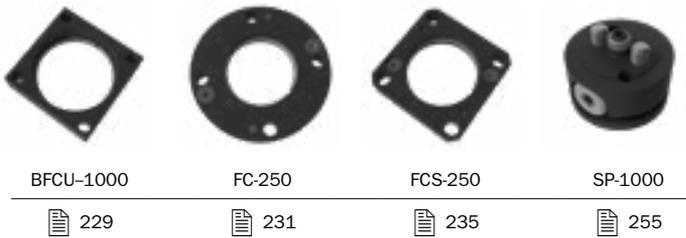

## Additional mounts



### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body. The maximum frequency for the spring is 100 strokes/minute.


Springs with stroke lengths over 25 mm should always be attached to the tool, using a flange or the tapped holes in the bottom of the spring. We also recommend fixing of shorter stroke springs for optimal service life. As an option, the CU4 springs can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024836

Automotive standard: WDX35-62-07018xxDM, Z000283147, Z000236719, Z000367232, 5937661, 5937662, 5937663, 5937664, 5937665, 5937666, 5937702

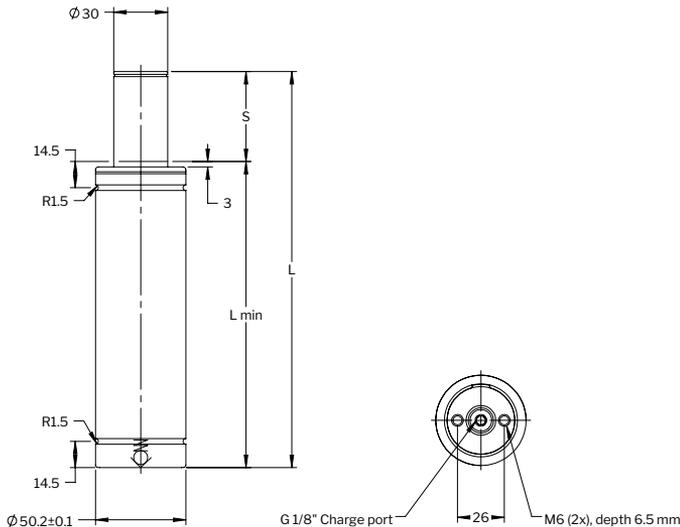


Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 1800-006	6	18,000	24,000	4,050	5,395	66	60	0.030	0.60
CU4 1800-010	10 ■		25,000		5,620	80	70	0.044	0.66
CU4 1800-016	16 ■		25,000		5,620	106	90	0.072	0.79
CU4 1800-025	25 ■		26,000		5,845	135	110	0.100	0.93
CU4 1800-032	32*		26,000		5,845	162	130	0.126	1.06
CU4 1800-040	40*		26,000		5,845	190	150	0.150	1.19
CU4 1800-050	50*		27,000		6,070	220	170	0.179	1.32
CU4 1800-065	65*		28,000		6,294	271	206	0.240	1.52

\* Should always be attached to the tool using the tapped holes in the bottom or a flange.

\*\* Isothermal end force at full stroke.

■ Recommended stroke length for optimal delivery.

### Mounting possibilities

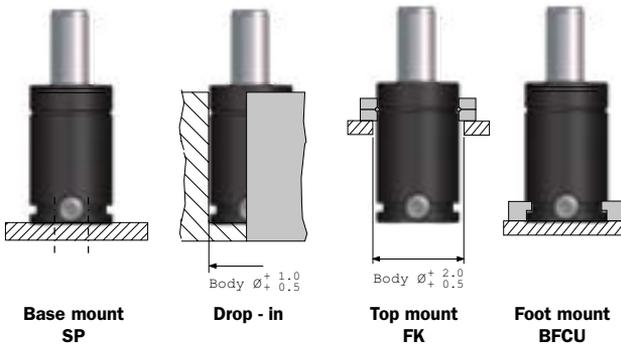

### Recommended mounts



### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.


**With its unique safety and reliability features, Compact Xtreme CX is an extremely compact and powerful piston rod sealed gas spring series. Using the CX gas spring is an excellent way to achieve more cost efficient dies due to lower die height.**

With its extremely compact build height and cylinder diameters, the CX gas spring can reach extreme initial forces, ranging from 5,100 N to 19,200 N with stroke lengths up to 80 mm. The CX gas spring series is similar to the KALLER Power Line X series and provide extreme forces comparable to the bore sealed KALLER Super Compact CU4 series. In addition, the CX gas spring can handle higher stroke frequencies (SPM) compared to similar gas springs on the market, which leads to a higher production rate.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	200 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 70-200
Max piston rod velocity .....	1.6 m/s
Repair kit .....	3022836

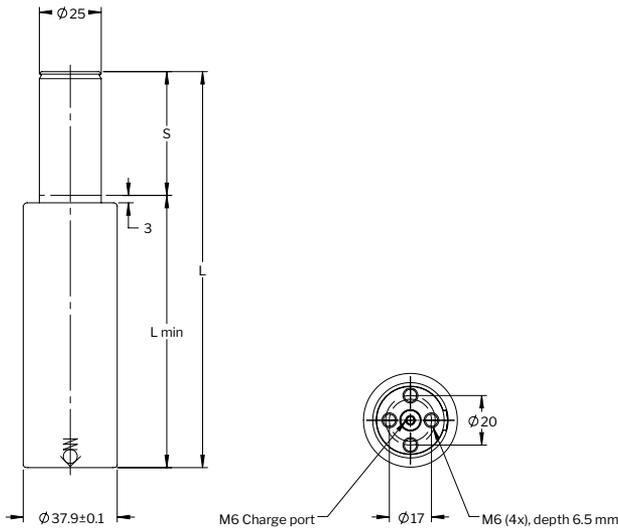


Order No.	S stroke	Force in N at 200 bar/+20°C		Force in lbf at 200 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CX 1000-010	10 ■	9,800	13,300	2,200	2,980	75	65	0.03	0.36
CX 1000-015	15 ■		14,400		3,240	85	70	0.03	0.39
CX 1000-025	25 ■		16,100		3,620	105	80	0.04	0.43
CX 1000-038	38* ■		16,900		3,800	135	97	0.06	0.50
CX 1000-050	50* ■		17,700		3,990	160	110	0.07	0.56
CX 1000-063	63* ■		16,500		3,710	205	142	0.10	0.67
CX 1000-080	80* ■		17,300		3,880	240	160	0.12	0.75

\* For stroke lengths over 25 mm, the spring should be attached to the tool using the threaded holes in the bottom.

\*\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

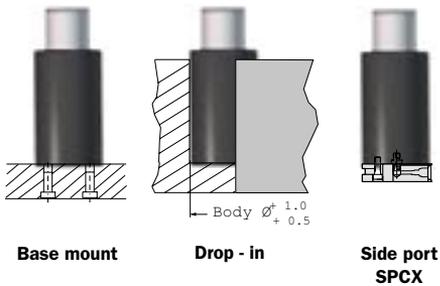

## Recommended mounts



HMF-250

246



SPCX-1000

256

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.


**With its unique safety and reliability features, Compact Xtreme CX is an extremely compact and powerful piston rod sealed gas spring series. Using the CX gas spring is an excellent way to achieve more cost efficient dies due to lower die height.**

With its extremely compact build height and cylinder diameters, the CX gas spring can reach extreme initial forces, ranging from 5,100 N to 19,200 N with stroke lengths up to 80 mm. The CX gas spring series is similar to the KALLER Power Line X series and provide extreme forces comparable to the bore sealed KALLER Super Compact CU4 series. In addition, the CX gas spring can handle higher stroke frequencies (SPM) compared to similar gas springs on the market, which leads to a higher production rate.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	200 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-130
Max piston rod velocity .....	1.6 m/s
Repair kit .....	3022844

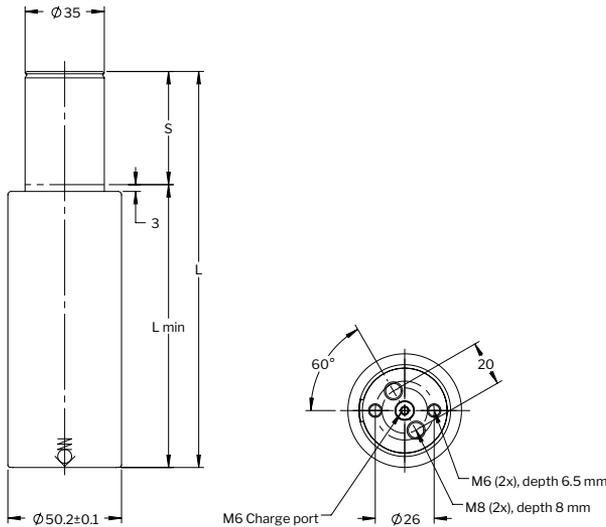


Order No.	S stroke	Force in N at 200 bar/+20°C		Force in lbf at 200 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CX 1900-010	10 ■	19,200	26,300	4,320	5,920	80	70	0.05	0.69
CX 1900-015	15 ■		31,800		7,140	95	80	0.05	0.76
CX 1900-025	25 ■		30,900		6,950	115	90	0.08	0.84
CX 1900-038	38* ■		31,900		7,160	150	112	0.12	0.98
CX 1900-050	50* ■		33,800		7,600	175	125	0.14	1.08
CX 1900-063	63* ■		34,800		7,820	205	142	0.17	1.21
CX 1900-080	80* ■		35,600		8,000	245	165	0.21	1.37

\* For stroke lengths over 25 mm, the spring should be attached to the tool using the threaded holes in the bottom.

\*\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities

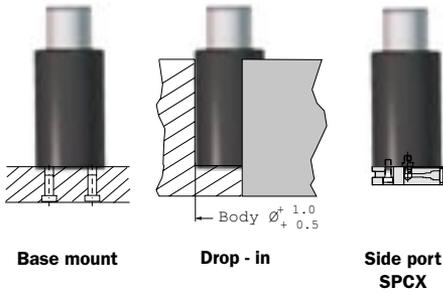

## Recommended mounts



HMF-500

246



SPCX-1900

256

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

# 2 | X 1000 and XMS 1000

**The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.**

These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two M8 threaded holes allows for various mounting possibilities using our standard mounts. The X 1000 model is also available equipped with an M16 threaded tap for mounting. When ordering this version XMS 1000-xxx must be stated on the order.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018847



Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-10000, WDX356204-10xxDMS, GMGDS 90.25.08-10, 39D997xx, B2 4005 21749xx, 04585xx, Z0004591xx, Z000438717, Z000376302, 305075x, 305076x, 90201405890, 90201407787



X 1000




XMS 1000

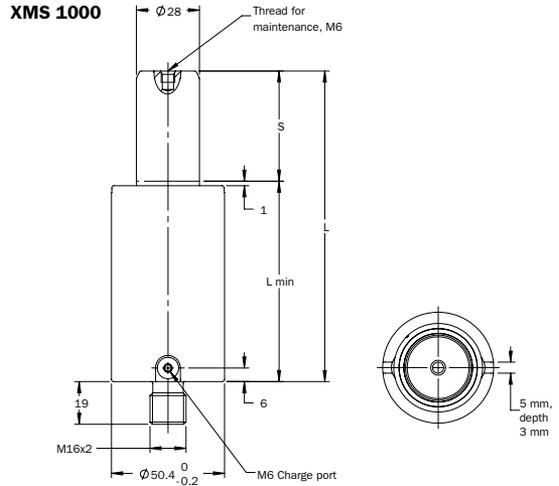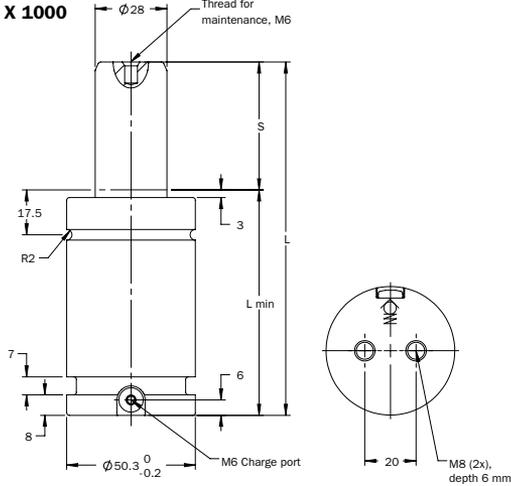


Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X/XMS 1000-013	13	9,200	13,800	2,068	3,103	64	51	0.03	0.50	√
X/XMS 1000-016	16		13,800		3,103	70	54	0.04	0.52	
X/XMS 1000-019	19		14,000		3,147	76	57	0.04	0.54	
X/XMS 1000-025	25		14,200		3,192	88	63	0.05	0.59	√
X/XMS 1000-032	32		14,300		3,215	102	70	0.06	0.64	
X/XMS 1000-038	38		14,500		3,260	114	76	0.07	0.70	√
X/XMS 1000-050	50		14,600		3,282	138	88	0.09	0.79	√
X/XMS 1000-063	63		14,700		3,305	164	101	0.11	0.89	√
X/XMS 1000-075	75		14,700		3,305	188	113	0.13	0.99	
X/XMS 1000-080	80		14,800		3,327	198	118	0.14	1.03	√
X/XMS 1000-100	100		14,800		3,327	238	138	0.17	1.19	√
X/XMS 1000-125	125		14,800		3,327	288	163	0.21	1.39	√

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.


## Mounting possibilities

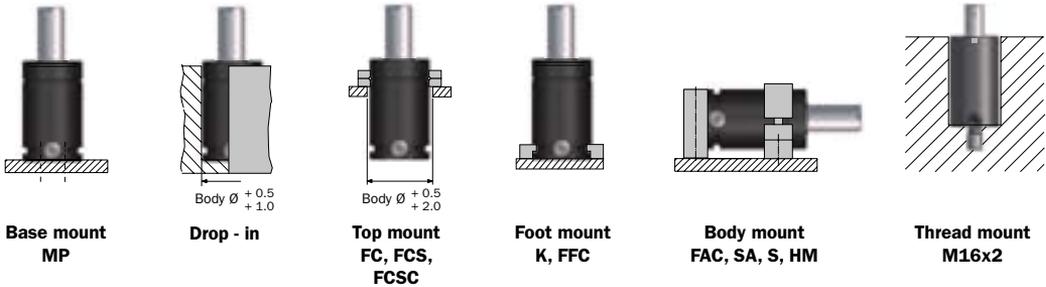

## Recommended mounts

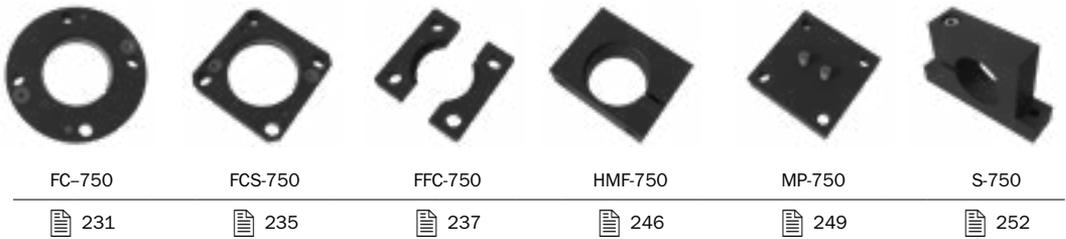

## Additional mounts

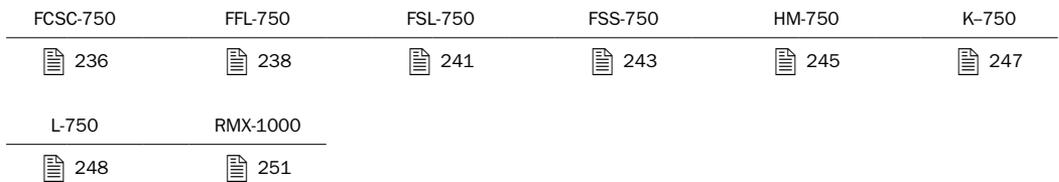

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


The Power Line XF series conforms with the FCA Fiat-Chrysler standard 075.90.60. There is a G 1/8" side port for charging or to connect to a gas link system. The upper ISO Standard C-groove and the threaded bottom hole offer various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018847

Automotive standard: GMGDS 90.25.08-10G, 39-673-0242, 39-673-0243, 39-673-0244, 39-673-0245, 39-673-0246, 39-673-0247, 39-673-0248, 39-673-0249

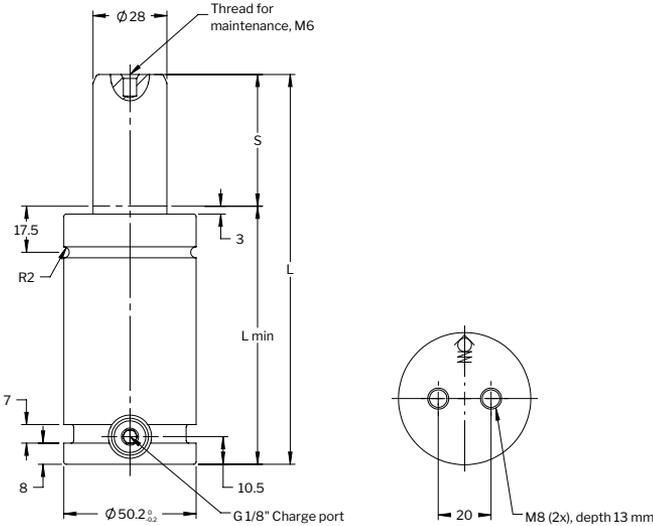

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XF 1000-013	13	9,200	13,800	2,068	3,103	74	61	0.03	0.70
XF 1000-016	16		13,800		3,103	80	64	0.04	0.72
XF 1000-019	19		14,000		3,147	86	67	0.04	0.74
XF 1000-025	25		14,200		3,192	98	73	0.05	0.79
XF 1000-032	32		14,300		3,215	112	80	0.06	0.84
XF 1000-038	38		14,500		3,260	124	86	0.07	0.89
XF 1000-050	50		14,600		3,282	148	98	0.09	0.98
XF 1000-063	63		14,700		3,305	174	111	0.11	1.09
XF 1000-075	75		14,700		3,305	198	123	0.13	1.18
XF 1000-080	80		14,800		3,327	208	128	0.14	1.22
XF 1000-100	100		14,800		3,327	248	148	0.17	1.41
XF 1000-125	125		14,800		3,327	298	173	0.21	1.60

\* Isothermal end force at full stroke.

### Mounting possibilities



**Base mount**  
MP, NMP ,RM



Body Ø  $+0.5$   
 $+1.0$

**Drop - in**




Body Ø  $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
FFC, FFL, FSL,  
FSS, K-lug, L



**Body mount**  
HM, HMF, S, SA

### Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

### Additional mounts

FCSC-750

236

FFL-750

238

FSL-750

241

FSS-750

243

HM-750

245

K-750

247

L-750

248

NMP-1000

250

RM-750

251

SA-750

253

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 3500 N up to 66000 N and stroke lengths between 13 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two M8 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018847

Automotive standard: R9034405xx, MES E7231 PG230-PG24D-10, K32R0-1000, SD116391-1000, M-2404-TD-22-1000

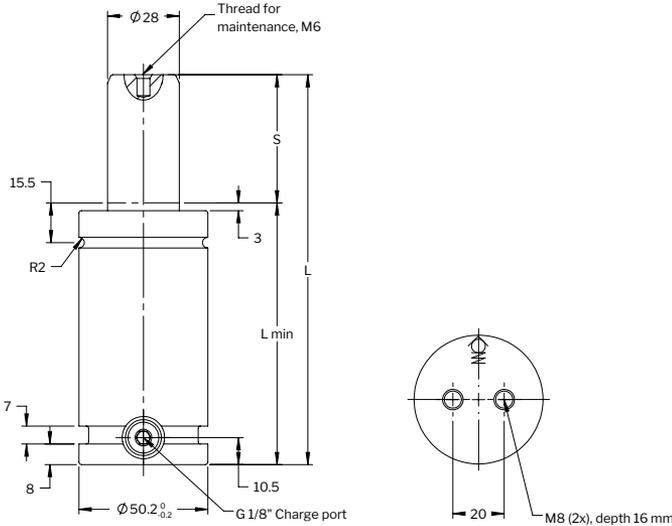

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 1000-013	13	9,200	13,800	2,068	3,103	78	65	0.03	0.70
XG 1000-016	16		13,800		3,103	84	68	0.04	0.72
XG 1000-019	19		14,000		3,147	90	71	0.04	0.74
XG 1000-025	25		14,200		3,192	102	77	0.05	0.79
XG 1000-032	32		14,300		3,215	116	84	0.06	0.84
XG 1000-038	38 ■		14,500		3,260	128	90	0.07	0.89
XG 1000-050	50 ■		14,600		3,282	152	102	0.09	0.98
XG 1000-063	63 ■		14,700		3,305	178	115	0.11	1.09
XG 1000-075	75		14,700		3,305	202	127	0.13	1.18
XG 1000-080	80		14,800		3,327	212	132	0.14	1.22
XG 1000-100	100		14,800		3,327	252	152	0.17	1.41
XG 1000-125	125		14,800		3,327	302	177	0.21	1.60

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



Base mount



Body  $\varnothing$   $\begin{matrix} +0.5 \\ +1.0 \end{matrix}$

Drop - in




Body  $\varnothing$   $\begin{matrix} +0.5 \\ +2.0 \end{matrix}$

Top mount  
FC, FCS



Foot mount  
K, FFC



Body mount  
FAC, SA, S, HM

## Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

## Additional mounts

FCSC-750

236

FFL-750

238

FSL-750

241

FSS-750

243

HM-750

245

K-750

247

L-750

248

NMP-1000

250

RM-750

251

SA-750

253

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line – Heavy Duty Series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3023788

Automotive standard: VDI 3003-Blatt 4, ISO 11901-4-10000, GMGDS 90.25.05-7.5, 39D838xx, B2 4008 21750xx, 39-673-82xx, 305468x, 305469x

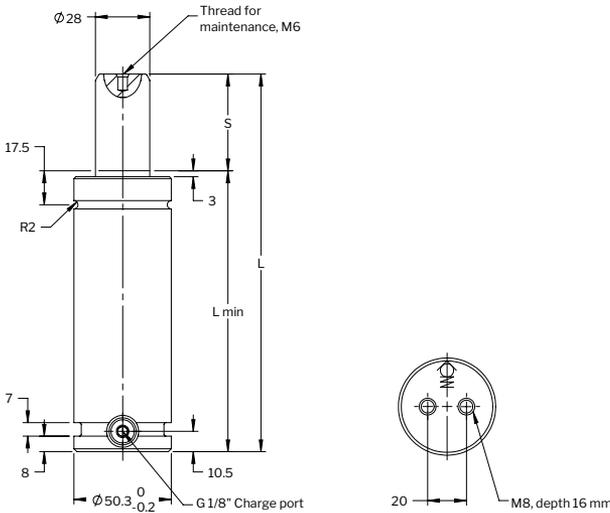

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 1000-013	13	9,200	11,200	2,075	2,525	121	108	0.06	1.17	
TX 1000-025	25		12,100		2,725	145	120	0.07	1.27	√
TX 1000-038	38		12,800		2,875	171	133	0.09	1.32	
TX 1000-050	50		13,200		2,975	195	145	0.11	1.37	√
TX 1000-063	63		13,500		3,050	221	158	0.13	1.58	
TX 1000-075	75		13,700		3,075	245	170	0.15	1.71	
TX 1000-080	80		13,800		3,100	255	175	0.16	1.73	√
TX 1000-100	100		14,100		3,175	295	195	0.19	1.90	√
TX 1000-125	125		14,300		3,225	345	220	0.23	2.11	√
TX 1000-150	150 ■		14,500		3,250	395	245	0.27	2.32	
TX 1000-160	160 ■		14,500		3,250	415	255	0.28	2.40	√
TX 1000-175	175 ■		14,600		3,275	445	270	0.30	2.53	
TX 1000-200	200 ■	14,700	3,300	495	295	0.34	2.74	√		
TX 1000-250	250	14,800	3,325	595	345	0.42	3.16	√		
TX 1000-300	300	14,900	3,350	695	395	0.49	3.58	√		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



Base mount



Body  $\varnothing$   $+0.5$   
 $+1.0$

Drop - in




Body  $\varnothing$   $+0.5$   
 $+2.0$

Top mount  
FC, FCS



Foot mount  
K, FFC



Body mount  
FAC, SA, S, HM

## Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

## Additional mounts

FAC-750

230

FCSC-750

236

FFL-750

238

FSL-750

241

FSS-750

243

HM-750

245

K-750

247

L-750

248

NMP-1000

250

RM-750

251

SA-750

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.**


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two sets M8 threaded holes allows for various mounting possibilities using our standard mounts.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3020434

Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-15000,  
WDX356204-15xxDMS, 39D997xx, B2 4005 21723xx, 04585xx, 1028888

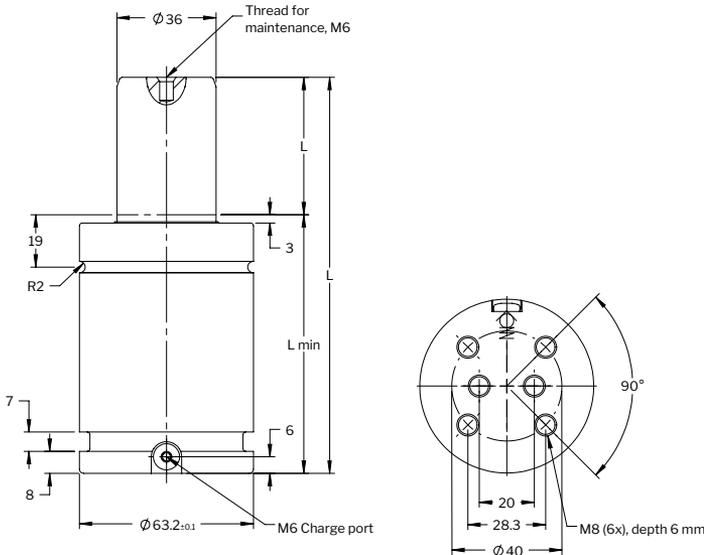

Order No.	S stroke	Force in N at 150 bar / +20°C		Force in lbf at 150 bar / +20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 1500-013	13	15,000	24,000	3,375	5,395	70	57	0.05	0.89	√
X 1500-016	16		24,100		5,420	76	60	0.06	0.93	
X 1500-019	19		24,200		5,440	82	63	0.07	0.96	
X 1500-025	25 ■		24,300		5,365	94	69	0.08	1.03	√
X 1500-032	32		23,800		5,355	108	76	0.11	1.08	
X 1500-038	38 ■		23,900		5,375	120	82	0.12	1.15	√
X 1500-050	50 ■		24,000		5,395	144	94	0.15	1.28	√
X 1500-063	63 ■		24,100		5,420	170	107	0.19	1.43	√
X 1500-075	75		24,200		5,440	194	119	0.22	1.57	
X 1500-080	80		24,200		5,440	204	124	0.24	1.63	√
X 1500-100	100		24,300		5,465	244	144	0.29	1.86	√
X 1500-125	125		24,300		5,465	294	169	0.36	2.15	√

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

**Mounting possibilities**



**Base mount**  
MPX



Body Ø +0.5  
+1.0

**Drop - in**



Body Ø +0.5  
+2.0

**Top mount**  
FCX, FCSX,  
XFC



**Foot mount**  
KX, FFCX, FFX

**Recommended mounts**



FCSX-1500

235



XFC-1500

231



FFX-1500

237



HMF-X1500

246



MPX-1500

249



FFCX-1500

237

**Additional mounts**

FCX-1500

235

FCSCX-1500

236

FSLT-1500

241

KX-1500

247

LX-1500

248

RMX-1500

251

XFCJ-1500

231

**Note!**

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


The Power Line XF series conforms with the FCA Fiat-Chrysler standard 075.90.60. There is a G 1/8" side port for charging or to connect to a gas link system. The upper ISO Standard C-groove and the threaded bottom holes offer various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3020434

Automotive standard: 39-673-0251, 39-673-0252, 39-673-0253, 39-673-0254, 39-673-0255, 39-673-0256, 39-673-0257, 39-673-0258

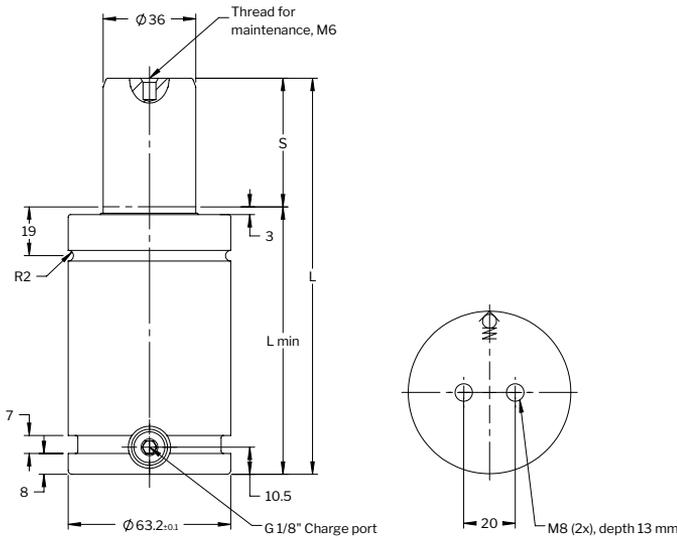

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XF 1500-013	13	15,000	24,000	3,375	5,395	80	67	0.05	1.14
XF 1500-016	16		24,100		5,420	86	70	0.06	1.27
XF 1500-019	19		24,200		5,440	92	73	0.07	1.28
XF 1500-025	25		24,300		5,365	104	79	0.08	1.28
XF 1500-032	32		23,800		5,355	118	86	0.11	1.33
XF 1500-038	38		23,900		5,375	130	92	0.12	1.35
XF 1500-050	50		24,000		5,395	154	104	0.15	1.39
XF 1500-063	63		24,100		5,420	180	117	0.19	1.43
XF 1500-075	75		24,200		5,440	204	129	0.22	1.48
XF 1500-080	80		24,200		5,440	214	134	0.24	1.49
XF 1500-100	100		24,300		5,465	254	154	0.29	2.12
XF 1500-125	125		24,300		5,465	304	179	0.36	2.39

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
RMX, MPX



Body Ø  $+0.5$   
 $+1.0$

**Drop - in**




Body Ø  $+0.5$   
 $+2.0$

**Top mount**  
FCSCX, FCSX,  
FCX



**Foot mount**  
FFX, FFCX, KX,  
K-lug, L



**Body mount**  
HMF

## Recommended mounts



FFCX-1500

237



FCSX-1500

235



FFX-1500

237



HMF-X1500

246



MPX-1500

249



XFC-1500

231

## Additional mounts

FCX-1500

235

FCSCX-1500

236

FSLT-1500

241

KX-1500

247

LX-1500

248

RMX-1500

251

XFCJ-1500

231

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.

These gas springs are available with forces from 3,500 N up to 66,000 N and stroke lengths between 13 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system.


An upper C-groove, lower U-groove together with two M8 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 50-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3020434

Automotive standard: MES E7231 PG230-PG24D-15, M-2404-TD-29-2400

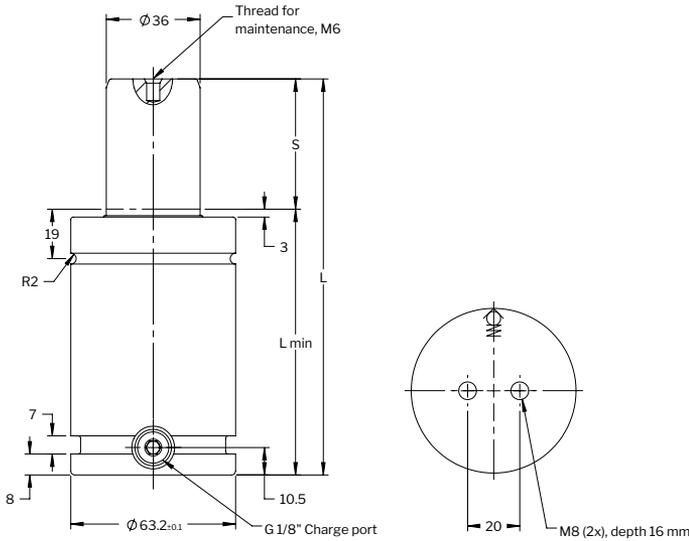

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 1500-013	13	15,000	24,000	3,375	5,395	78	65	0.05	0.9
XG 1500-016	16		24,100		5,420	84	68	0.06	0.9
XG 1500-019	19		24,200		5,440	90	71	0.07	1.0
XG 1500-025	25		24,300		5,365	102	77	0.08	1.0
XG 1500-032	32		23,800		5,355	116	84	0.11	1.1
XG 1500-038	38 ■		23,900		5,375	128	90	0.12	1.2
XG 1500-050	50 ■		24,000		5,395	152	102	0.15	1.3
XG 1500-063	63 ■		24,100		5,420	178	115	0.19	1.4
XG 1500-075	75		24,200		5,440	202	127	0.22	1.4
XG 1500-080	80		24,200		5,440	212	132	0.24	1.4
XG 1500-100	100		24,300		5,465	252	152	0.29	1.9
XG 1500-125	125		24,300		5,465	302	177	0.36	2.2

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount,  
MPX**



Body Ø +0.5  
+1.0

**Drop - in**



Body Ø +0.5  
+2.0

**Top mount  
FCX, FCSX**



**Foot mount  
KX, FFCX, FFX**

## Recommended mounts



FCSX-1500

235



XFC-1500

231



FFX-1500

237



HMF-X1500

246



MPX-1500

249



FFCX-1500

237

## Additional mounts

FCSCX-1500

236

FSLT-1500

241

KX-1500

247

LX-1500

248

RMX-1500

251

FCX-1500

235

XFCJ-1500

231

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line – Heavy Duty Series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3026202

Automotive standards: ISO 11901-4:15000, GMGDS 90.25.05-15

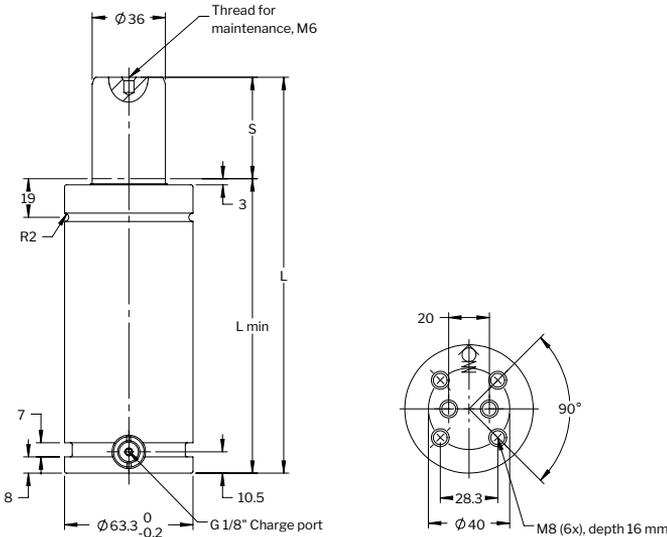

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 1500-013	13		17,700		3,979	121	108	0.10	1.76	
TX 1500-025	25		19,100		4,294	145	120	0.13	1.89	√
TX 1500-038	38		20,000		4,496	171	133	0.17	2.04	
TX 1500-050	50		20,600		4,631	195	145	0.20	2.18	√
TX 1500-063	63		21,100		4,743	221	158	0.23	2.33	
TX 1500-075	75		21,500		4,833	245	170	0.27	2.47	
TX 1500-080	80		21,600		4,856	255	175	0.28	2.52	√
TX 1500-100	100	15,000	21,700	3,372	4,878	295	195	0.33	2.76	√
TX 1500-125	125		22,400		4,968	345	220	0.40	3.04	√
TX 1500-150	150 ■		22,500		5,036	395	245	0.47	3.33	
TX 1500-160	160 ■		22,600		5,058	415	255	0.50	3.44	√
TX 1500-175	175 ■		22,600		5,081	445	270	0.54	3.61	
TX 1500-200	200 ■		22,800		5,126	495	295	0.60	3.90	√
TX 1500-250	250		23,000		5,171	595	345	0.74	4.47	√
TX 1500-300	300		23,200		5,216	695	395	0.87	5.05	√

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MPX



Body  $\varnothing$   $\begin{matrix} +0.5 \\ +1.0 \end{matrix}$

**Drop - in**



Body  $\varnothing$   $\begin{matrix} +0.5 \\ +2.0 \end{matrix}$

**Top mount**  
FCX, FCSX,  
XFC



**Foot mount**  
KX, FFC

## Recommended mounts



FCSX-1500

235



XFC-1500

231



FFX-1500

237



HMF-X1500

246



MPX-1500

249



FFCX-1500

237

## Additional mounts

FCSCX-1500

236

FSLT-1500

241

KX-1500

247

LX-1500

248

RMX-1500

251

FCX-1500

235

XFCJ-1500

231

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.

These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with four M8 threaded holes allows for various mounting possibilities using our standard mounts.


### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018848

The X 2400-016 and X 2400-019 are not possible to repair.

Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-24000, WDX356204-24xxDMS, GMGDS 90.25.08-24, 39D997xx, B2 4005 21723xx, 04585xx, Z000410552, Z000479498, Z0004591xx, Z000365402

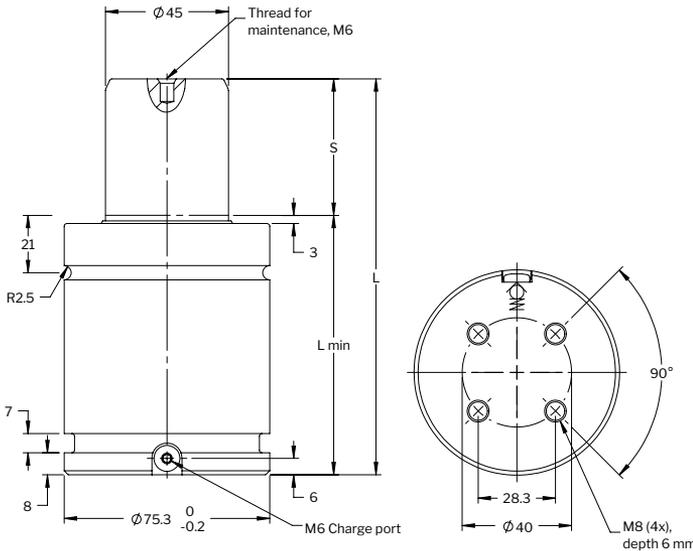

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 2400-016	16	24,000	38,300	5,396	8,611	77	61	0.09	1.34	
X 2400-019	19		38,500		8,656	83	64	0.10	1.38	
X 2400-025	25 ■		38,700		8,701	95	70	0.13	1.45	✓
X 2400-032	32		38,600		8,678	109	77	0.16	1.56	
X 2400-038	38 ■		38,400		8,633	121	83	0.18	1.65	✓
X 2400-050	50 ■		39,200		8,813	145	95	0.23	1.84	✓
X 2400-063	63 ■		39,200		8,813	171	108	0.28	2.20	✓
X 2400-075	75		39,200		8,813	195	120	0.33	2.26	
X 2400-080	80		39,200		8,813	205	125	0.35	2.32	✓
X 2400-100	100		39,300		8,835	245	145	0.43	2.66	✓
X 2400-125	125		39,300		8,835	295	170	0.54	3.05	✓

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

**Mounting possibilities**



**Base mount**  
MP



Body Ø +0.5  
+1.0

**Drop - in**




Body Ø +0.5  
+2.0

**Top mount**  
FC, FCS



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

**Recommended mounts**



FC-1500

231



FCS-1500

235



FFC-1500

237



HMF-1500

246



MP-1500

249



S-1500

252

**Additional mounts**

FCSC-1500

236

FFL-1500

238

FSL-1500

241

FSS-1500

243

HM-1500

245

K-1500

247

L-1500

248

RMX-2400

251

**Note!**

For dimensions on all mount options, refer to “Mounts” in chapter 3.


## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.

The Power Line XF series conforms with the FCA Fiat-Chrysler standard 075.90.60. There is a G 1/8" side port for charging or to connect to a gas link system. The upper ISO Standard C-groove and the threaded bottom hole offer various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018848
Automotive standard: GMGDS 90.25.08-24G, 39-673-0260, 39-673-0261, 39-673-0262, 39-673-0263, 39-673-0264, 39-673-0265, 39-673-0266	

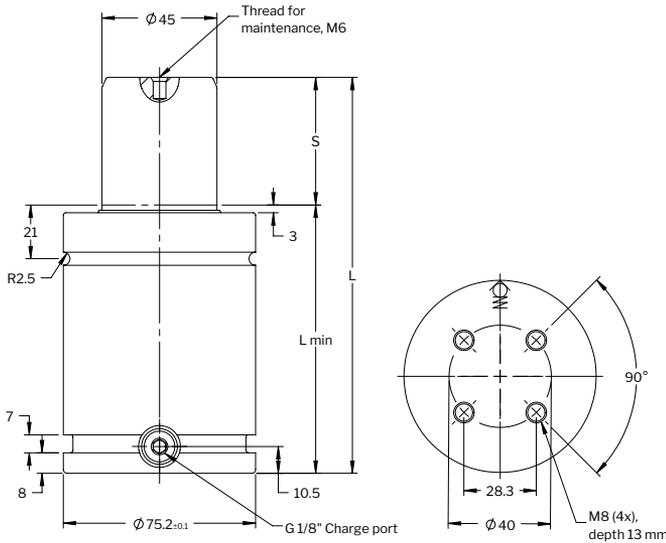

Order No.	s stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XF 2400-016	16	24,000	38,300	5,396	8,611	87	71	0.09	1.66
XF 2400-019	19		38,500		8,656	93	74	0.10	1.71
XF 2400-025	25		38,700		8,701	105	80	0.13	1.81
XF 2400-032	32		38,600		8,678	119	87	0.16	1.93
XF 2400-038	38		38,400		8,633	131	93	0.18	2.03
XF 2400-050	50		39,200		8,813	155	105	0.23	2.23
XF 2400-063	63		39,200		8,813	181	118	0.28	2.44
XF 2400-075	75		39,200		8,813	205	130	0.33	2.64
XF 2400-080	80		39,200		8,813	215	135	0.35	2.72
XF 2400-100	100		39,300		8,835	255	155	0.43	3.05
XF 2400-125	125		39,300		8,835	305	180	0.54	3.47

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**



Body Ø +0.5  
+1.0

**Drop - in**




Body Ø +0.5  
+2.0

**Top mount**  
FC, FCS



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-1500

231



FCS-1500

235



FFC-1500

237



HMF-1500

246



MP-1500

249



S-1500

252

## Additional mounts

FCSC-1500

236

FFL-1500

238

FSL-1500

241

FSS-1500

243

HM-1500

245

K-1500

247

L-1500

248

NMP-2400

250

RM-1500

251

SA-1500

253

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.

These gas springs are available with forces from 3,500 N up to 66,000 N and stroke lengths between 10 and 125 mm. There is a side and bottom port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with four M8 threaded holes allows for various mounting possibilities using our standard mounts.


### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018848

The X 2400-016 and X 2400-019 are not possible to repair.

Automotive standard: R9034405xx, MES E7231 PG230-PG24D-2A, K32R0-2400, SD116391-2400, M-2404-TD-36-4200

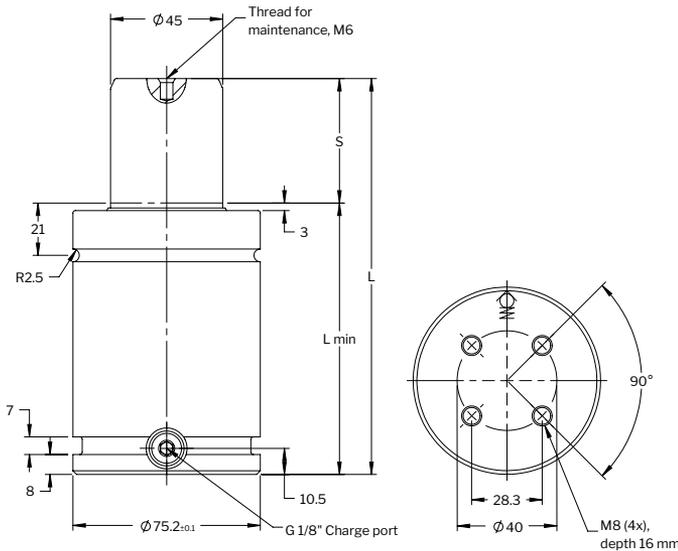

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 2400-016	16	24,000	38,300	5,396	8,611	91	75	0.09	1.77
XG 2400-019	19		38,500		8,656	97	78	0.10	1.82
XG 2400-025	25		38,700		8,701	109	84	0.13	1.89
XG 2400-032	32		38,600		8,678	123	91	0.16	2.00
XG 2400-038	38 ■		38,400		8,633	135	97	0.18	2.10
XG 2400-050	50 ■		39,200		8,813	159	109	0.23	2.28
XG 2400-063	63 ■		39,200		8,813	185	122	0.28	2.56
XG 2400-075	75		39,200		8,813	209	134	0.33	2.75
XG 2400-080	80		39,200		8,813	219	139	0.35	2.83
XG 2400-100	100		39,300		8,835	259	159	0.43	3.15
XG 2400-125	125		39,300		8,835	309	184	0.54	3.54

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**



Body Ø  $+0.5$   
 $+1.0$

**Drop - in**




Body Ø  $+0.5$   
 $+2.0$

**Top mount**  
**FC, FCS**



**Foot mount**  
**K, FFC**



**Body mount**  
**FAC, SA, S, HM**

## Recommended mounts



FC-1500



231



FCS-1500



235



FFC-1500



237



HMF-1500



246



MP-1500



249



S-1500



252

## Additional mounts

FCSC-1500



236

FFL-1500



238

FSL-1500



241

FSS-1500



243

HM-1500



245

K-1500



247

L-1500



248

NMP-2400



250

RM-1500



251

SA-1500



253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line – Heavy Duty series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3022952

Automotive standard: VDI 3003-Blatt 4, ISO 11901-4-24000, GMGDS 90.25.05-15, 39D838xx, B2 4008 21750xx, 39-673-829x, 39-673-830x, 305469x

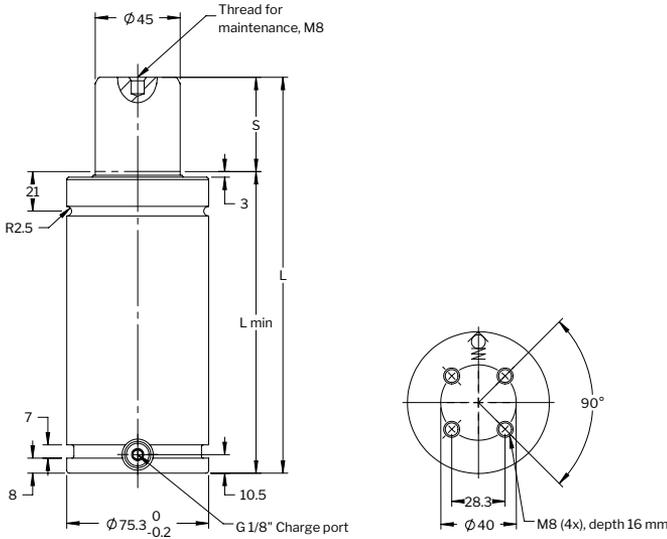

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 2400-025	25	24,000	37,100	5,400	8,350	160	135	0.23	3.1	√
TX 2400-038	38		37,600		8,450	186	148	0.28	3.31	
TX 2400-050	50		37,900		8,525	210	160	0.33	3.5	√
TX 2400-063	63		38,100		8,575	236	173	0.38	3.7	
TX 2400-075	75		38,300		8,625	260	185	0.43	3.89	
TX 2400-080	80		38,300		8,625	270	190	0.45	3.97	√
TX 2400-100	100		38,500		8,650	310	210	0.53	4.29	√
TX 2400-125	125		38,700		8,700	360	235	0.63	4.68	√
TX 2400-150	150 ■		38,800		8,725	410	260	0.73	5.07	
TX 2400-160	160 ■		38,800		8,725	430	270	0.77	5.23	√
TX 2400-175	175 ■		38,900		8,750	460	285	0.83	5.47	
TX 2400-200	200 ■		38,900		8,750	510	310	0.93	5.86	√
TX 2400-250	250	39,000	8,775	610	360	1.17	6.65	√		
TX 2400-300	300	39,100	8,800	710	410	1.33	7.44	√		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-1500

231



FCS-1500

235



FFC-1500

237



HMF-1500

246



MP-1500

249



S-1500

252

## Additional mounts

FAC-1500

230

FCSC-1500

236

FFL-1500

238

FSL-1500

241

FSS-1500

243

HM-1500

245

K-1500

247

L-1500

248

NMP-2400

250

RM-1500

251

SA-1500

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TL Series ranges from model sizes 750 to 7,500, with similar features and technology as the TU series.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3024144

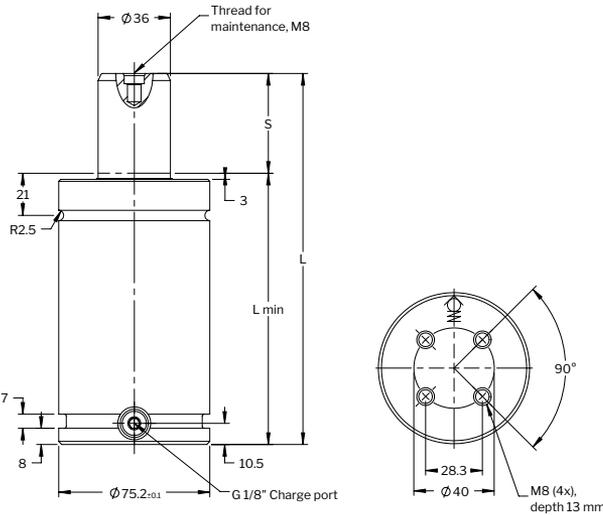

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TL 1500-013	12.5	15,000	18,000	3,370	4,050	110	97.5	0.11	2.65
TL 1500-025	25		19,200		4,320	135	110	0.15	2.88
TL 1500-038	37.5		20,000		4,500	160	122.5	0.19	3.11
TL 1500-050	50		20,400		4,590	185	135	0.23	3.34
TL 1500-063	62.5		20,700		4,650	210	147.5	0.27	3.57
TL 1500-075	75		20,900		4,700	235	160	0.31	3.88
TL 1500-080	80		21,000		4,720	245	165	0.33	3.89
TL 1500-088	87.5		21,100		4,740	260	172.5	0.35	4.03
TL 1500-100	100		21,200		4,770	285	185	0.39	4.26
TL 1500-113	112.5		21,400		4,810	310	197.5	0.43	4.49
TL 1500-125	125		21,500		4,830	335	210	0.47	4.71
TL 1500-138	137.5		22,000		4,950	360	222.5	0.49	4.94
TL 1500-150	150		22,000		4,950	385	235	0.52	5.17
TL 1500-160	160		22,100		4,970	405	245	0.56	5.36
TL 1500-175	175		22,100		4,970	435	260	0.60	5.63
TL 1500-200	200		22,100		4,970	485	285	0.68	6.09
TL 1500-225	225		22,200		4,990	535	310	0.76	6.55
TL 1500-250	250		22,200		4,990	585	335	0.84	7.01

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
**FC, FCS**



**Foot mount**  
**K, FFC**



**Body mount**  
**FAC, SA, S, HM**

## Recommended mounts



FC-1500



231



FCS-1500



235



FFC-1500



237



HMF-1500



246



MP-1500



249



S-1500



252

## Additional mounts

FAC-1500



230

FCSC-1500



236

FFL-1500



238

FSL-1500



241

FSS-1500



243

HM-1500



245

K-1500



247

L-1500



248

NMP-2400



250

RM-1500



251

SA-1500



253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## This is a short height hoseable spring with an initial force of 15,000 N.

The K 1500 has a total length of 60 mm + (2 × stroke). This spring is 50 mm shorter than the TU 1500.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3017230-1500

Automotive standard: R100288379. R100288383. R100288384. R100288385

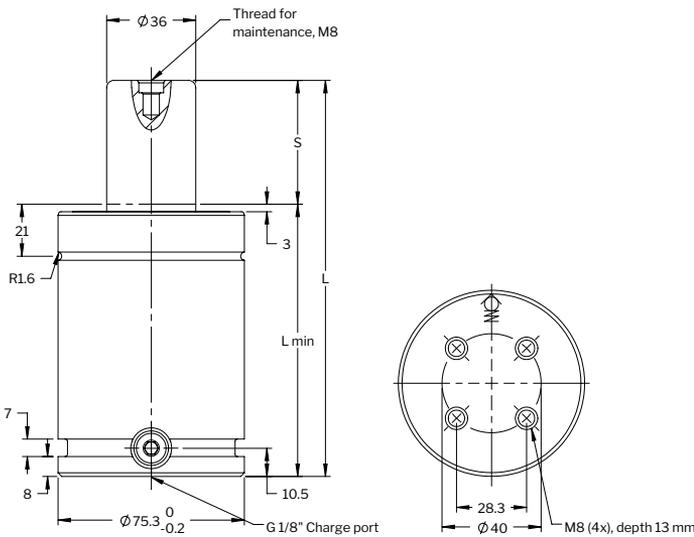

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L $\pm 0.25$	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
K 1500-025	25	15,000	24,000	3,375	5,400	110	85	0.10	2.05
K 1500-038	38.1		23,000		5,170	136.2	98.1	0.14	2.35
K 1500-050	50		23,000		5,170	160	110	0.18	2.50
K 1500-064	63.5		23,000		5,170	187	123.5	0.22	2.75
K 1500-080	80		23,000		5,170	220	140	0.27	3.05
K 1500-100	100		23,000		5,170	260	160	0.34	3.40

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP




Drop - in  
Body  $\varnothing$   $+0.5$   
 $+1.0$



Top mount  
FK  
Body  $\varnothing$   $+0.5$   
 $+2.0$



Foot mount  
K, FFC



Body mount  
SA, S

## Recommended mounts



FFC-1500



237



FK-1500



239



HMF-1500



246



MP-1500



249



S-1500



252

## Additional mounts

FFL-1500



238

FSS-1500



243

K-1500



247

L-1500



248

RM-1500



251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TU line constitutes our standard line of gas springs. Sizes 250 to 10,000 conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	2014068-02

Automotive standard: VDI 3003, ISO 11901-1-15000, WDX356203-15xxDMS, GMGDS 90.25.00-15, 39D878xx, B2 4006 0998614, B2 4006 21710xx, B2 4006 3273508, B2 4006 3860208, B2 4006 3352603, B2 4006 09677xx, 03323xx, X3465902xx, X3465900xx, Z000296562, X346590618, X346590004, R1000362xx, R1002297xx, 39-673-52xx, N0315xx, MES E7231 PG230-PG23D-15, K32S0-1500, 997595x, 304418x, 997595x, 997596x, SD116322-1500, M-2401-TD-7-1500, 90201402297

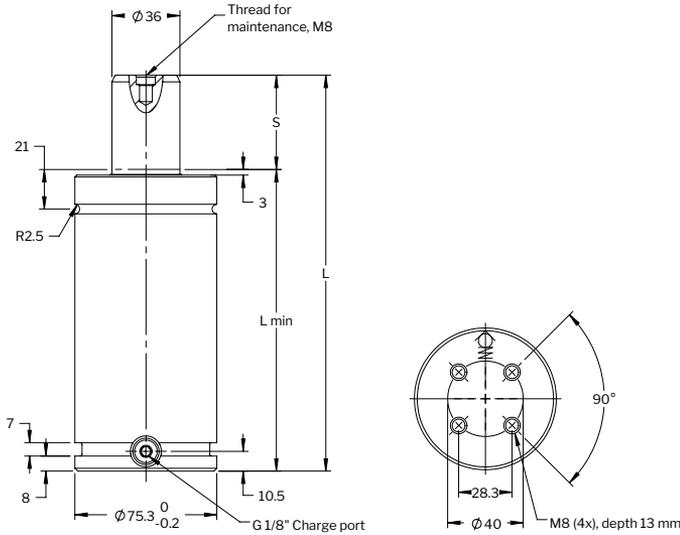

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L $\pm 0.25$	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 1500-025	25 ■	15,000	23,000	3,375	5,170	160	135	0.10	3.65	✓
TU 1500-038	38.1					186.2	148.1	0.15	3.89	
TU 1500-050	50 ■					210	160	0.18	4.11	✓
TU 1500-064	63.5					237	173.5	0.22	4.35	
TU 1500-080	80 ■					270	190	0.28	4.66	✓
TU 1500-100	100					310	210	0.34	5.02	✓
TU 1500-125	125					360	235	0.42	5.48	✓
TU 1500-160	160 ■					430	270	0.53	6.12	✓
TU 1500-175	175					460	285	0.60	6.34	
TU 1500-200	200					510	310	0.68	6.86	✓
TU 1500-225	225					560	335	0.76	7.26	
TU 1500-250	250					610	360	0.81	7.77	✓
TU 1500-300	300	710	410	0.96	8.69	✓				

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-1500



FCS-1500



FFC-1500



HMF-1500



MP-1500



S-1500



## Additional mounts

FAC-1500



FCSC-1500



FFL-1500



FSL-1500



FSS-1500



HM-1500



K-1500



L-1500



NMP-2400



RM-1500



SA-1500



## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The High Speed gas springs (TUS) have been engineered to withstand press stroke speeds to a maximum of 2 m/s, which meet the safety requirements from the French automotive manufacturer Renault.


These gas springs are available in sizes from 750 to 7,500 and dimensions that conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	2.0 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019278

Automotive standard: R903636007, R903636008, R903636009, R903636010, R903636011, R903636012, R903636013, R903636014, R903636015

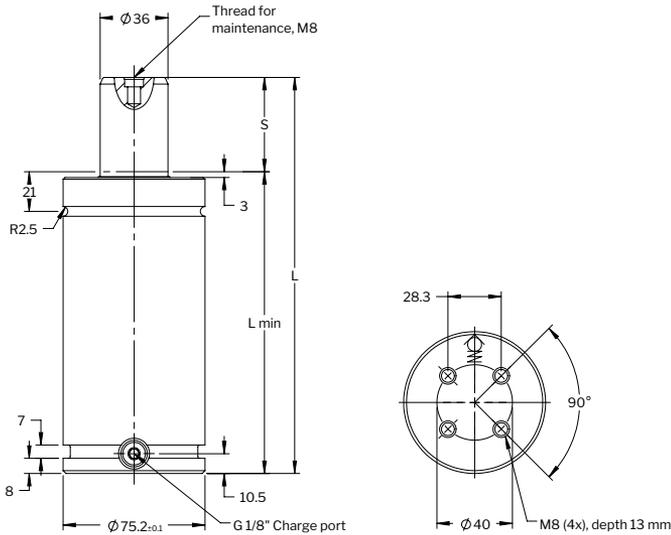

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TUS 1500-025	25	15,000	23,000	3,375	5,170	160	135	0.10	3.75
TUS 1500-038	38.1		23,000			186.2	148.1	0.15	3.95
TUS 1500-050	50		23,000			210	160	0.18	4.15
TUS 1500-064	63.5		23,000			237	173.5	0.22	4.40
TUS 1500-080	80		23,000			270	190	0.28	4.70
TUS 1500-100	100		23,000			310	210	0.34	5.10
TUS 1500-125	125		23,000			360	235	0.42	5.55
TUS 1500-160	160		23,000			430	270	0.53	6.25
TUS 1500-200	200		23,000			510	310	0.68	6.90
TUS 1500-250	250		23,000			610	360	0.81	7.80
TUS 1500-300	300	23,000	710	410	0.96	8.90			

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP




Drop - in  
Body  $\varnothing$   $+0.5$   
 $+1.0$



Top mount  
FC, FCS, FCSC  
Body  $\varnothing$   $+0.5$   
 $+2.0$



Foot mount  
K, FFC



Body mount  
FAC, SA, S, HM

## Recommended mounts



FC-1500



231



FCS-1500



235



FFC-1500



237



HMF-1500



246



MP-1500



249



S-1500



252

## Additional mounts

FAC-1500



230

FCSC-1500



236

FFL-1500



238

FSL-1500



241

FSS-1500



243

HM-1500



245

K-1500



247

L-1500



248

NMP-2400



250

RM-1500



251

SA-1500



253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.



**Low Contact Force (LCF) gas springs are designed to reduce excessive shock loads, high noise levels and extreme pad bounce, all factors that lead to high press maintenance costs and noise pollution.**




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	105 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit.....	3019378

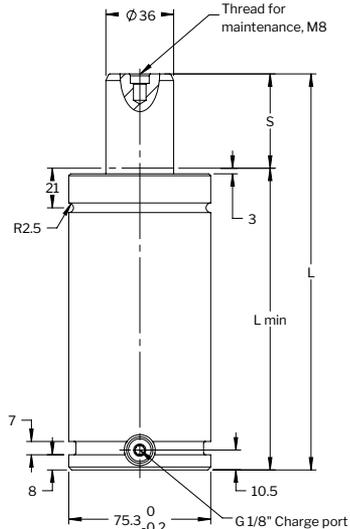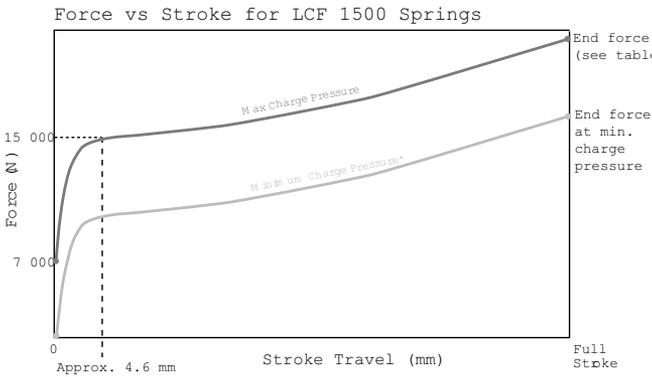

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
LCF 1500-025	25		23,000			160	135	0.10	3.75
LCF 1500-038	38.1		23,000			186.2	148.1	0.15	3.95
LCF 1500-050	50		23,000			210	160	0.18	4.15
LCF 1500-064	63.5		23,000			237	173.5	0.22	4.40
LCF 1500-080	80		23,000			270	190	0.28	4.70
LCF 1500-100	100	15,000	23,000	3,375	5,170	310	210	0.34	5.10
LCF 1500-125	125		23,000			360	235	0.42	5.55
LCF 1500-160	160		23,000			430	270	0.53	6.25
LCF 1500-200	200		23,000			510	310	0.68	6.90
LCF 1500-250	250		23,000			610	360	0.81	7.80
LCF 1500-300	300		23,000			710	410	0.96	8.90

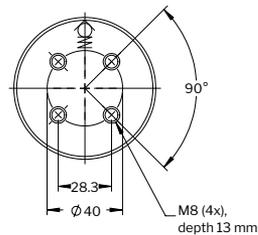

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-1500

231



FCS-1500

235



FFC-1500

237



HMF-1500

246



MP-1500

249



S-1500

252

## Additional mounts

FAC-1500

230

FCSC-1500

236

FFL-1500

238

FSS-1500

243

HM-1500

245

K-1500

247

L-1500

248

RM-1500

251

SA-1500

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## Speed Control™ – SPC gas springs have been engineered to reduce or eliminate blank holder bounce, commonly associated with increased return stroke speeds from link drive presses.

SPC gas springs have inbuilt return stroke speed dampening, which decelerates the last 30 mm of the piston rod stroke to 0.4 m/s, helping to bring the blank holder to a smooth stop.

### Features


- Reduces or eliminates blank holder bounce
- Increases productivity by enabling high transfer speeds
- Easily retrofitted to existing dies
- Stroke lengths from 125 to 300 mm
- Linkable using a hose system

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	See chart
Max piston rod velocity .....	1.6 m/s
Dampening length .....	≈ 30 mm
End stop speed .....	0.4 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3421494



Automotive standard: 5937839, 5937840, 5937841, 5937842, 5937843

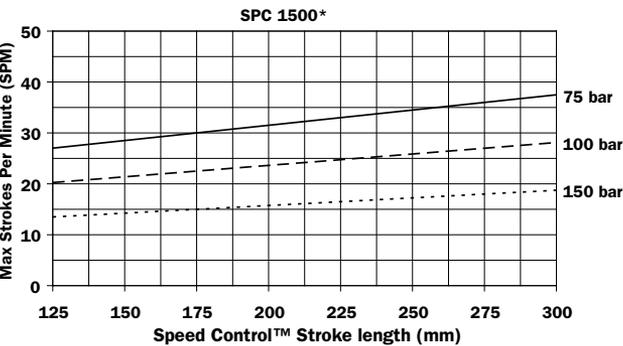

\*At 20°C room temperatures with free convection

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
SPC 1500-125	125					370	245	0.73	7.60
SPC 1500-160	160					440	280	0.91	8.45
SPC 1500-200	200	15,000	19,000	3,375	4,275	520	320	1.11	9.43
SPC 1500-250	250					620	370	1.36	10.64
SPC 1500-300	300					720	420	1.62	11.86

\* Isothermal end force at full stroke.

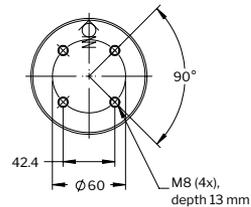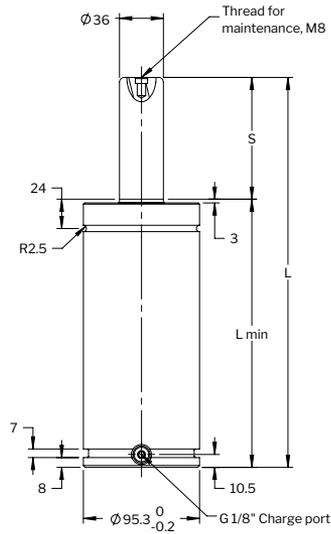

## Mounting possibilities



**Base mount**  
MP



Body Ø +0.5  
+1.0

**Drop - in**



Body Ø +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC

## Recommended mounts



FC-3000

231



FCS-3000

235



FFC-3000

237



HMF-3000

246



MP-3000

249



S-3000

252

## Additional mounts

FAC-3000

230

FCSC-3000

236

FFL-3000

238

FSS-3000

243

HM-3000

245

K-3000

247

L-3000

248

NMP-4200

250

RM-3000

251

SA-3000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

Mould Temp gas springs have been engineered to withstand higher working temperatures, like those commonly associated with plastic molding tools. Mould Temp gas springs are compact and powerful piston rod sealed gas springs, which can be used at operating temperatures up to 120°C.

## Features

- For applications up to 120°C
- Fully adjustable charge pressure
- Various mounting possibilities using our standard mounts as well as bottom threaded holes
- M6 gas ports can be connected to the special high temp version of our Micro EO24™ Hose and Tube system for remote pressure control.

## Basic information


For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	See table below
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +120°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min .....	See table below
Max piston rod velocity .....	1.0 m/s
Service life (0 to 80°C) .....	1,000,000 strokes
or .....	100,000 stroke meters
Service life (80 to 120°C) .....	500,000 strokes
or .....	50,000 stroke meters
Rod surface .....	Nitrided
Repair kit .....	3022690

Max. working temp. interval	Max. strokes per minute (spm)	Max. charge pressure at 20°C (bar)	Force per temperature		
			Spring temp.	Initial force (N)	End force* (N)
0 – 80°C	20	150	80°C	11,130	17,500
			(20°C)	(9,200)	(14,500)
80 – 100°C	15	125	100°C	9,800	15,400
			(20°C)	(7,700)	(12,100)
100 – 120°C	10	115	120°C	9,500	14,900
			(20°C)	(7,080)	(11,100)

Order No.	S stroke	Initial force in N at 150 bar/+20°C	Initial force in lbf at 150 bar/+20°C	L ±0.25	L min.	Gas vol. (l)	Weight (kg)
MT 1000-013	13	9,200	2,068	64	51	0.03	0.52
MT 1000-016	16			70	54	0.04	0.54
MT 1000-019	19			76	57	0.04	0.56
MT 1000-025	25			88	63	0.05	0.61
MT 1000-032	32			102	70	0.06	0.66
MT 1000-038	38			114	76	0.07	0.71
MT 1000-050	50			138	88	0.09	0.81
MT 1000-063	63			164	101	0.11	0.91
MT 1000-075	75			188	113	0.13	1.02
MT 1000-080	80			198	118	0.14	1.05

\* Isothermal end force at full stroke.

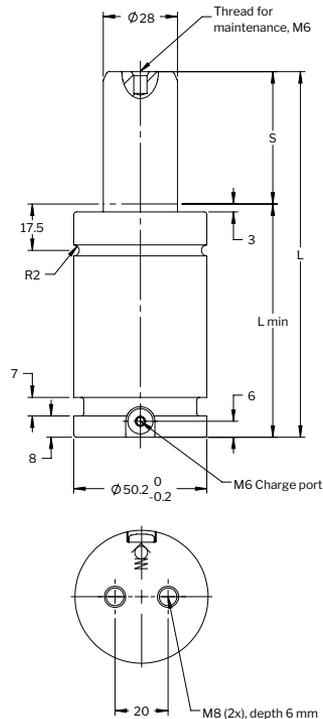

## Mounting possibilities



**Base mount**  
MP




**Drop - in**



**Top mount**  
FC, FCS,  
FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM



**Thread mount**  
M16x2

## Recommended mounts



FC-750

231



FCS-750

235



FFC-750

237



HMF-750

246



MP-750

249



S-750

252

## Additional mounts

FCSC-750

236

FFL-750

238

FSS-750

243

K-750

247

L-750

248




RMX-1000

251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## 2 | Overview - $25000 \leq F_{INIT} < 50000$

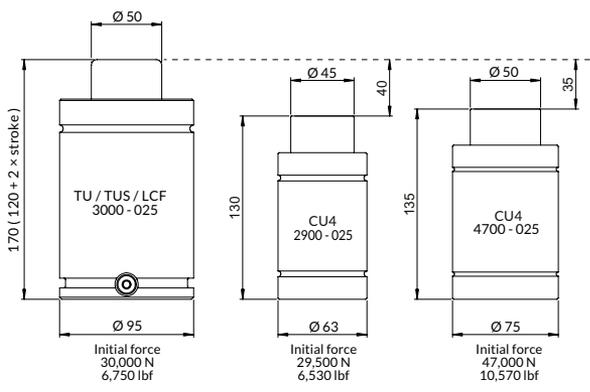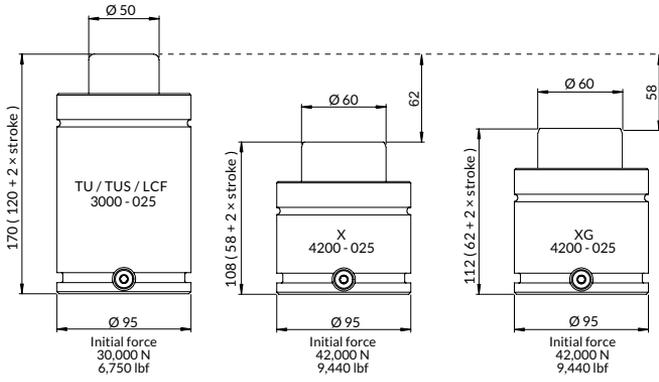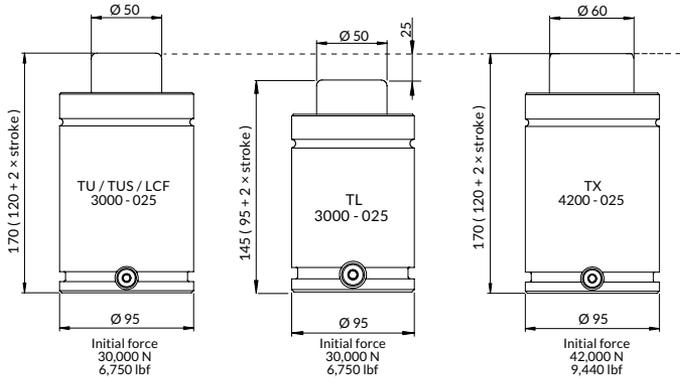

	<b>Page</b>
<b>CU4 2900</b>	<b>150</b>
<b>CU4 4700</b>	<b>152</b>
<b>X 4200</b>	<b>154</b>
<b>XG 4200</b>	<b>156</b>
<b>TX 4200</b>	<b>158</b>
<b>TL 3000</b>	<b>160</b>
<b>TU 3000</b>	<b>162</b>
<b>TUS 3000</b>	<b>164</b>
<b>LCF 3000</b>	<b>166</b>
<b>SPC 3000</b>	<b>168</b>

## The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body.


Springs with stroke lengths over 25 mm should always be attached to the tool, using a flange or the tapped holes in the bottom of the spring. We also recommend fixing of shorter stroke springs for optimal service life. As an option, this CU4 spring can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024837

Automotive standard: WDX35-62-07029xxDM, 5937667, 5937668, 5937669, 5937670, 5937671, 5937672, 5937401

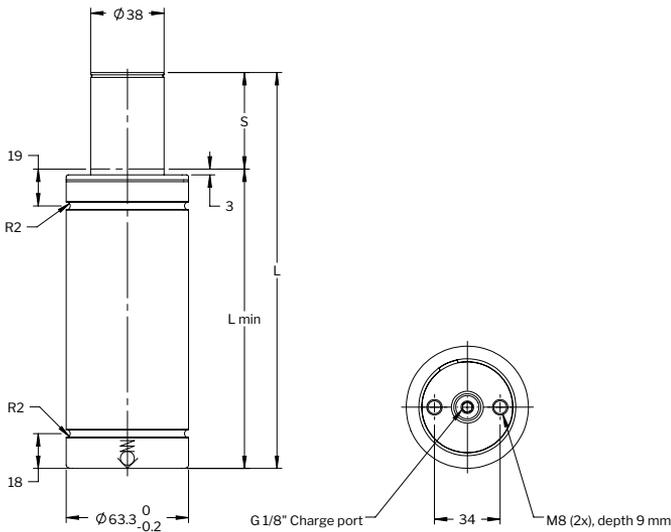

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 2900-010	10 ■	29,500	40,000	6,630	8,990	85	75	0.08	1.14
CU4 2900-016	16 ■		42,000		8,440	103	87	0.12	1.28
CU4 2900-025	25 ■		45,000		10,120	130	105	0.16	1.49
CU4 2900-032	32*		46,200		10,340	150	118	0.20	1.64
CU4 2900-040	40*		47,200		10,570	175	135	0.24	1.83
CU4 2900-050	50*		45,000		10,120	205	155	0.29	2.06
CU4 2900-065	65*		47,000		10,570	256	191	0.35	2.39

\* Should always be attached to the tool using the tapped holes in the bottom or a flange. \*\* Isothermal end force at full stroke.  
 ■ Recommended stroke length for optimal delivery.

### Mounting possibilities



**Base mount**  
SP



Body Ø  $+0.5$   
 $+1.0$   
**Drop - in**



Body Ø  $+0.5$   
 $+2.0$   
**Top mount**  
FCSC, FCS, FC

### Recommended mounts



FCSC-1500

235



XFC-1500

231



SP-2900

255

### Additional mounts

FCSCX-1500

236

FCX-1500

235

XFCJ-1500

231

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body.


Springs with stroke lengths over 25 mm should always be attached to the tool, using a flange or the tapped holes in the bottom of the spring. We also recommend fixing of shorter stroke springs for optimal service life. As an option, this CU4 spring can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024838

Automotive standard: WDX35-62-08047xxDM, Z000332033, Z000283148, Z000294883, Z000459186, 5937673, 5937674, 5937675, 5937676, 5937677, 5937678, 5937700

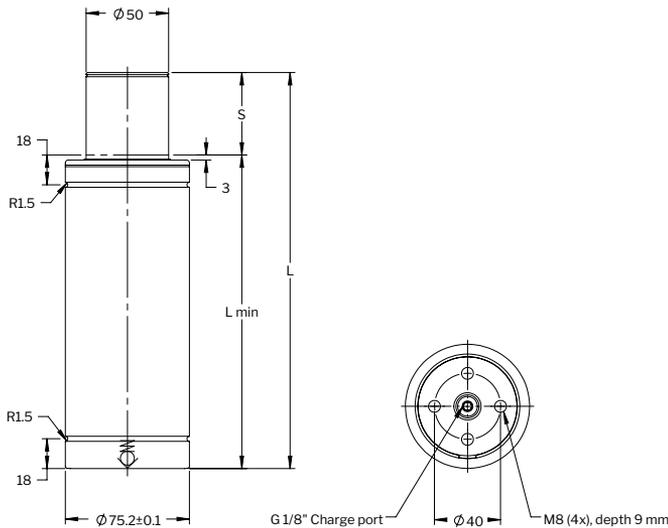

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 4700-010	10 ■	47,000	67,000	10,570	15,100	80	70	0.10	1.55
CU4 4700-016	16 ■		66,000		14,800	106	90	0.17	1.79
CU4 4700-025	25 ■		68,000		15,300	135	110	0.24	2.05
CU4 4700-032	32*		67,000		15,100	167	135	0.32	2.34
CU4 4700-040	40*		67,000		15,100	200	160	0.41	2.65
CU4 4700-050	50*		67,000		15,100	240	190	0.52	3.01
CU4 4700-065	65*		71,000		15,200	273	208	0.62	3.12

\* Should always be attached to the tool using the tapped holes in the bottom or a flange.

\*\* Isothermal end force at full stroke.

■ Recommended stroke length for optimal delivery.

### Mounting possibilities



**Base mount**  
SP, SPRM



Body Ø +0.5  
+1.0

**Drop - in**



Body Ø +0.5  
+2.0

**Top mount**  
FK



**Foot mount**  
BFCU

### Recommended mounts



BFP-4700

229



FK-1500

239



SP-4700

255

### Additional mounts

SPRM-75

257

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with two M8 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018849

Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-42000, WDX356204-42xxDMS, GMGDS 90.25.08-42, 39D997xx, B2 4005 21723xx, 04585xx, Z000414099, Z0004591xx, Z00044337x, 39-673-026x, 39-673-027x, 305077x, 305078x, 90201404397, 90201404443, 90201405563

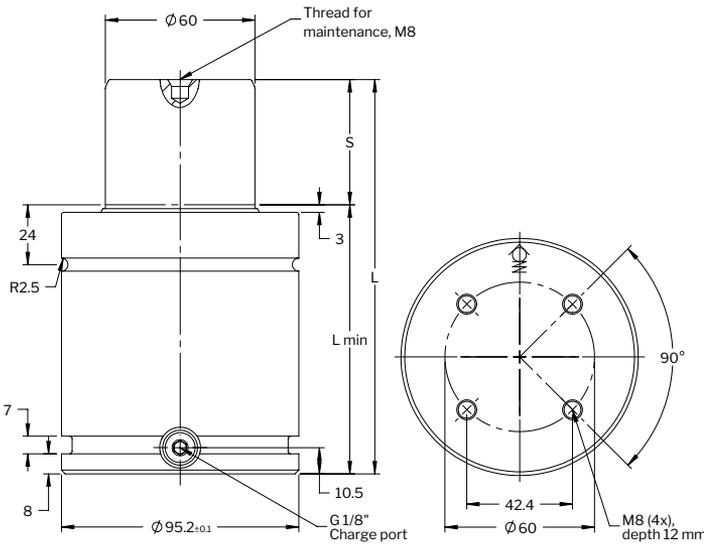

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 4200-016	16	42,000	61,700	9,440	13,870	90	74	0.15	2.81	
X 4200-019	19		63,700		14,320	96	77	0.18	2.88	
X 4200-025	25		64,800		13,670	108	83	0.26	2.96	✓
X 4200-032	32		65,300		14,455	122	90	0.30	3.13	
X 4200-038	38		65,800		14,790	134	96	0.32	3.28	✓
X 4200-050	50		67,000		15,060	158	108	0.40	3.57	✓
X 4200-063	63		67,800		15,240	184	121	0.49	4.10	✓
X 4200-075	75		68,000		15,285	208	133	0.58	4.20	
X 4200-080	80		68,600		15,420	218	138	0.61	4.32	✓
X 4200-100	100		69,100		15,535	258	158	0.74	4.81	✓
X 4200-125	125		69,600		15,645	308	183	0.91	5.42	✓

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP




Body  $\varnothing$   $+0.5$   
 $+1.0$   
**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$   
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-3000



231



FCS-3000



235



FFC-3000



237



HMF-3000



246



MP-3000



249



S-3000



252

## Additional mounts

FCSC-3000



236

FFL-3000



238

FSL-3000



241

FSS-3000



243

HM-3000



245

K-3000



247

L-3000



248

RM-3000



251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.**


These gas springs are available with forces from 3,500 N up to 66,000 N and stroke lengths between 10 and 125 mm. There is a side and bottom port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with four M8 threaded holes allows for various mounting possibilities using our standard mounts.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018849

Automotive standard: R90344053x, MES E7231 PG230-PG24D-4A, K32R0-4200, SD116391-4200

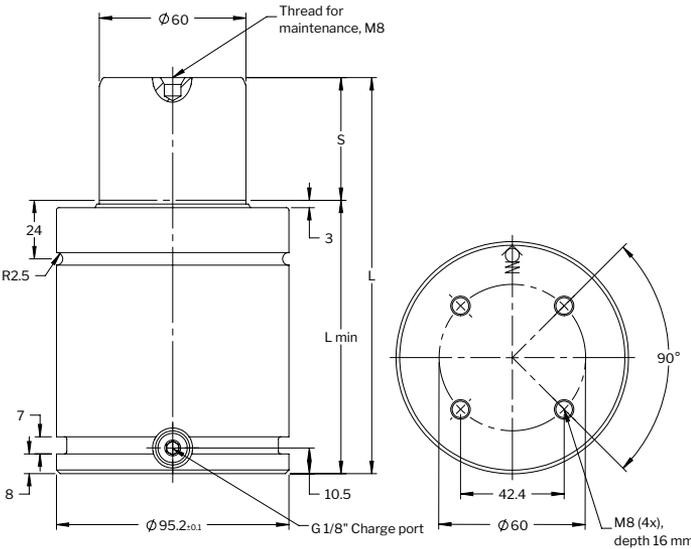

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 4200-016	16	42,000	61,700	9,440	13,870	94	78	0.15	2.81
XG 4200-019	19		63,700		14,320	100	81	0.18	2.88
XG 4200-025	25		64,800		13,670	112	87	0.26	2.96
XG 4200-032	32		65,300		14,455	126	94	0.30	3.13
XG 4200-038	38		65,800		14,790	138	100	0.32	3.28
XG 4200-050	50 ■		67,000		15,060	162	112	0.40	3.57
XG 4200-063	63 ■		67,800		15,240	188	125	0.49	4.10
XG 4200-075	75 ■		68,000		15,285	212	137	0.58	4.20
XG 4200-080	80		68,600		15,420	222	142	0.61	4.32
XG 4200-100	100 ■		69,100		15,535	262	162	0.74	4.81
XG 4200-125	125		69,600		15,645	312	187	0.91	5.42

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**




Body  $\varnothing$   $+0.5$   
 $+1.0$   
**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$   
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-3000



231



FCS-3000



235



HMF-3000



246



MP-3000



249



S-3000



252

## Additional mounts

FCSC-3000



236

FFL-3000



238

FSL-3000



241

FSS-3000



243

HM-3000



245

K-3000



247

L-3000



248

NMP-4200



250

RM-3000



251

SA-3000



253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line – Heavy Duty series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 40-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3022953

Automotive standard: VDI 3003-Blatt 4, ISO 11901-4-42000,  
GMGDS 90.25.05-30, 39D838xx, B2 4008 21750xx, 39-673-84xx, 305470x

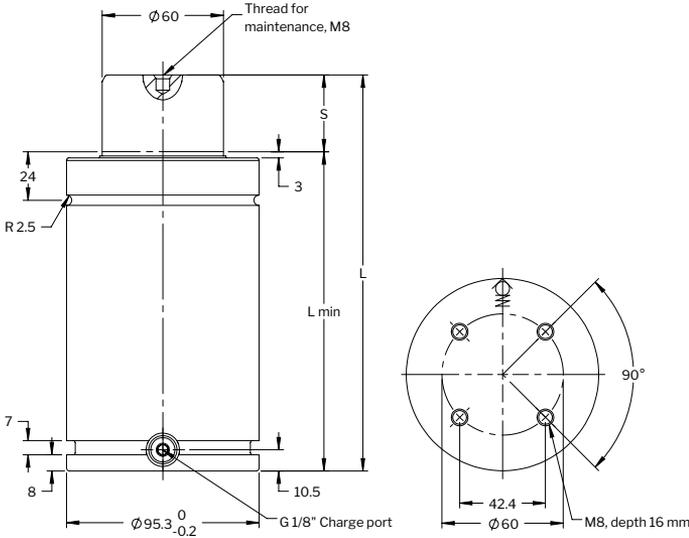

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 4200-025	25	42,000	52,100	9,440	11,725	170	145	0.43	5.08	✓
TX 4200-038	38		55,100		12,400	196	158	0.52	5.41	
TX 4200-050	50		57,200		12,875	220	170	0.60	5.71	✓
TX 4200-063	63		59,000		13,275	246	183	0.68	6.05	
TX 4200-075	75		60,300		13,575	270	195	0.76	6.35	
TX 4200-080	80		60,800		13,700	280	200	0.80	6.48	✓
TX 4200-100	100		62,500		14,050	320	220	0.93	6.99	✓
TX 4200-125	125		64,000		14,400	370	245	1.10	7.63	✓
TX 4200-150	150 ■		65,100		14,650	420	270	1.27	8.27	
TX 4200-160	160 ■		65,500		14,750	440	280	1.33	8.53	✓
TX 4200-175	175 ■		66,000		14,850	470	295	1.43	8.91	
TX 4200-200	200 ■		66,800		15,025	520	320	1.60	9.55	✓
TX 4200-250	250		67,900		15,275	620	370	1.93	11.08	✓
TX 4200-300	300		68,700		15,450	720	420	2.27	12.11	✓

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-3000

231



FCS-3000

235



FFC-3000

237



HMF-3000

246



MP-3000

249



S-3000

252

## Additional mounts

FAC-3000

230

FCSC-3000

236

FFL-3000

238

FSL-3000

241

FSS-3000

243

HM-3000

245

K-3000

247

L-3000

248

NMP-4200

250

RM-3000

251

SA-3000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TL Series ranges from model sizes 750 to 7,500, with similar features and technology as the TU series.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3024171

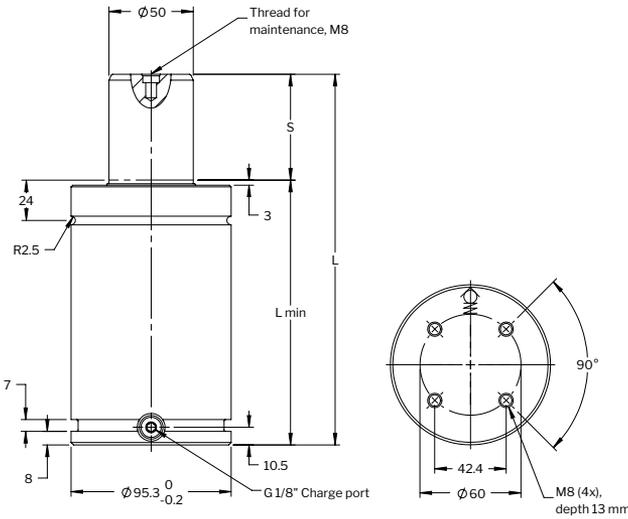

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TL 3000-013	12.5	30,000	38,700	6,750	8,710	120	107.5	0.14	4.84
TL 3000-025	25		41,800		9,400	145	120	0.21	5.24
TL 3000-038	37.5		43,500		9,770	170	132.5	0.27	5.64
TL 3000-050	50		44,400		9,980	195	145	0.33	6.03
TL 3000-063	62.5		45,100		10,130	220	157.5	0.40	6.44
TL 3000-075	75		45,500		10,230	245	170	0.46	6.83
TL 3000-080	80		45,600		10,260	255	175	0.48	7.12
TL 3000-088	87.5		45,800		10,300	270	182.5	0.52	7.24
TL 3000-100	100		46,100		10,360	295	195	0.58	7.62
TL 3000-113	112.5		46,300		10,410	320	207.5	0.65	8.02
TL 3000-125	125		46,500		10,450	345	220	0.71	8.41
TL 3000-138	137.5		46,600		10,490	370	232.5	0.77	8.84
TL 3000-150	150		46,800		10,510	395	245	0.84	9.21
TL 3000-160	160		46,900		10,530	415	255	0.89	9.53
TL 3000-175	175		47,000		10,560	445	270	0.96	10.00
TL 3000-200	200		47,100		10,590	495	295	1.09	10.79
TL 3000-225	225	47,200	10,620	545	320	1.21	11.59		
TL 3000-250	250	47,300	10,640	595	345	1.34	12.38		

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP




Drop - in  
Body  $\varnothing$   $+0.5$   
 $+1.0$



Top mount  
FC, FCS, FCSC  
Body  $\varnothing$   $+0.5$   
 $+2.0$



Foot mount  
K, FFC



Body mount  
FAC, SA, S, HM

## Recommended mounts



FC-3000



231



FCS-3000



235



FFC-3000



237



HMF-3000



246



MP-3000



249



S-3000



252

## Additional mounts

FAC-3000



230

FCSC-3000



236

FFL-3000



238

FSL-3000



241

FSS-3000



243

HM-3000



245

K-3000



247

L-3000



248

NMP-4200



250

RM-3000



251

SA-3000



253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TU line constitutes our standard line of gas springs. Sizes 250 to 10,000 conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019025

Automotive standard: VDI 3003, ISO 11901-1-30000, WDX356203-30xxDMS, GMGDS 90.25.00-30, 39D878xx, B2 4006 3881189, B2 4006 21710xx, B2 4006 33834xx, B2 4006 3286139, B2 4006 3373105, X3465900xx, X3465902xx, Z0004590xx, X3465903xx, R1000362xx, R100229769, R100229773, 39-673-53xx, N03300x, N03301x, N033020, MES E7231 PG230-PG23D-30, K32S0-3000, 99759xx, 3044189, 99759xx, 304419x, SD116322-3000, M-2401-TD-13-3000

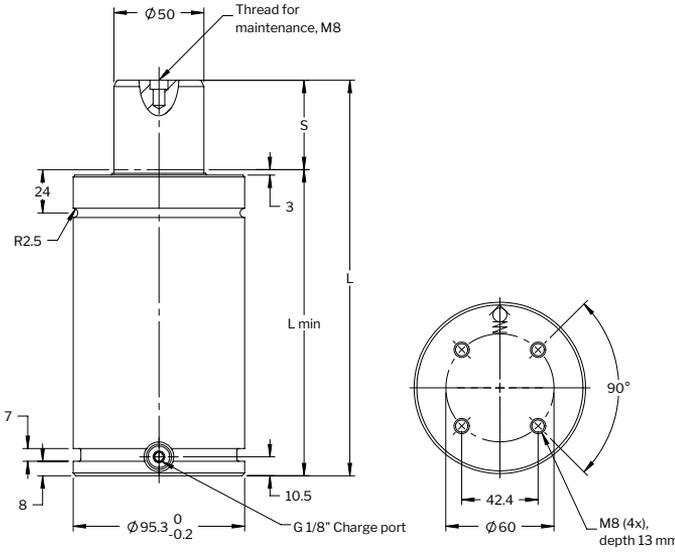

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 3000-025	25 ■	30,000	42,000	6,750	9,440	170	145	0.20	6.45	✓
TU 3000-038	38.1		43,000		9,670	196.2	158.1	0.26	6.87	✓
TU 3000-050	50 ■		44,000		9,890	220	170	0.32	7.25	✓
TU 3000-064	63.5		45,000		10,100	247	183.5	0.38	7.67	✓
TU 3000-080	80 ■		46,000		10,340	280	200	0.46	8.20	✓
TU 3000-100	100		47,000		10,570	320	220	0.56	8.83	✓
TU 3000-125	125		47,000		10,570	370	245	0.69	9.63	✓
TU 3000-160	160 ■		47,000		10,570	440	280	0.87	10.74	✓
TU 3000-175	175		48,000		10,790	470	295	0.95	11.20	✓
TU 3000-200	200		48,000		10,790	520	320	1.07	12.00	✓
TU 3000-225	225	48,000	10,790	570	345	1.20	12.80	✓		
TU 3000-250	250	48,000	10,790	620	370	1.32	13.59	✓		
TU 3000-300	300	48,000	10,790	720	420	1.57	15.18	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-3000

231



FCS-3000

235



FFC-3000

237



HMF-3000

246



MP-3000

249



S-3000

252

## Additional mounts

FAC-3000

230

FCSC-3000

236

FFL-3000

238

FSL-3000

241

FSS-3000

243

HM-3000

245

K-3000

247

L-3000

248

NMP-4200

250

RM-3000

251

SA-3000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The High Speed gas springs (TUS) have been engineered to withstand press stroke speeds to a maximum of 2 m/s, which meet the safety requirements from the French automotive manufacturer Renault.


These gas springs are available in sizes from 750 to 7,500 and dimensions that conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	2.0 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019279

Automotive standard: R903636016, R903636017, R903636018, R903636019, R903636020, R903636021, R903636022, R903636023, R903636024

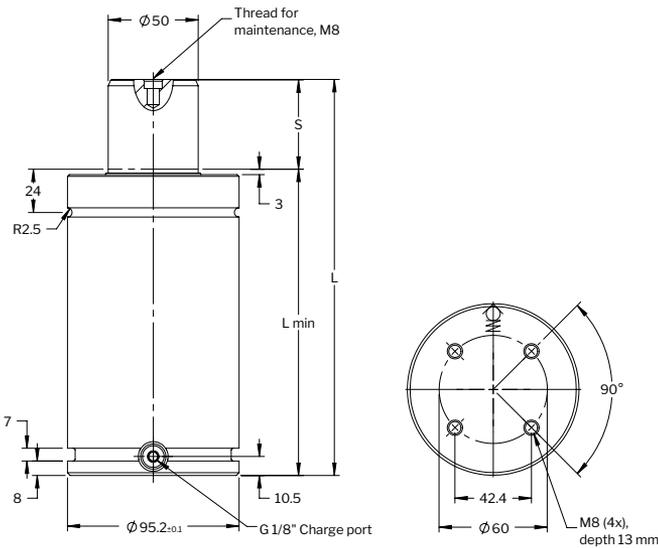

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TUS 3000-025	25	30,000	42,000	6,750	9,440	170	145	0.20	6.35
TUS 3000-038	38.1		43,000		9,670	196.2	158.1	0.26	6.75
TUS 3000-050	50		44,000		9,890	220	170	0.32	7.50
TUS 3000-064	63.5		45,000		10,100	247	183.5	0.38	7.70
TUS 3000-080	80		46,000		10,340	280	200	0.46	8.10
TUS 3000-100	100		47,000		10,570	320	220	0.56	8.85
TUS 3000-125	125		47,000		10,570	370	245	0.69	9.90
TUS 3000-160	160		47,000		10,570	440	280	0.87	10.80
TUS 3000-200	200		48,000		10,790	520	320	1.07	12.20
TUS 3000-250	250		48,000		10,790	620	370	1.32	13.70
TUS 3000-300	300		48,000		10,790	720	420	1.57	15.30

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-3000

231



FCS-3000

235



FFC-3000

237



HMF-3000

246



MP-3000

249



S-3000

252

## Additional mounts

FAC-3000

230

FCSC-3000

236

FFL-3000

238

FSL-3000

241

FSS-3000

243

HM-3000

245

K-3000

247

L-3000

248

NMP-4200

250

RM-3000

251

SA-3000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**Low Contact Force (LCF) gas springs are designed to reduce excessive shock loads, high noise levels and extreme pad bounce, all factors that lead to high press maintenance costs and noise pollution.**





## Basic information


For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	70 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit.....	3019379

Automotive standard: WDX358037-30xxDMS

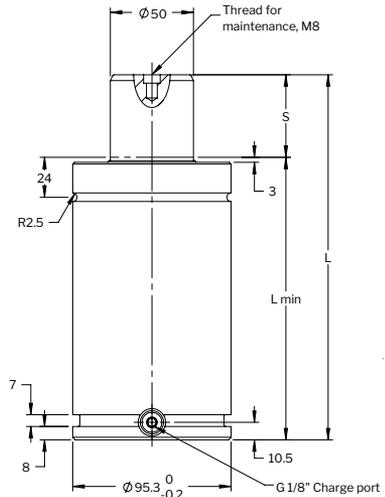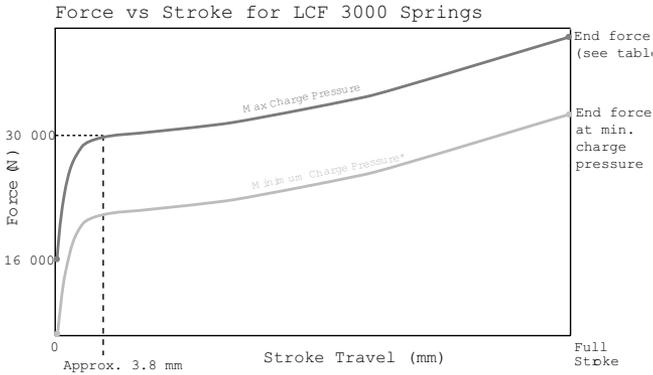

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
LCF 3000-025	25		42,000		9,440	170	145	0.20	6.35
LCF 3000-038	38.1		43,000		9,670	196.2	158.1	0.26	6.75
LCF 3000-050	50		44,000		9,890	220	170	0.32	7.50
LCF 3000-064	63.5		45,000		10,100	247	183.5	0.38	7.70
LCF 3000-080	80		46,000		10,340	280	200	0.46	8.10
LCF 3000-100	100	30,000	47,000	6,740	10,570	320	220	0.56	8.85
LCF 3000-125	125		47,000		10,570	370	245	0.69	9.90
LCF 3000-160	160		47,000		10,570	440	280	0.87	10.80
LCF 3000-200	200		48,000		10,790	520	320	1.07	12.20
LCF 3000-250	250		48,000		10,790	620	370	1.32	13.70
LCF 3000-300	300		48,000		10,790	720	420	1.57	15.30

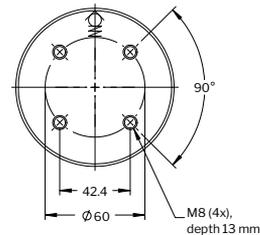

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$


**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$   
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-3000

231



FCS-3000

235



FFC-3000

237



HMF-3000

246



MP-3000

249



S-3000

252

## Additional mounts

FAC-3000

230

FCSC-3000

236

FFL-3000

238

FSS-3000

243

HM-3000

245

K-3000

247

L-3000

248

RM-3000

251

SA-3000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## Speed Control™ – SPC gas springs have been engineered to reduce or eliminate blank holder bounce, commonly associated with increased return stroke speeds from link drive presses.

SPC gas springs have inbuilt return stroke speed dampening, which decelerates the last 30 mm of the piston rod stroke to 0.4 m/s, helping to bring the blank holder to a smooth stop.

### Features


- Reduces or eliminates blank holder bounce
- Increases productivity by enabling high transfer speeds
- Easily retrofitted to existing dies
- Stroke lengths from 125 to 300 mm
- Linkable using a hose system

### Basic information


For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	See chart
Max piston rod velocity .....	1.6 m/s
Dampening length .....	≈ 30 mm
End stop speed .....	0.4 m/s
Rod surface .....	Nitrided tube
Tube surface .....	Black oxide
Repair kit .....	3421496

Automotive standard: 5937844, 5937845, 5937846, 5937847, 5937848

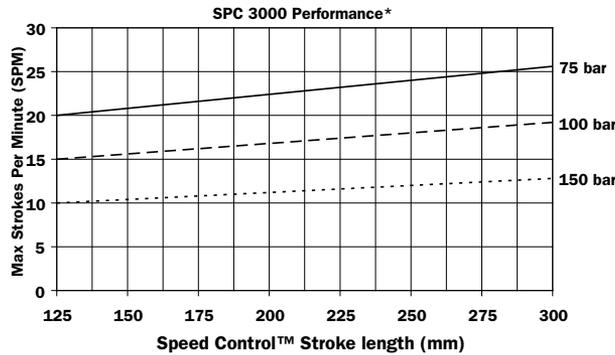


\*At 20°C ambient room temperatures with convection

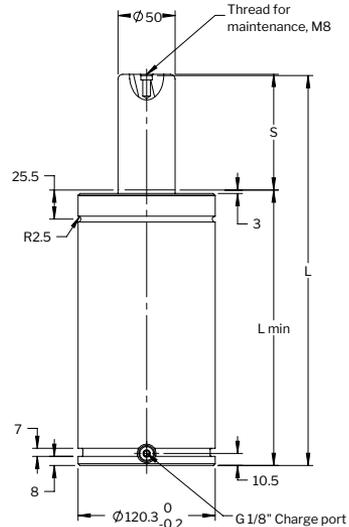

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
SPC 3000-125	125		38,000		8,550	390	265	1.15	10.64
SPC 3000-160	160		38,000		8,550	460	300	1.43	11.30
SPC 3000-200	200	30,000	38,000	6,750	8,550	540	340	1.74	12.06
SPC 3000-250	250		39,000		8,775	640	390	2.14	13.00
SPC 3000-300	300		39,000		8,775	740	440	2.53	13.95

\* Isothermal end force at full stroke.



## Mounting possibilities




**Base Mount**  
MP



Body  $\varnothing_{+0.5}^{+2.0}$   
**Top Mount**  
FC, FCS, FCSC



**Foot Mount**  
K, FFC



**Body Mount**  
FAC, SA, S

## Recommended mounts



FC-5000



FCS-5000



FFC-5000



HMF-5000



MP-5000



S-5000



## Additional mounts

FAC-5000



FCSC-5000



FFL-5000



FSS-5000



HM-5000



K-5000



L-5000



RM-5000






SA-5000



### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## 2 | Overview - $50000 \leq F_{INIT} < 75000$

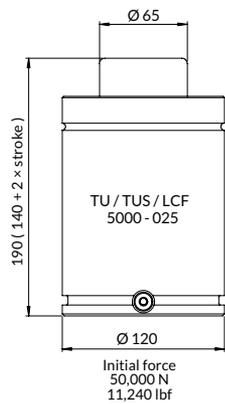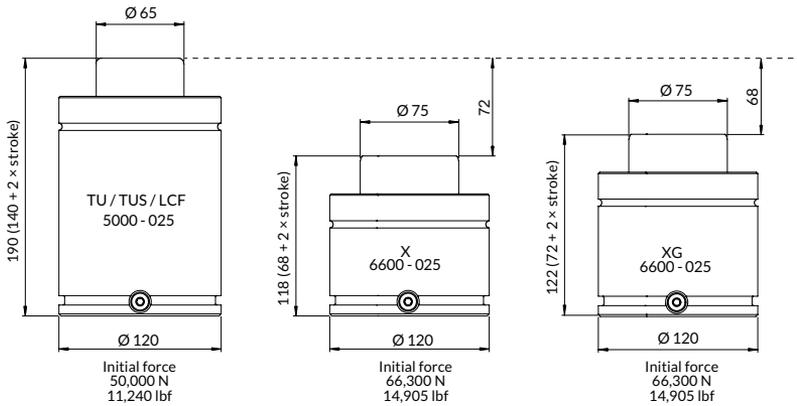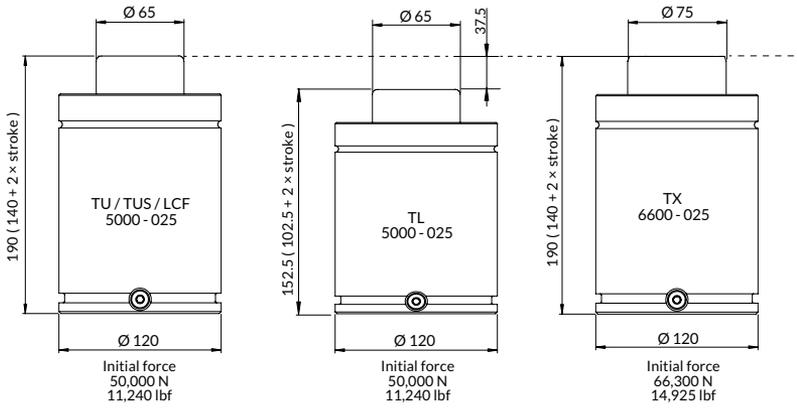

	<b>Page</b>
<b>X 6600</b>	<b>172</b>
<b>XG 6600</b>	<b>174</b>
<b>TX 6600</b>	<b>176</b>
<b>TL 5000</b>	<b>178</b>
<b>TU 5000</b>	<b>180</b>
<b>TUS 5000</b>	<b>182</b>
<b>LCF 5000</b>	<b>184</b>
<b>SPC 5000</b>	<b>186</b>

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with four M8 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019912

Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-66000, WDX356204-66xxDMS, GMGDS 90.25.08-66, 39D9977x, B2 4005 21723xx, B2 4005 21724xx, 04585xx, 39-673-027x, 39-673-028x, 305397x, 305398x, 90201404320, 90201405687, 90201405211, 90201406012

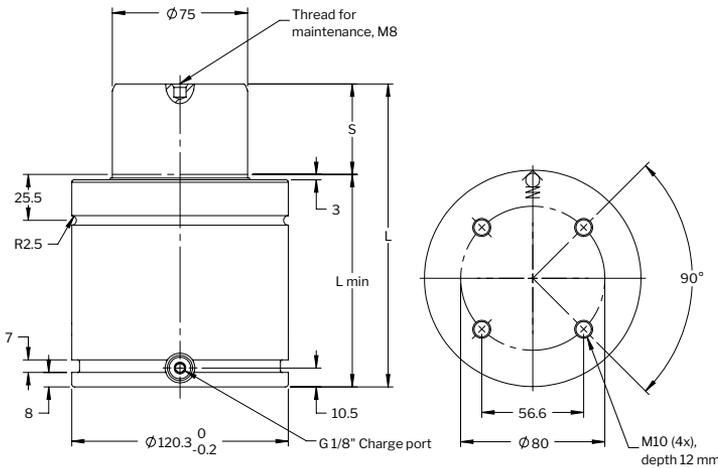

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 6600-016	16	66,300	89,000	14,905	20,010	100	84	0.32	5.00	
X 6600-019	19		91,000		20,460	106	87	0.35	5.11	
X 6600-025	25		93,900		21,110	118	93	0.42	5.34	✓
X 6600-032	32		96,100		21,605	132	100	0.49	5.61	
X 6600-038	38		98,200		22,075	144	106	0.56	5.84	✓
X 6600-050	50		100,600		22,615	168	118	0.69	6.31	✓
X 6600-063	63		102,400		23,020	194	131	0.83	6.81	✓
X 6600-075	75		103,400		23,245	218	143	0.90	7.27	
X 6600-080	80		104,100		23,400	228	148	1.01	7.46	✓
X 6600-100	100		105,400		23,700	268	168	1.23	8.23	✓
X 6600-125	125		106,500		23,940	318	193	1.50	9.19	✓

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

### Mounting possibilities



**Base mount**  
MP




Drop - in  
Body Ø +0.5  
+1.0



**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S

### Recommended mounts



FC-5000



231



FCS-5000



235



FFC-5000



237



HMF-5000



246



MP-5000



249



S-5000



252

### Additional mounts

FCSC-5000



236

FFL-5000



238

FSL-5000



241

FSS-5000



243

K-5000



247

L-5000



248

RM-5000



251

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.

These gas springs are available with forces from 3,500 N up to 66,000 N and stroke lengths between 10 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system.


An upper C-groove, lower U-groove together with four M10 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019912

Automotive standard: R9034405xx, R100679839, R100674470,  
MES E7231 PG230-PG24D-6A, K32E1-6600, SD116391-6600

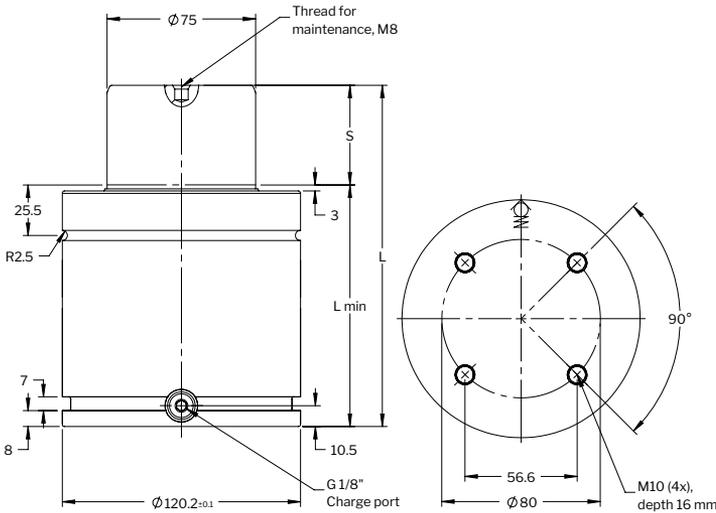

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
XG 6600-016	16	66,300	89,000	14,905	20,010	104	88	0.32	5.00
XG 6600-019	19		91,000		20,460	110	91	0.35	5.11
XG 6600-025	25		93,900		21,110	122	97	0.42	5.34
XG 6600-032	32		96,100		21,605	136	104	0.49	5.61
XG 6600-038	38		98,200		22,075	148	110	0.56	5.84
XG 6600-050	50		100,600		22,615	172	122	0.69	6.31
XG 6600-063	63		102,400		23,020	198	135	0.83	6.81
XG 6600-075	75		103,400		23,245	222	147	0.90	7.27
XG 6600-080	80		104,100		23,400	232	152	1.01	7.46
XG 6600-100	100		105,400		23,700	272	172	1.23	8.23
XG 6600-125	125		106,500		23,940	322	197	1.50	9.19

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$  +0.5  
+1.0


**Drop - in**



Body  $\varnothing$  +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S

## Recommended mounts



FC-5000

231



FCS-5000

235



FFC-5000

237



HMF-5000

246



MP-5000

249



S-5000

252

## Additional mounts

FCSC-5000

236

FFL-5000

238

FSL-5000

241

FSS-5000

243

K-5000

247

L-5000

248

RM-5000

251

SA-5000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## The Power Line – Heavy Duty series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3022954

Automotive standard: VDI 3003-Blatt 4, ISO 11901-4-66000, GMGDS 90.25.05-50, 39D838xx, B2 4008 21750xx, 39-673-85xx, 305470x, 305471x,

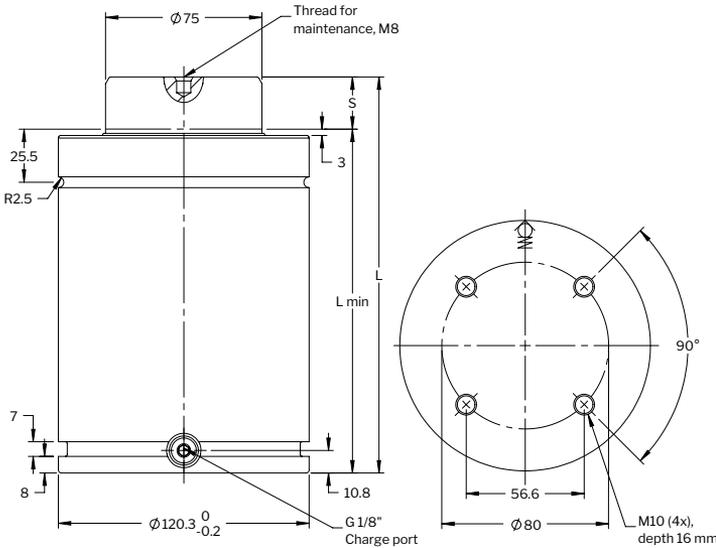

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 6600-025	25	66,300	79,500	14,925	17,900	190	165	0.73	9.28	✓
TX 6600-038	38		83,900		18,875	216	178	0.87	9.81	
TX 6600-050	50		87,000		19,600	240	190	1.00	10.30	✓
TX 6600-063	63		89,700		20,200	266	203	1.13	10.83	
TX 6600-075	75		91,800		20,650	290	215	1.26	11.32	
TX 6600-080	80		92,600		20,825	300	220	1.31	11.52	✓
TX 6600-100	100		95,100		21,500	340	240	1.53	12.33	✓
TX 6600-125	125		97,600		21,950	390	265	1.79	13.35	✓
TX 6600-150	150 ■		99,500		22,400	440	290	2.05	14.36	
TX 6600-160	160 ■		100,100		22,525	460	300	2.16	14.77	✓
TX 6600-175	175 ■		101,000		22,725	490	315	2.32	15.38	
TX 6600-200	200 ■		102,200		23,000	540	340	2.58	16.40	✓
TX 6600-250	250		104,000		23,400	640	390	3.11	18.43	✓
TX 6600-300	300		105,300		23,700	740	440	3.64	20.46	✓

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP




Drop - in  
Body  $\varnothing$   $+0.5$   
 $+1.0$



**Top mount**  
FC, FCS, FCSC  
Body  $\varnothing$   $+0.5$   
 $+2.0$



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S

## Recommended mounts



FC-5000



FCS-5000



FFC-5000



HMF-5000



MP-5000



S-5000



## Additional mounts

FAC-5000



FCSC-5000



FFL-5000



FSL-5000



FSS-5000



K-5000



L-5000



RM-5000



SA-5000



## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TL Series ranges from model sizes 750 to 7500, with similar features and technology as the TU series.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3024178

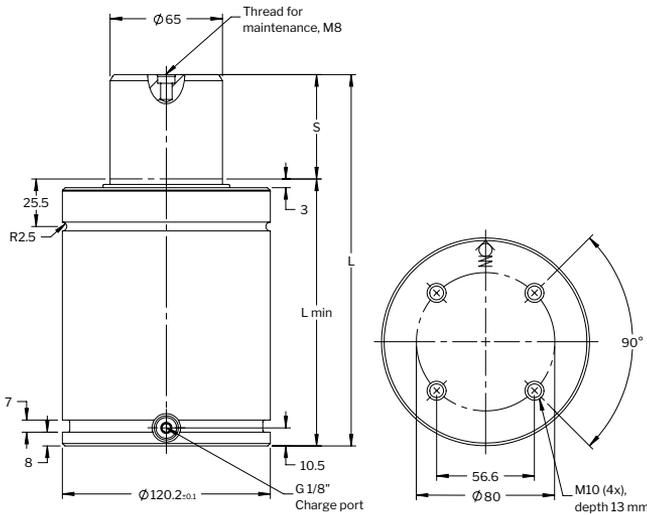

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L $\pm 0.25$	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TL 5000-025	25	50,000	80,100	11,200	18,000	152.5	127.5	0.2	9.04
TL 5000-038	37.5		81,900		18,410	177.5	140	0.3	9.70
TL 5000-050	50		82,800		18,620	202.5	152.5	0.4	10.35
TL 5000-063	62.5		83,500		18,760	227.5	165	0.5	11.01
TL 5000-075	75		83,800		18,850	252.5	177.5	0.6	11.67
TL 5000-080	80		84,000		18,870	262.5	182.5	0.7	11.93
TL 5000-088	87.5		84,100		18,920	277.5	190	0.7	12.32
TL 5000-100	100		84,400		18,970	302.5	202.5	0.8	12.98
TL 5000-113	112.5		84,500		19,000	327.5	215	0.9	13.64
TL 5000-125	125		84,700		19,040	352.5	227.5	1.0	14.30
TL 5000-138	137.5		84,800		19,070	377.5	240	1.1	14.96
TL 5000-150	150		84,900		19,090	402.5	252.5	1.2	15.62
TL 5000-160	160		85,000		19,100	422.5	262.5	1.3	16.14
TL 5000-175	175		85,100		19,130	452.5	277.5	1.4	16.94
TL 5000-200	200		85,200		19,160	502.5	302.5	1.6	18.25
TL 5000-225	225		85,300		19,180	552.5	327.5	1.8	19.57
TL 5000-250	250	85,400	19,190	602.5	352.5	2.0	20.89		

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body Ø +0.5  
+1.0


**Drop-in**



Body Ø +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-5000

231



FCS-5000

235



FFC-5000

237



HMF-5000

246



MP-5000

249



S-5000

252

## Additional mounts

FAC-5000

230

FCSC-5000

236

FFL-5000

238

FSL-5000

241

FSS-5000

243

K-5000

247

L-5000

248

RM-5000

251

SA-5000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TU line constitutes our standard line of gas springs. Sizes 250 to 10,000 conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018876

Automotive standard: VDI 3003, ISO 11901-1-50000, WDX356203-50xxDMS, GMGDS 90.25.00-50, 39D878xx, B2 4005 21680xx, B2 4006 21710xx, 03323xx, Z000410553, X346590027, Z00049215x, Z000301877, Z000239128, Z000134786, R1000362xx, X346590834, R100229774, R100228812, 39-673-54xx, N03500x, N03501x, N03501x, N03501x, N03501x, N035020, MES E7231 PG230-PG23D-5A, K32S0-5000, 304419x, 997597x, 9975980, SD116322-5000, M-2401-TD-19-5000

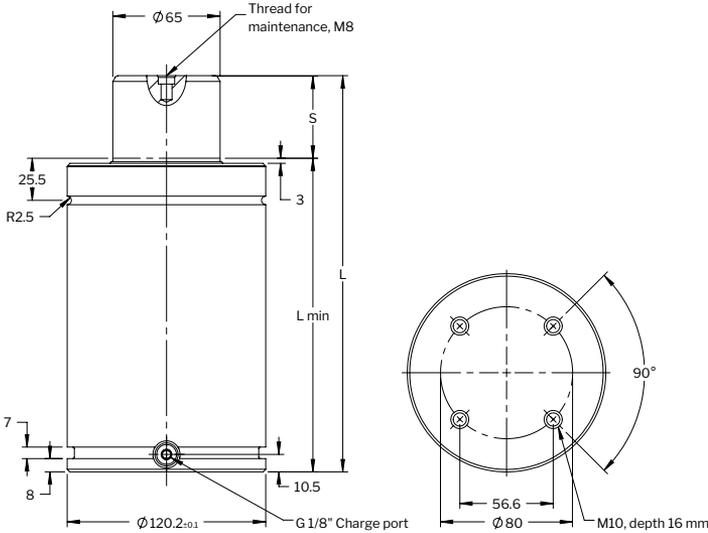

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L $\pm 0.25$	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 5000-025	25	50,000	71,000	11,240	15,960	190	165	0.32	12.40	✓
TU 5000-038	38.1		75,000		16,860	216.2	178.1	0.42	13.10	
TU 5000-050	50		77,000		17,310	240	190	0.51	13.70	✓
TU 5000-064	63.5		80,000		17,990	267	203.5	0.60	14.40	
TU 5000-080	80 ■		81,000		18,210	300	220	0.73	15.30	✓
TU 5000-100	100 ■		82,000		18,430	340	240	0.89	16.40	✓
TU 5000-125	125 ■		82,000		18,430	390	265	1.09	17.70	✓
TU 5000-160	160 ■		83,000		18,660	460	300	1.36	19.60	✓
TU 5000-175	175		84,000		18,880	490	315	1.49	20.40	
TU 5000-200	200 ■		84,000		18,880	540	340	1.68	21.70	✓
TU 5000-225	225	84,000	18,880	590	365	1.88	22.10			
TU 5000-250	250	84,000	18,880	640	390	2.07	22.40	✓		
TU 5000-300	300	84,000	18,880	740	440	2.46	27.10	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body Ø +0.5  
+1.0


**Drop-in**



Body Ø +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

## Recommended mounts



FC-5000

231



FCS-5000

235



FFC-5000

237



HMF-5000

246



MP-5000

249



S-5000

252

## Additional mounts

FAC-5000

230

FCSC-5000

236

FFL-5000

238

FSL-5000

241

FSS-5000

243

K-5000

247

L-5000

248

RM-5000

251

SA-5000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The High Speed gas springs (TUS) have been engineered to withstand press stroke speeds to a maximum of 2 m/s, which meet the safety requirements from the French automotive manufacturer Renault.


These gas springs are available in sizes from 750 to 7500 and dimensions that conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	2.0 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019280

Automotive standard: R903636025, R903636026, R903636027, R903636028, R903636029, R903636030, R903636031, R903636032, R903636033

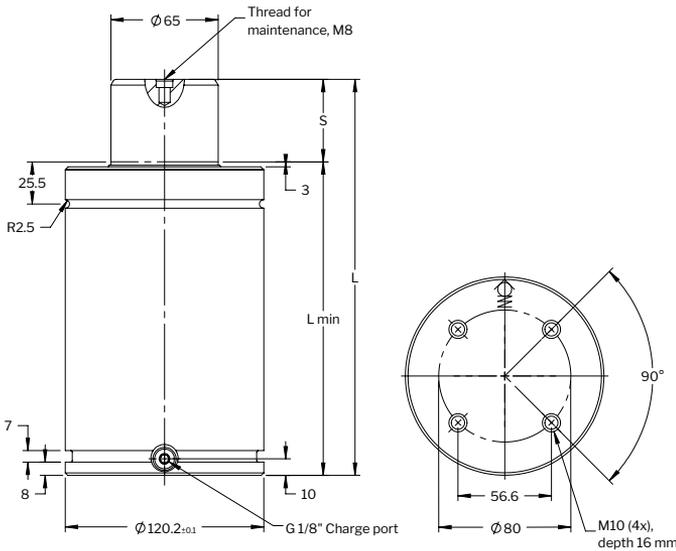

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TUS 5000-025	25	50,000	71,000	11,240	15,960	190	165	0.32	12.00
TUS 5000-038	38.1		75,000		16,860	216.2	178.1	0.42	12.65
TUS 5000-050	50		77,000		17,310	240	190	0.51	13.30
TUS 5000-064	63.5		80,000		17,990	267	203.5	0.60	14.46
TUS 5000-080	80		81,000		18,210	300	220	0.73	15.05
TUS 5000-100	100		82,000		18,430	340	240	0.89	16.15
TUS 5000-125	125		82,000		18,430	390	265	1.09	16.96
TUS 5000-160	160		83,000		18,660	460	300	1.36	19.40
TUS 5000-200	200		84,000		18,880	540	340	1.68	20.70
TUS 5000-250	250		84,000		18,880	640	390	2.07	22.40
TUS 5000-300	300	84,000	18,880	740	440	2.46	24.66		

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP




Drop - in  
Body  $\varnothing$   $+0.5$   
 $+1.0$



Top mount  
FC, FCS, FCSC  
Body  $\varnothing$   $+0.5$   
 $+2.0$



Foot mount  
K, FFC



Body mount  
FAC, SA, S, HM

## Recommended mounts



FC-5000

231



FCS-5000

235



FFC-5000

237



HMF-5000

246



MP-5000

249



S-5000

252

## Additional mounts

FAC-5000

230

FCSC-5000

236

FFL-5000

238

FSL-5000

241

FSS-5000

243

K-5000

247

L-5000

248

RM-5000

251

SA-5000

253

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**Low Contact Force (LCF) gas springs are designed to reduce excessive shock loads, high noise levels and extreme pad bounce, all factors that lead to high press maintenance costs and noise pollution.**





## Basic information

For general information see "About gas springs".


Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	75 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit.....	3019380

Automotive standard: WDX358037-50xxDMS

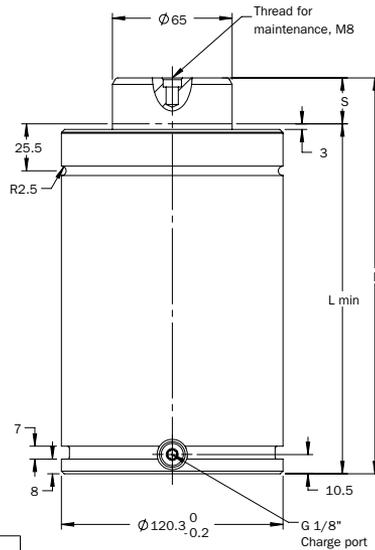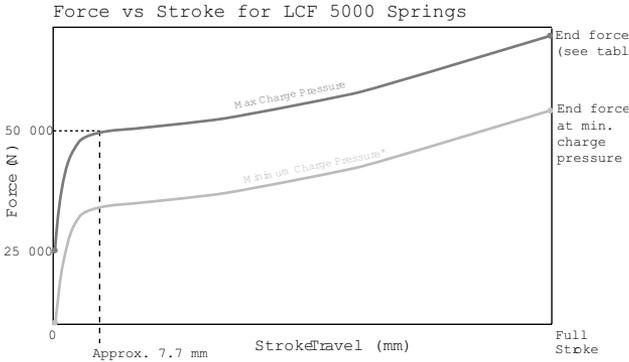

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
LCF 5000-025	25		71,000		15,960	190	165	0.32	12.00
LCF 5000-038	38.1		75,000		16,860	216.2	178.1	0.42	12.65
LCF 5000-050	50		77,000		17,310	240	190	0.51	13.30
LCF 5000-064	63.5		80,000		17,990	267	203.5	0.60	14.46
LCF 5000-080	80		81,000		18,210	300	220	0.73	15.05
LCF 5000-100	100	50,000	82,000	11,240	18,430	340	240	0.89	16.15
LCF 5000-125	125		82,000		18,430	390	265	1.09	16.96
LCF 5000-160	160		83,000		18,660	460	300	1.36	19.40
LCF 5000-200	200		84,000		18,880	540	340	1.68	20.70
LCF 5000-250	250		84,000		18,880	640	390	2.07	22.40
LCF 5000-300	300		84,000		18,880	740	440	2.46	24.66

\* Isothermal end force at full stroke.

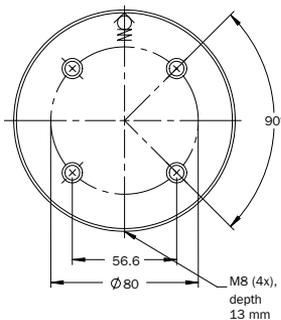

### Mounting possibilities



**Base mount**  
MP



Body Ø +0.5  
+1.0


**Drop-in**



Body Ø +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

### Recommended mounts



FC-5000

231



FCS-5000

235



FFC-5000

237



HMF-5000

246



MP-5000

249



S-5000

252

### Additional mounts

FAC-5000

230

FCSC-5000

236

FFL-5000

238

FSL-5000

241

FSS-5000

243

HM-750

245

K-5000

247

L-5000

248

RM-5000

251

SA-5000

253

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

## Speed Control™ – SPC gas springs have been engineered to reduce or eliminate blank holder bounce, commonly associated with increased return stroke speeds from link drive presses.

SPC gas springs have inbuilt return stroke speed dampening, which decelerates the last 30 mm of the piston rod stroke to 0.4 m/s, helping to bring the blank holder to a smooth stop.

### Features


- Reduces or eliminates blank holder bounce
- Increases productivity by enabling high transfer speeds
- Easily retrofitted to existing dies
- Stroke lengths from 125 to 300 mm
- Linkable using a hose system

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	See chart
Max piston rod velocity .....	1.6 m/s
Dampening length .....	≈ 30 mm
End stop speed .....	0.4 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3421497



Automotive standard: 5937849, 5937850, 5937851, 5937852, 5937853

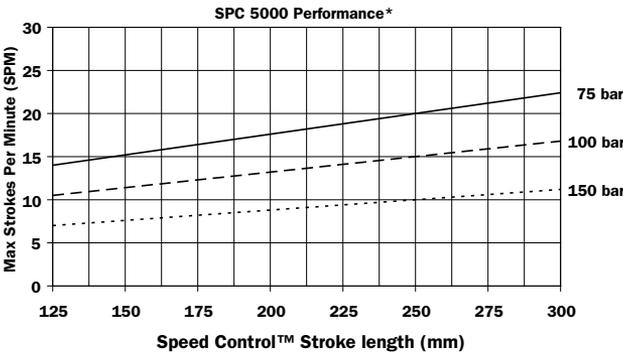


\*At 20°C ambient room temperatures with free convection

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
SPC 5000-125	125		64,000		14,400	405	280	1.90	26.35
SPC 5000-160	160		65,000		14,625	475	315	2.33	28.75
SPC 5000-200	200	50,000	66,000	11,250	14,850	555	355	2.82	31.50
SPC 5000-250	250		66,000		14,850	655	405	3.43	34.93
SPC 5000-300	300		66,000		14,850	755	455	4.05	38.37


\* Isothermal end force at full stroke.

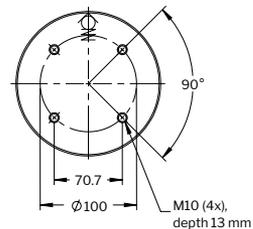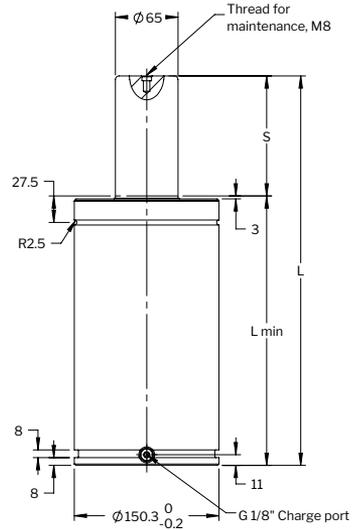


### Mounting possibilities

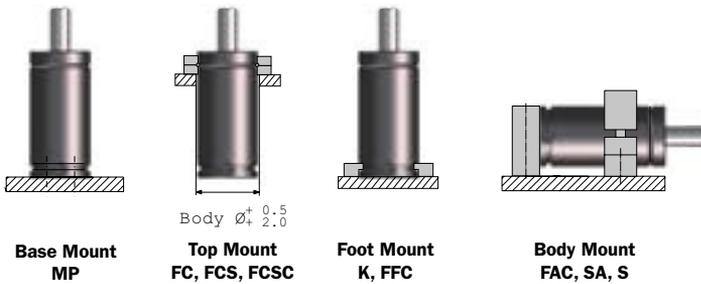

### Recommended mounts


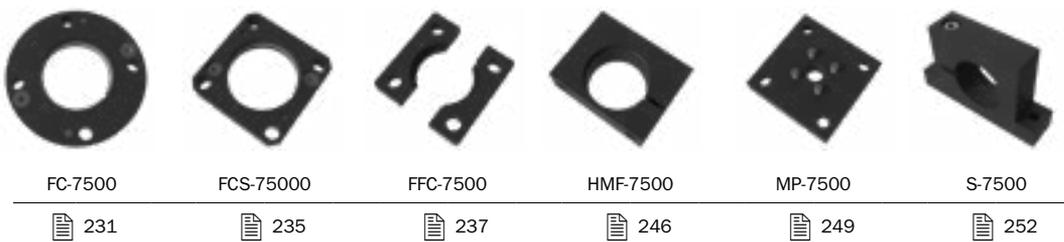


### Additional mounts



### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

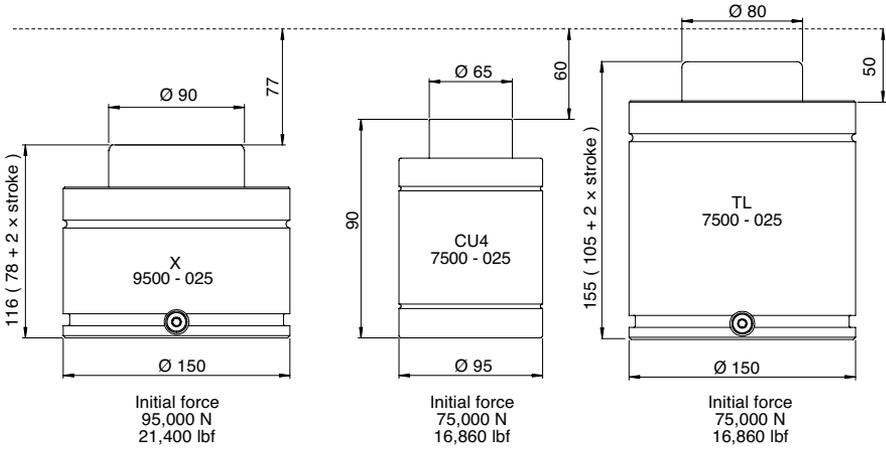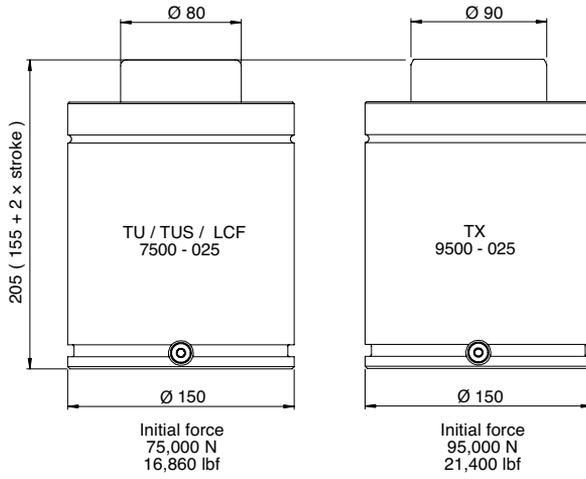

	<b>Page</b>
<b>CU4 7500</b>	<b>190</b>
<b>X 9500</b>	<b>192</b>
<b>TX 9500</b>	<b>194</b>
<b>TL 7500</b>	<b>196</b>
<b>TU 7500</b>	<b>198</b>
<b>TUS 7500</b>	<b>200</b>
<b>LCF 7500</b>	<b>202</b>

The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body. The maximum frequency for the spring is 100 strokes/minute.

As an option, the CU4 spring can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024839

Automotive standard: WDX35-62-08075xxDM, Z000459187, 5937679, 5937680, 5937681, 5937682, 5937683, 5937684, 5937685

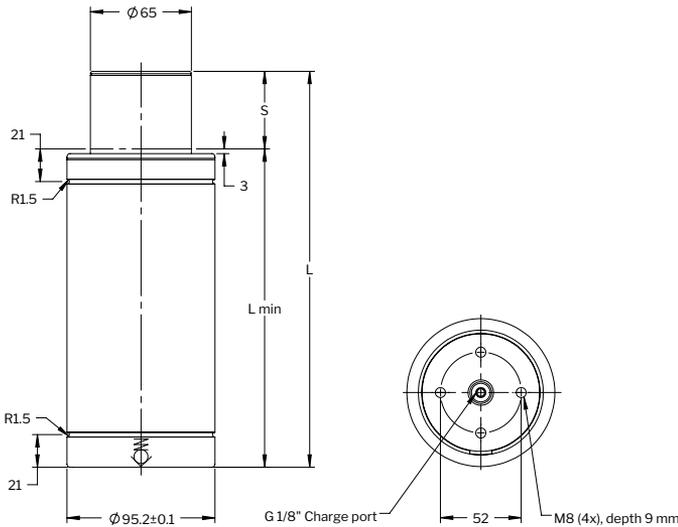

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 7500-010	10 ■	75,000	98,500	16,860	22,143	90	80	0.18	2.86
CU4 7500-016	16 ■		100,000		22,480	116	100	0.30	3.22
CU4 7500-025	25 ■		104,000		23,380	145	120	0.41	3.61
CU4 7500-032	32*		102,000		22,930	182	150	0.57	4.14
CU4 7500-040	40*		104,000		23,380	210	170	0.68	4.52
CU4 7500-050	50*		103,000		23,155	255	205	0.87	5.15
CU4 7500-065	65*		111,000		24,953	279	214	1.00	5.23

\* Should always be attached to the tool using the tapped holes in the bottom or a flange.

\*\* Isothermal end force at full stroke.

■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
SP, SPRM



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FK



**Foot mount**  
BFP

## Recommended mounts



BFP-7500

 229



FK-3000

 239



SP-7500

 255

## Additional mounts

SPRM-95

 257

## Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths between 7 and 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with four M10 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3020614

Automotive standard: VDI 3003-Blatt 3, ISO 11901-3-95000, WDX356204-95xxDMS, GMGDS 90.25.08-95, 39D997xx, B2 4005 21724xx, 04585xx, 39-673-028x, 39-673-0290, MES E7231 PG230-PG24D-9A, 305398x, 305399x, SD116391-9500

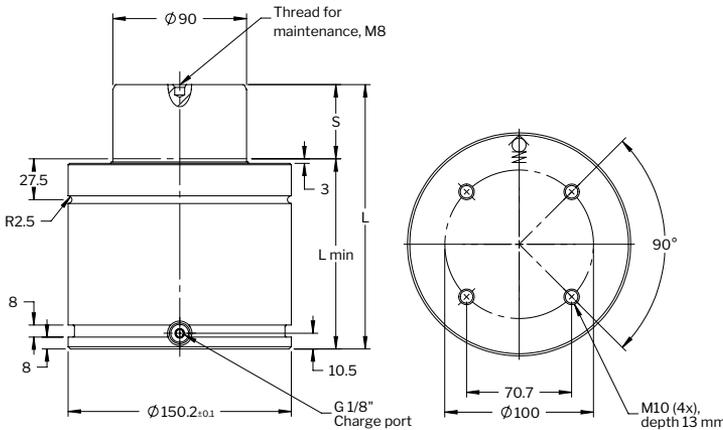

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 9500-019	19	95,000	135,000	21,400	30,370	116	97	0.49	9.86	
X 9500-025	25		139,000		31,270	128	103	0.58	10.23	✓
X 9500-032	32		142,000		31,945	142	110	0.70	10.67	
X 9500-038	38		143,000		32,170	154	116	0.80	11.04	✓
X 9500-050	50		146,000		32,845	178	128	0.99	11.79	✓
X 9500-063	63		148,000		33,295	204	141	1.20	12.60	✓
X 9500-075	75		149,000		33,520	228	153	1.39	13.35	
X 9500-080	80		150,000		33,745	238	158	1.47	13.66	✓
X 9500-100	100		151,000		33,970	278	178	1.79	14.91	✓
X 9500-125	125		152,000		34,195	328	203	2.20	16.47	✓

\* Isothermal end force at full stroke.    ■ Recommended stroke length for optimal delivery.

### Mounting possibilities



**Base mount**  
MP




**Drop - in**



**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
S

### Recommended mounts



FC-7500

231



FCS-7500

235



FFC-7500

237



HMF-7500

246



MP-7500

249



S-7500

252

### Additional mounts

FCSC-7500

236

FFL-7500

238

FSL-7500

241

FSS-7500

243

K-7500

247

L-7500

248

RM-7500

251

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line – Heavy Duty series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see “About gas springs”.

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 30-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3022901

Automotive standard: VDI 3003-Blatt 4, ISO 11901-4-95000, GMGDS 90.25.05-75, 39D838xx, B2 4008 21750xx, 39-673-86xx, 305471x, 305472x

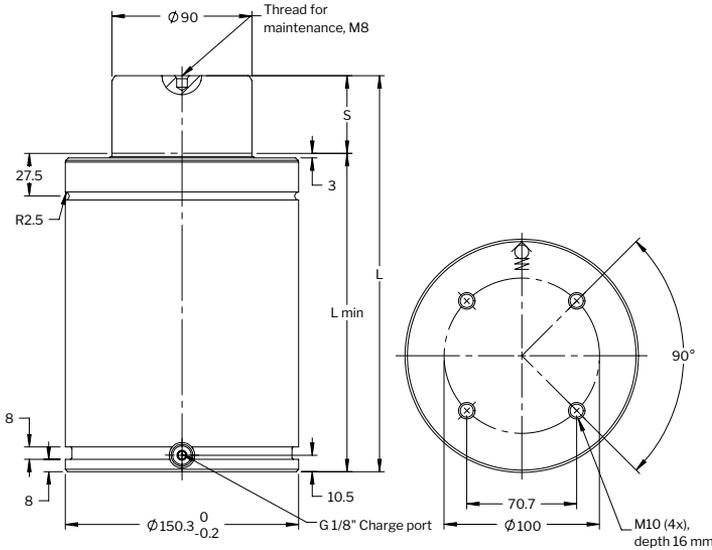

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 9500-025	25 ■	95,000	113,200	21,400	25,500	205	180	1.09	16.86	√
TX 9500-038	38 ■		119,000		26,800	231	193	1.30	17.70	
TX 9500-050	50 ■		123,300		27,730	255	205	1.49	18.48	√
TX 9500-063	63 ■		127,000		28,550	281	218	1.69	19.32	
TX 9500-075	75 ■		129,700		29,200	305	230	1.88	20.10	
TX 9500-080	80 ■		130,800		29,430	315	235	1.96	20.42	√
TX 9500-100	100 ■		134,300		30,200	355	255	2.28	31.72	√
TX 9500-125	125 ■		137,600		31,000	405	280	2.67	23.35	√
TX 9500-150	150 ■		140,200		31,530	455	305	3.07	24.97	
TX 9500-160	160 ■		141,000		31,730	475	315	3.23	25.62	√
TX 9500-175	175 ■		142,200		31,990	505	330	3.47	26.59	
TX 9500-200	200 ■		143,800		32,360	555	355	3.86	28.21	√
TX 9500-250	250 ■		146,300		32,930	655	405	4.65	31.46	√
TX 9500-300	300 ■		148,200		33,340	755	455	5.44	34.70	√

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop-in**




Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
S

## Recommended mounts



FC-7500

231



FCS-7500

235



FFC-7500

237



HMF-7500

246



MP-7500

249



S-7500

252

## Additional mounts

FCSC-7500

236

FFL-7500

238

FSL-7500

241

FSS-7500

243

K-7500

247

L-7500

248

RM-7500

251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TL Series ranges from model sizes 750 to 7500, with the same features and technology as the TU series.



## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3025027

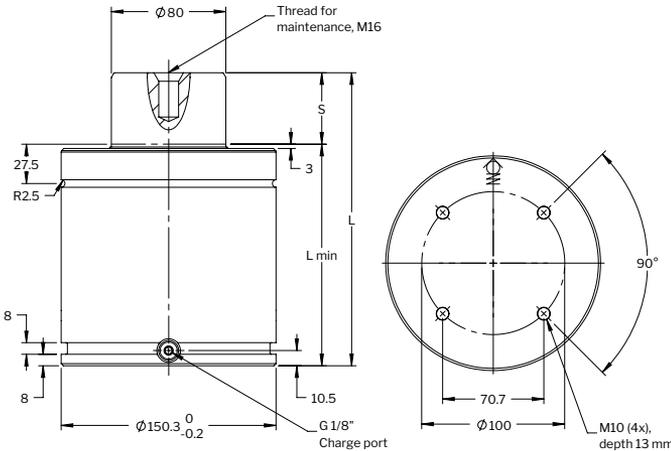

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L $\pm 0.25$	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TL 7500-025	25	75,000	99,900	16,900	22,450	155	130	0.6	13.6
TL 7500-038	37.5		104,100		23,400	180	142.5	0.7	14.5
TL 7500-050	50		106,800		24,010	205	155	0.9	15.4
TL 7500-063	62.5		108,700		24,440	230	167.5	1.0	16.3
TL 7500-075	75		110,100		24,750	255	180	1.3	17.2
TL 7500-080	80		115,600		25,990	265	185	1.4	17.5
TL 7500-088	87.5		111,200		25,000	280	192.5	1.6	18.0
TL 7500-100	100		112,000		25,180	305	205	1.8	18.9
TL 7500-113	112.5		112,700		25,340	330	217.5	1.9	19.8
TL 7500-125	125		113,300		25,470	355	230	2.1	20.7
TL 7500-138	137.5		113,700		25,560	380	242.5	2.3	21.6
TL 7500-150	150		114,100		25,650	405	255	2.4	22.5
TL 7500-160	160		114,400		25,720	425	265	2.6	23.2
TL 7500-175	175		114,800		25,810	455	280	3.0	24.3
TL 7500-200	200		115,300		25,920	505	305	3.3	26.1
TL 7500-225	225		115,700		26,010	555	330	3.3	27.8
TL 7500-250	250	116,000	26,080	605	355	3.6	29.6		

\* Isothermal end force at full stroke.

### Mounting possibilities



**Base mount**  
MP




Body  $\varnothing$   $+0.5$   
 $+1.0$   
**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$   
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
FAC, SA, S, HM

### Recommended mounts



FC-7500

231



FCS-7500

235



FFC-7500

237



HMF-7500

246



MP-7500

249



S-7500

252

### Additional mounts

FFL-7500

238

FSL-7500

241

FSS-7500

243

K-7500

247

L-7500

248

RM-750

251

### Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.


The TU line constitutes our standard line of gas springs. Sizes 250 to 1000 conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3018877

Automotive standard: VDI 3003, ISO 11901-1-75000, WDX356203-75xxDMS, GMGDS 90.25.00-75, 39D878xx, B2 4005 21680xx, B2 4006 21710xx, 03323xx, Z00049238x, Z000487363, N000741822, N000701263, R1001753xx, R1001607xx, R10022977x, 39-673-55xx, N03750x, N03751x, N037520, MES E7231 PG230-PG23D-7A, 304419x, 3044200, SD116322-7500

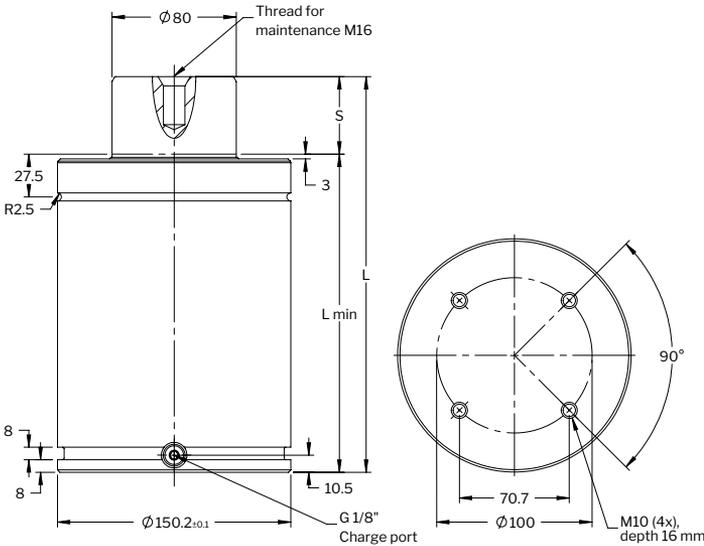

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 7500-025	25	75,000	105,000	16,860	23,600	205	180	0.51	20.30	✓
TU 7500-038	38.1		110,000		24,730	231.2	193.1	0.67	21.40	
TU 7500-050	50		113,000		25,400	255	205	0.81	22.40	✓
TU 7500-064	63.5		115,000		25,850	282	218.5	0.98	23.50	
TU 7500-080	80 ■		117,000		26,300	315	235	1.18	24.80	✓
TU 7500-100	100 ■		119,000		26,750	355	255	1.43	26.50	✓
TU 7500-125	125 ■		121,000		27,200	405	280	1.74	28.50	✓
TU 7500-160	160 ■		122,000		27,430	475	315	2.17	31.40	✓
TU 7500-175	175		123,000		27,650	505	330	2.06	32.60	
TU 7500-200	200 ■		123,000		27,650	555	355	2.66	34.70	✓
TU 7500-225	225		124,000		27,880	605	380	2.96	36.80	
TU 7500-250	250		124,000		27,880	655	405	3.27	38.80	✓
TU 7500-300	300	124,000	27,880	755	455	3.88	42.90	✓		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP




Body  $\varnothing$  +0.5  
+1.0  
**Drop-in**



Body  $\varnothing$  +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
S

## Recommended mounts



FC-7500

231



FCS-7500

235



FFC-7500

237



HMF-7500

246



MP-7500

249



S-7500

252

## Additional mounts

FCSC-7500

236

FFL-7500

238

FSL-7500

241

FSS-7500

243

K-7500

247

L-7500

248

RM-7500

251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

The High Speed gas springs (TUS) have been engineered to withstand press stroke speeds to a maximum of 2 m/s, which meet the safety requirements from the French automotive manufacturer Renault.


These gas springs are available in sizes from 750 to 7500 and dimensions that conform to the ISO 11901 gas spring standard.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	2.0 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019281

Automotive standard: R903636034, R903636035, R903636036, R903636037, R903636038, R903636039, R903636040, R903636041, R903636042

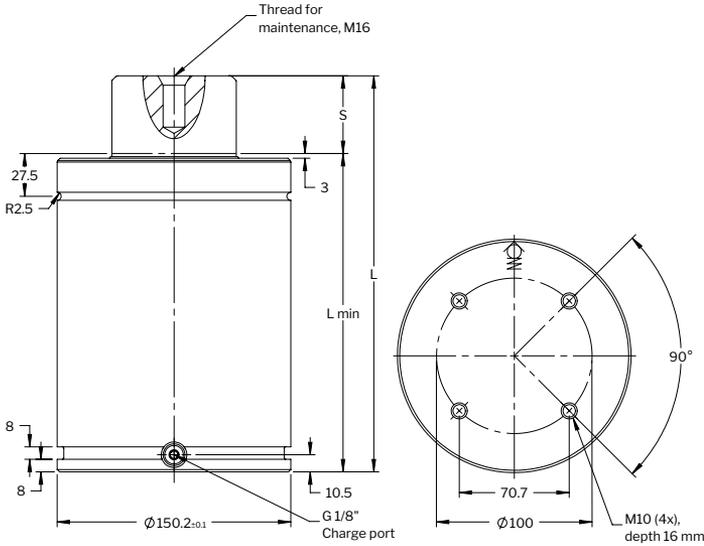

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L $\pm 0.25$	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TUS 7500-025	25	75,000	105,000	16,860	23,600	205	180	0.51	19.40
TUS 7500-038	38.1		110,000		24,730	231.2	193.1	0.67	20.47
TUS 7500-050	50		113,000		25,400	255	205	0.81	21.25
TUS 7500-064	63.5		115,000		25,850	282	218.5	0.98	22.56
TUS 7500-080	80		117,000		26,300	315	235	1.18	23.91
TUS 7500-100	100		119,000		26,750	355	255	1.43	25.56
TUS 7500-125	125		121,000		27,200	405	280	1.74	27.61
TUS 7500-160	160		122,000		27,430	475	315	2.17	30.48
TUS 7500-200	200		123,000		27,650	555	355	2.66	33.76
TUS 7500-250	250		124,000		27,880	655	405	3.27	37.87
TUS 7500-300	300		124,000		27,880	755	455	3.88	41.97

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP




Body  $\varnothing$  +0.5  
+1.0  
**Drop-in**



Body  $\varnothing$  +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
S

## Recommended mounts



FC-7500

231



FCS-7500

235



FFC-7500

237



HMF-7500

246



MP-7500

249



S-7500

252

## Additional mounts

FCSC-7500

236

FFL-7500

238

FSL-7500

241

FSS-7500

243

K-7500

247

L-7500

248

RM-7500

251

## Note!

For dimensions on all mount options, refer to "Mounts" in chapter 3.

**Low Contact Force (LCF) gas springs are designed to reduce excessive shock loads, high noise levels and extreme pad bounce, all factors that lead to high press maintenance costs and noise pollution.**





## Basic information


For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	85 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recom max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit.....	3019381

Automotive standard: WDX358037-75xxDMS

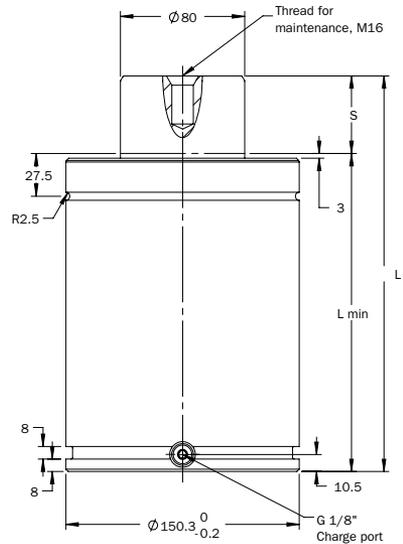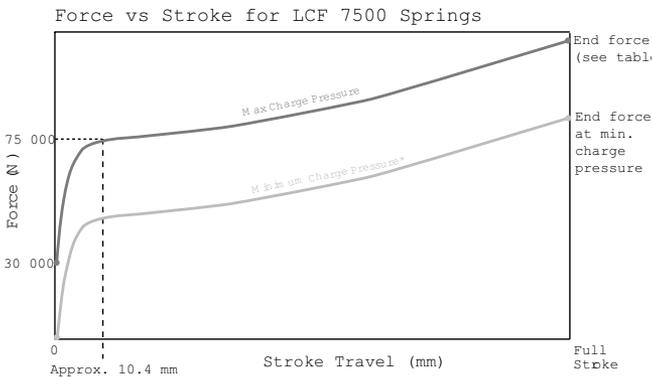

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
LCF 7500-025	25		105,000		23,600	205	180	0.51	19.40
LCF 7500-038	38.1		110,000		24,730	231.2	193.1	0.67	20.47
LCF 7500-050	50		113,000		25,400	255	205	0.81	21.25
LCF 7500-064	63.5		115,000		25,850	282	218.5	0.98	22.56
LCF 7500-080	80		117,000		26,300	315	235	1.18	23.91
LCF 7500-100	100	75,000	119,000	16,860	26,750	355	255	1.43	25.56
LCF 7500-125	125		121,000		27,200	405	280	1.74	27.61
LCF 7500-160	160		122,000		27,430	475	315	2.17	30.48
LCF 7500-200	200		123,000		27,650	555	355	2.66	33.76
LCF 7500-250	250		124,000		27,880	655	405	3.27	37.87
LCF 7500-300	300		124,000		27,880	755	455	3.88	41.97

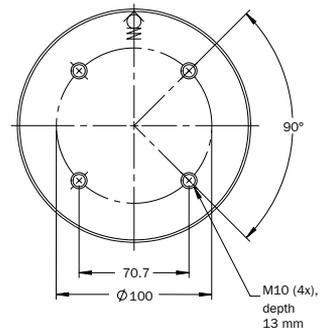

\* Isothermal end force at full stroke.

### Mounting possibilities



**Base mount**  
MP



Body Ø +0.5  
+1.0


**Drop - in**



Body Ø +0.5  
+2.0  
**Top mount**  
FC, FCS, FCSC



**Foot mount**  
K, FFC



**Body mount**  
S

### Recommended mounts



FC-7500

231



FCS-7500

235



FFC-7500

237



HMF-7500

246



MP-7500

249



S-7500

252

### Additional mounts

FCSC-7500

236

FFL-7500

238

FSL-7500

241

FSS-7500

243

K-7500

247

L-7500

248



RM-5000

251

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## 2 | Overview - $F_{INIT} \geq 100000$

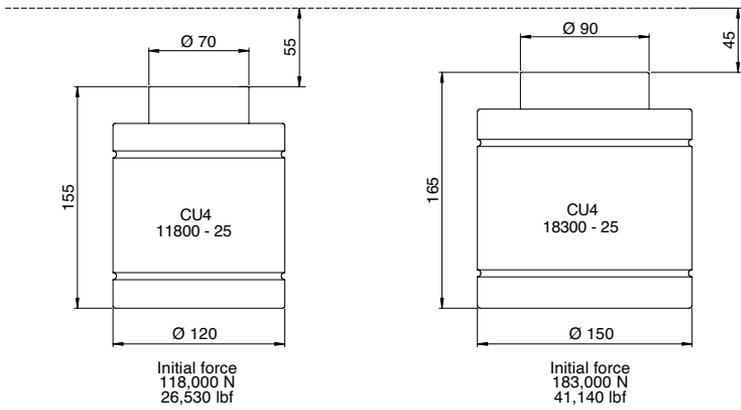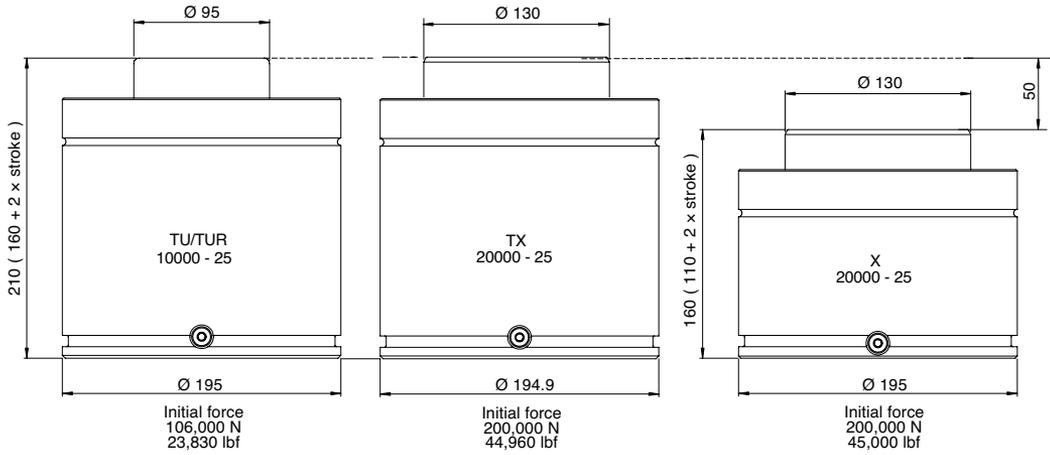

	<b>Page</b>
<b>CU4 11800</b>	<b>206</b>
<b>CU4 18300</b>	<b>208</b>
<b>TU 10000</b>	<b>210</b>
<b>TUR 10000</b>	<b>212</b>
<b>X 20000</b>	<b>214</b>
<b>TX 20000</b>	<b>216</b>

The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body. The maximum frequency for the spring is 100 strokes/minute.


As an option, the CU4 spring can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024840

Automotive standard: WDX35-62-09118xxDM, 5937686, 5937687, 5937688, 5937689, 5937690, 5937691, 5937692

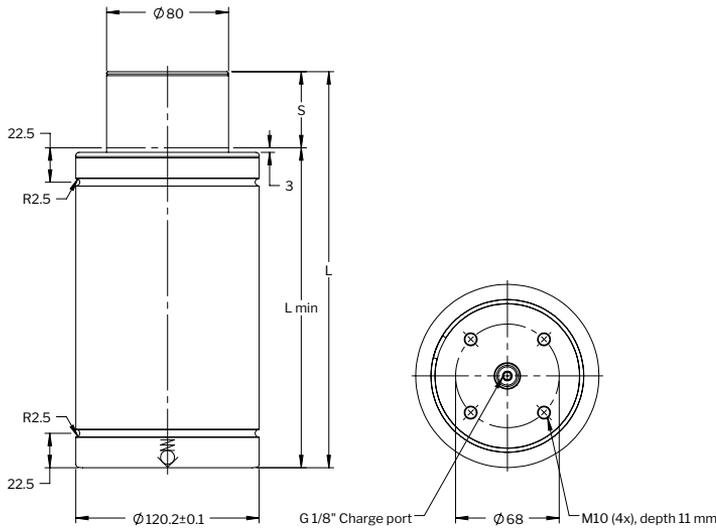

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 11800-010	10 ■	118,000	150,000	26,530	33,700	100	90	0.33	4.95
CU4 11800-016	16 ■		153,000		34,400	126	110	0.50	5.55
CU4 11800-025	25 ■		160,000		36,000	155	130	0.68	6.17
CU4 11800-032	32*		165,000		37,100	187	155	0.88	6.90
CU4 11800-040	40*		160,000		36,000	220	180	1.00	7.65
CU4 11800-050	50*		161,000		36,200	260	210	1.35	8.55
CU4 11800-065	65*		163,000		36,600	320	255	1.90	9.56

\* Should always be attached to the tool using the tapped holes in the bottom or a flange.

\*\* Isothermal end force at full stroke.

■ Recommended stroke length for optimal delivery.

**Mounting possibilities**



**Base mount**  
SP, SPRM



Body Ø +0.5  
+1.0

**Drop - in**



Body Ø +0.5  
+2.0

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
BFCU

**Recommended mounts**



BFCU-11800

229



FC-5000

231



FCS-5000

235



SP-11800

255

**Additional mounts**

FCSC-5000

236

SPRM-120

257

**Note!**

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The CU4 gas spring is a very compact bore sealed gas spring with impressive force in a compact body. The maximum frequency for the spring is 100 strokes/minute.


As an option, the CU4 spring can be delivered with a Side Port plate (SP) for applications where a sideport is needed (e.g., for use in hose systems).

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 80-100
Max piston rod velocity .....	0.8 m/s
Rod surface .....	Nitrided
Tube surface .....	Nitrided
Repair kit .....	3024841

Automotive standard: WDX35-62-09183xxDM, 5937693, 5937694, 5937695, 5937696, 5937697, 5937698, 5937699

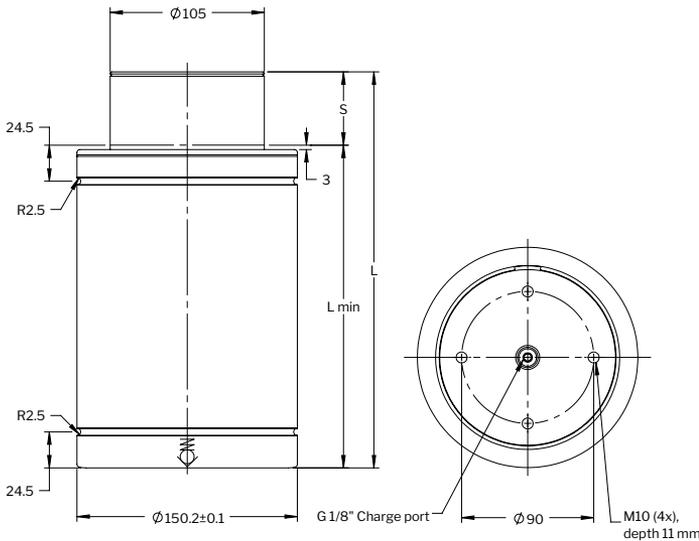

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force**	Initial	End force**				
CU4 18300-010	10 ■	183,000	227,000	41,140	51,000	110	100	0.56	8.78
CU4 18300-016	16 ■		233,000		52,400	136	120	0.84	9.72
CU4 18300-025	25 ■		244,000		54,900	165	140	1.13	10.71
CU4 18300-032	32*		244,000		54,900	197	165	1.45	11.88
CU4 18300-040	40*		244,000		54,900	235	195	1.86	13.28
CU4 18300-050	50*		248,000		55,800	270	220	2.19	14.50
CU4 18300-065	65*		253,000		56,900	323	258	2.90	16.30

\* Should always be attached to the tool using the tapped holes in the bottom or a flange. \*\* at full stroke.

■ Recommended stroke length for optimal delivery.

### Mounting possibilities



**Base mount**  
SP, SPRM



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FC, FCS, FCSC



**Foot mount**  
BFCU

### Recommended mounts



BFCU-18300

229



FC-7500

231



FCS-7500

235



SP-18300

255

### Additional mounts

FCSC-7500

236

SPRM-150

257

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The TU line constitutes our standard line of gas springs. Sizes 250 to 10000 conform to the ISO 11901 gas spring standard.




## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019037

Automotive standard: VDI 3003, ISO 11901-1-100000, GMGDS 90.25.00-100, 39D878xx, 03441xx, R1001607xx, R10022977x, 39-673-56xx, N03990x, N03991x, N039920, 305396x, 305397x

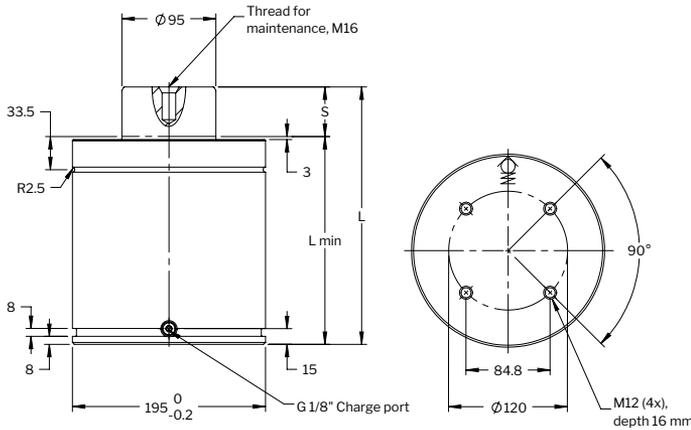

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TU 10000-025	25	106,000	138,000	23,830	31,020	210	185	0.87	35.90	
TU 10000-038	38.1		143,000		32,150	236.2	198.1	1.13	37.60	
TU 10000-050	50		147,000		33,050	260	210	1.37	39.20	√
TU 10000-064	63.5		150,000		33,720	287	223.5	1.64	41.00	
TU 10000-080	80 ■		152,000		34,170	320	240	1.98	43.20	√
TU 10000-100	100 ■		156,000		35,070	360	260	2.38	45.80	√
TU 10000-125	125 ■		157,000		35,300	410	285	2.88	49.10	√
TU 10000-160	160 ■		158,000		35,520	480	320	3.59	53.70	√
TU 10000-200	200 ■		160,000		35,970	560	360	4.39	59.00	√
TU 10000-250	250		160,000		35,970	660	410	5.40	65.60	√
TU 10000-300	300	160,000	35,970	760	460	6.40	72.20	√		

\* Isothermal end force at full stroke. ■ Recommended stroke length for optimal delivery.

### Mounting possibilities



**Base mount**  
**MP**



Body Ø +0.5  
+1.0

**Drop - in**



Body Ø +0.5  
+2.0

**Top mount**  
**FCS**



**Foot mount**  
**K, FFC**

### Recommended mounts




FCS-10000

 235



FFC-10000

 237



MP-10000

 249

### Additional mounts

K-10000

 247

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

The TUR 10000 gas spring conforms to the ISO 11901-1 and the Renault automotive gas spring standards. In full compliance with the Renault requirements, it features an over-stroke protection system.


For sizes 750 up to 7500, please refer to the TUS High Speed gas springs.

## Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3019282

Automotive standard: GMGDS 90.50.11, R100160733, R100160734, R100160735, R100160736, R100160738, R100160739, R100160741, R100229777, R100229778

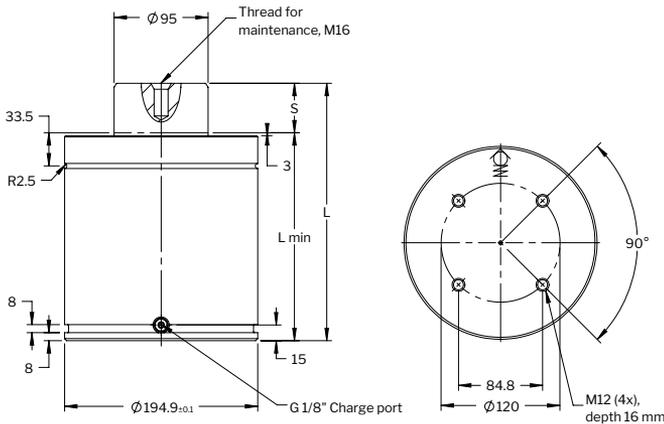

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)
		Initial	End force*	Initial	End force*				
TUR 10000-025	25	106,000	138,000	23,830	31,020	210	185	1.0	34.7
TUR 10000-038	38.1		143,000		32,150	236.2	198.1	1.2	36.4
TUR 10000-050	50		147,000		33,050	260	210	1.5	39.2
TUR 10000-064	63.5		150,000		33,720	287	223.5	1.8	39.8
TUR 10000-080	80		152,000		34,170	320	240	2.1	41.9
TUR 10000-100	100		156,000		35,070	360	260	2.5	44.6
TUR 10000-125	125		157,000		35,300	410	285	3.0	47.9
TUR 10000-160	160		158,000		35,520	480	320	3.7	53.4
TUR 10000-200	200		160,000		35,970	560	360	4.5	59.0
TUR 10000-250	250		160,000		35,970	660	410	5.5	65.5
TUR 10000-300	300	160,000	35,970	760	460	6.5	72.1		

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $\begin{matrix} +0.5 \\ +1.0 \end{matrix}$

**Drop - in**



Body  $\varnothing$   $\begin{matrix} +0.5 \\ +2.0 \end{matrix}$

**Top mount**  
FCS



**Foot mount**  
K, FFC

## Recommended mounts




FCS-10000

 235



FFC-10000

 237



MP-10000

 249

## Additional mounts

K-10000

 247

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line Series includes our shortest and most powerful piston rod sealed gas springs, offering impressive force in a very compact format.


These gas springs are available with forces from 1,700 N up to 200,000 N and stroke lengths up to 125 mm. There is a side port for gas charging that can also be used to connect to a hose system. An upper C-groove, lower U-groove together with four M12 threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-40
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3022902

Automotive standard: ISO 11901-3-200000, GMGDS 90.25.08-199, 39-673-029x, 305467x, 305468x

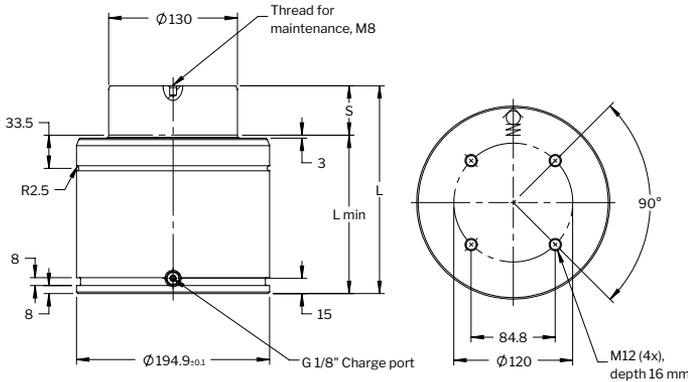

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
X 20000-019	19	200,000	259,000	45,000	58,200	148	129	1.21	21.50	✓
X 20000-025	25		270,000		60,750	160	135	1.38	22.16	
X 20000-032	32		280,000		63,000	174	142	1.59	22.92	
X 20000-038	38		287,000		64,600	186	148	1.77	23.57	
X 20000-050	50		298,000		67,000	210	160	2.12	24.87	
X 20000-063	63		307,000		69,100	236	173	2.50	26.28	
X 20000-075	75		313,000		70,500	260	185	2.85	27.59	
X 20000-080	80		315,000		70,900	270	190	3.00	28.13	
X 20000-100	100		323,000		72,700	310	210	3.58	30.30	
X 20000-125	125		330,000		74,250	360	235	4.31	33.02	

\* Isothermal end force at full stroke.    ■ Recommended stroke length for optimal delivery.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$   $+0.5$   
 $+1.0$

**Drop - in**



Body  $\varnothing$   $+0.5$   
 $+2.0$

**Top mount**  
FCS



**Foot mount**  
K, FFC

## Recommended mounts




FCS-10000

 235



FFC-10000

 237



MP-10000

 249

## Additional mounts

K-10000

 247

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

## The Power Line – Heavy Duty series is a crossover between the standard TU Series and the Power Line X Series.


These gas springs are available with forces from 7,400 N up to 200,000 N and stroke lengths up to 300 mm. There is an optional bottom port model for hose/base plate connection available upon request, contact us for more details. An upper C-groove, lower U-groove and bottom threaded holes allows for various mounting possibilities using our standard mounts.

### Basic information

For general information see "About gas springs".

Pressure medium .....	Nitrogen
Max. charging pressure (at 20°C) .....	150 bar
Min. charging pressure (at 20°C) .....	25 bar
Operating temperature .....	0 to +80°C
Force increase by temperature .....	0.3%/°C
Recommended max strokes/min (at 20°C) .....	~ 15-100
Max piston rod velocity .....	1.6 m/s
Rod surface .....	Nitrided
Tube surface .....	Black oxide
Repair kit .....	3026204

Automotive standard: GMGDS 90.25.05-100, 39-673-87xx, ISO 11901-4-200000

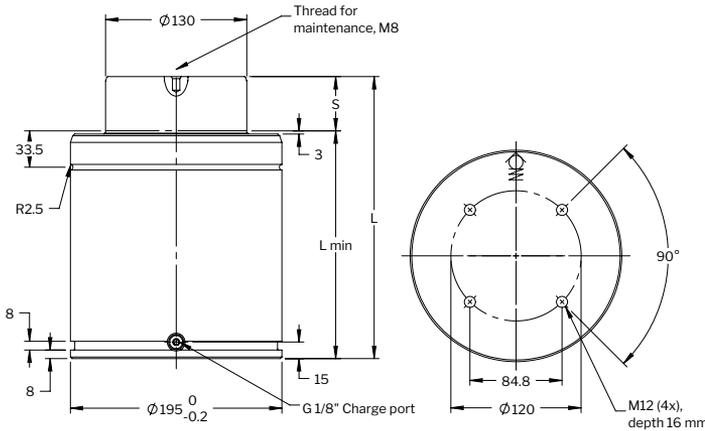

Order No.	S stroke	Force in N at 150 bar/+20°C		Force in lbf at 150 bar/+20°C		L ±0.25	L min.	Gas vol. (l)	Weight (kg)	ISO
		Initial	End force*	Initial	End force*					
TX 20000-025	25		242,000		54,404	210	185	2.03	28.20	
TX 20000-038	38		256,400		57,640	236	198	2.41	29.57	
TX 20000-050	50		266,800		59,980	260	210	2.77	30.83	✓
TX 20000-063	63		276,000		62,048	286	223	3.15	32.20	
TX 20000-075	75		283,100		63,644	310	235	3.51	33.46	
TX 20000-080	80		285,700		64,228	320	240	3.66	33.98	✓
TX 20000-100	100	200,000	294,600	44,960	66,229	360	260	4.25	36.09	✓
TX 20000-125	125		303,100		68,140	410	285	5.00	38.71	✓
TX 20000-150	150		309,700		69,624	460	310	5.74	41.34	
TX 20000-160	160		312,000		70,140	480	320	6.04	42.39	
TX 20000-175	175		315,000		70,815	510	335	6.48	43.97	
TX 20000-200	200		319,000		71,714	560	360	7.23	46.60	✓
TX 20000-250	250		325,600		73,198	660	410	8.71	51.85	✓
TX 20000-300	300		330,600		72,322	760	460	10.20	57.11	✓

\* Isothermal end force at full stroke.

## Mounting possibilities



**Base mount**  
MP



Body  $\varnothing$  +0.5  
+1.0

**Drop - in**



Body  $\varnothing$  +0.5  
+2.0

**Top mount**  
FCS



**Foot mount**  
K, FFC

## Recommended mounts



FCS-10000

 235



FFC-10000

 237



MP-10000

 249


## Additional mounts








K-10000

 247

### Note!

For dimensions on all mount options, refer to “Mounts” in chapter 3.

		Page
<b>Mounting Guidelines</b>		<b>220</b>
<b>BF</b>		<b>228</b>
<b>BFCU</b>		<b>229</b>
<b>FAC</b>		<b>230</b>
<b>FC</b>		<b>231</b>
<b>FC (R)</b>		<b>232</b>
<b>FCR</b>		<b>233</b>
<b>FCR ISO</b>		<b>234</b>
<b>FCS</b>		<b>235</b>
<b>FCSC</b>		<b>236</b>
<b>FFC</b>		<b>237</b>
<b>FFL</b>		<b>238</b>
<b>FK</b>		<b>239</b>
<b>FRM</b>		<b>240</b>
<b>FSL</b>		<b>241</b>

		Page
<b>FSS</b>		<b>243</b>
<b>FTM</b>		<b>244</b>
<b>HM</b>		<b>245</b>
<b>HMF</b>		<b>246</b>
<b>K-LUG</b>		<b>247</b>
<b>L</b>		<b>248</b>
<b>MP</b>		<b>249</b>
<b>NMP</b>		<b>250</b>
<b>RM</b>		<b>251</b>
<b>S</b>		<b>252</b>
<b>SA</b>		<b>253</b>
<b>SM</b>		<b>254</b>
<b>SP</b>		<b>255</b>
<b>SPCX</b>		<b>256</b>
<b>SPRM</b>		<b>257</b>

## 3 | Mounting Guidelines

**KALLER gas springs are engineered for use in modern day, metal stamping dies and plastic moulding tools. Over the years, KALLER has developed a wide range of mounting methods for the gas springs. The following is intended as a reminder of the correct procedure when using these various mounting methods.**

### Mounting method overview

Generally speaking, KALLER gas spring cylinders are machined with two external grooves. The C-groove being located towards the cylinder opening and a U-groove or second C-groove located just above its base. These grooves allow various flange mounts to be attached. It is then the flange mount that is clamped to the tool using mounting screws of a suitable length, property class and torque setting (see next page for more details). Only use mounts manufactured or approved by KALLER.



#### Drop-In

The gas spring is dropped into a flat bottomed pocket within the die.



#### Base mount

The gas spring's base threaded holes are used to mount the gas spring directly to the tool or indirectly via a base mounting plate.



#### Foot mount

A flange mount is used to clamp the base of the gas spring to the tool using the gas spring's lower U or C groove.



#### Top mount

A flange mount is first attached to the gas spring's upper C-groove before being mounted into a hole in the die.



#### Thread mount

A section of the gas spring's cylinder, which has an external thread (either cylinder body or base stud), is used to install the gas spring in the die. In some cases with an additional lock nut or flange mount.



#### Body mount

The body mounts are attached to the gas spring to allow it to be installed in any orientation within the die, from vertically upright through to vertically upside down.

## Mounting screws

When mounting the gas spring directly to the tool or via a flange mount, it is important to observe the following recommendations in order to prevent the gas spring or its mounting accessories from working loose into the tool.



### Recommendations:

Screws should have a free length (clamping length) of 2 to 4 times their thread diameter and a thread depth of at least 1.5 times their thread diameter in steel and 2 times their thread diameter in cast iron. If the free length cannot be achieved in any other way, the screw holes should be countersunk (see below). Please note that the specifications in automotive standards may differ. Always use a torque wrench to apply the appropriate torque for the class of screws used.


Thread	Torque (for screw class 8.8 according to ISO 898-1)
M6	10 Nm
M8	24 Nm
M10	45 Nm
M12	80 Nm
M16	160-200 Nm

\*Screws of material grade better than or equal to grade 8.8 according to ISO 898-1 must be used.

## For all types of flange mounting using mounting screws:

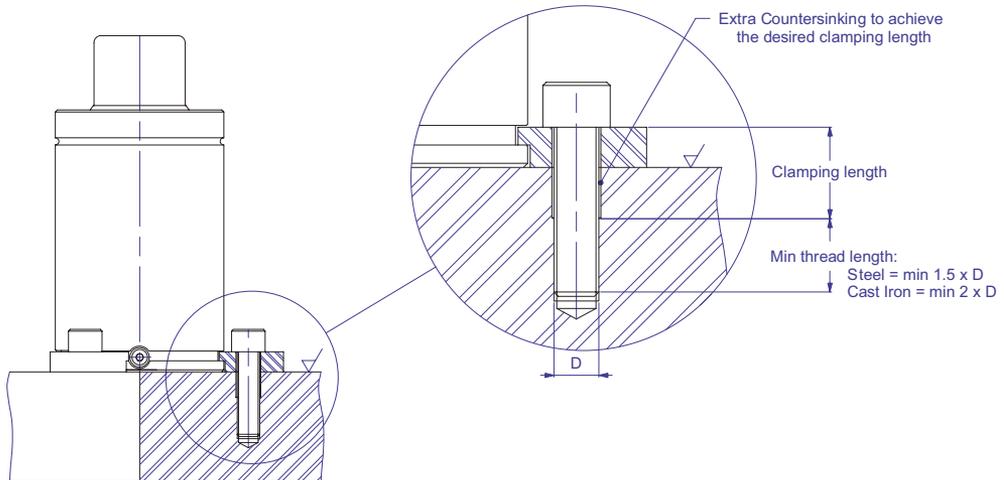

When tightening the mounting screws in the tool, apply an evenly cross like pattern according to the picture (1-2-3-4). Otherwise there is a risk for the mount to tilt.

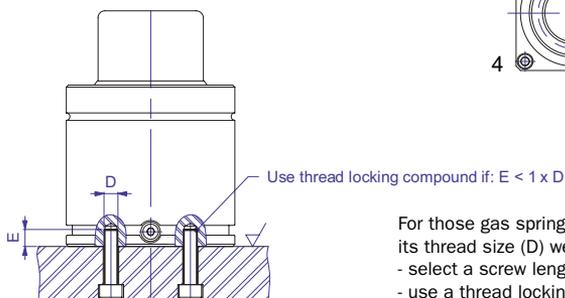

For example: X 2400

For those gas springs whose thread depth (E) is less than 1 times its thread size (D) we recommend the following:

- select a screw length to engage all available thread depth
- use a thread locking compound (middle strength or higher)
- ensure the correct screw torque setting is applied

## Mounting method: Drop-In

**For stroke lengths < 25 mm:** base threaded holes are optional for stroke lengths up to and including 25 mm.

**For stroke lengths > 25 mm:** base threaded holes should always be used for longer stroke lengths to prevent possible side loads and/or gas spring movement within the pocket (with the exception of the R Series Models).

**Gas spring orientations:** only vertically upright installations are recommended (see **Warning!**).



**Hole depth:** min 70% of the spring's Lmin length to ensure sufficient support and reduce the risk of side loading.

**Hole diameter:** +0.5 to +1.0 mm greater than the gas spring's cylinder diameter.

**Hole drainage:** recommended wherever drawing fluids and/or liquid coolants are used in the die.

**Link systems:** Not recommended for stroke lengths < 25 mm.

**Warning!** Never drop a gas spring into a pocket upside down as this may lead to excessive wear on the outside of the tube.

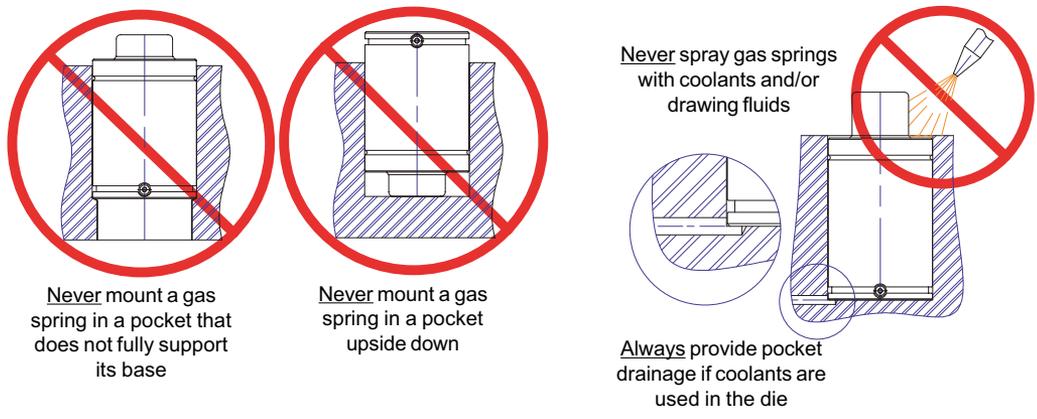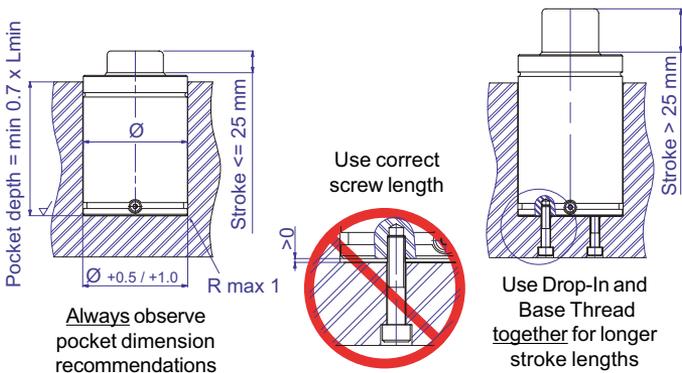

## Mounting method: Base Mount (MP, MPX)

### Stroke length suitability:

For cylinder diameters <math>\lt; \varnothing 25</math> = Max stroke 25 mm

For cylinder diameters >  $\varnothing 25$  = OK for all stroke lengths

**Gas spring orientations:** Vertically upright - OK for all stroke lengths


Vertically upside down - OK up to stroke 125 mm\*

**Link systems:** this mounting method is very suitable for gas link systems

\*For thread depths less than 1 times its thread size use a screw length that engages all thread depth, use a thread locking compound (middle strength or higher) and apply correct screw torque setting.




### For: Base thread

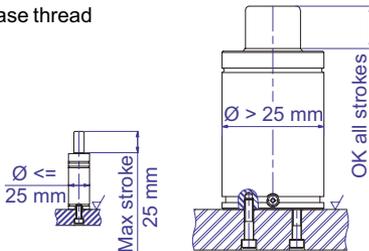

If the gas spring has only a single base threaded hole, then the max stroke length for this mounting method should not exceed 25 mm with the exception of M2 model springs

### For: MP, MPX

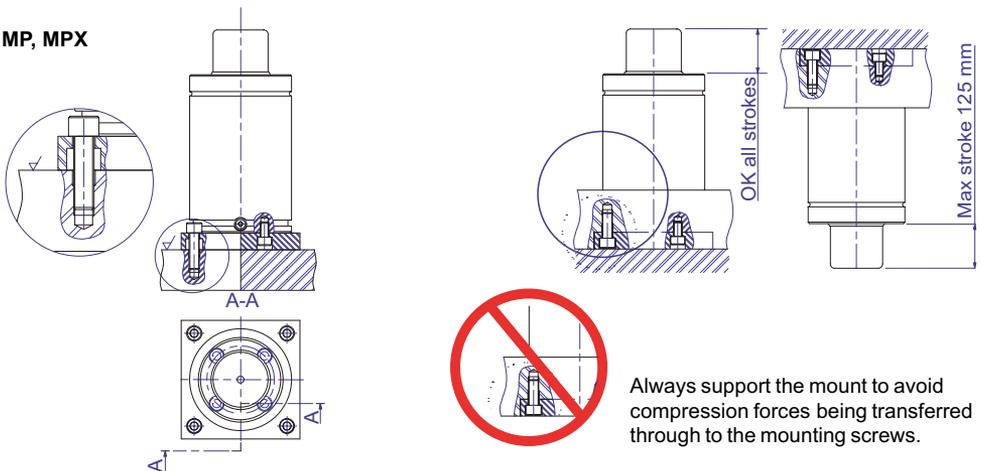

Always support the mount to avoid compression forces being transferred through to the mounting screws.

## Mounting method: Foot mount (BF, FCR, FFC, FFX, FSL, RM)

**Gas spring orientations:** Vertically upright = OK for all stroke lengths  
Vertically upside down = OK up to 125 mm stroke (see **Warning!** below)


**Link systems:** this mounting method is generally suitable for gas link systems, with the exception of the BF, FCR and FSL flange mounts that do not fully prevent rotation of the gas spring.

**Note!** A small gap between Foot Mount and mounting surface is normal before the gas spring is clamped to the die using the mounting screws.


**Warning!** K Foot Mounts are not allowed for vertically upside down installations. Wherever possible, vertically upside down installations using Foot Mounts should be used in combination with base threaded holes to prevent gas spring rotation within the flange and to provide additional security.




For: BF, FCR

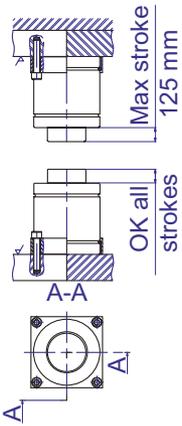


For: FSL

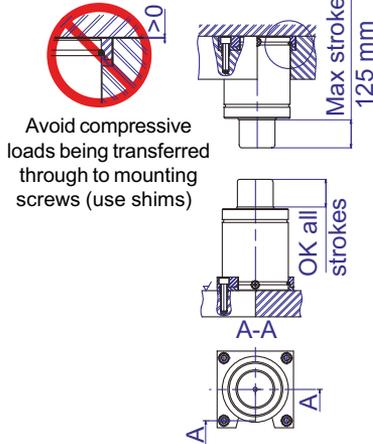


For: RM

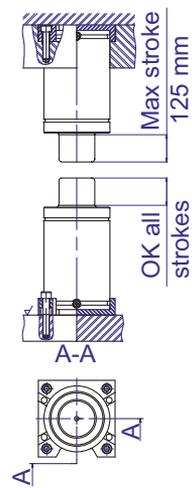

For: FFC, FFX

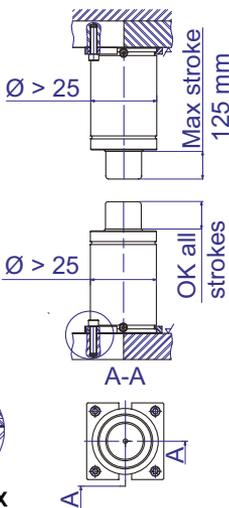

For: K

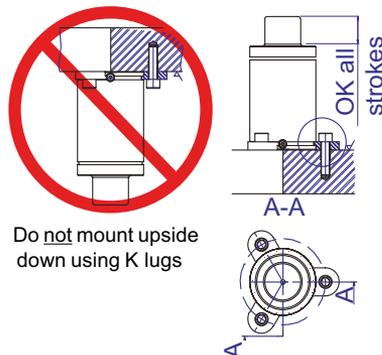

**Mounting method:**

**Top mount (FC, FCS, FCX, FK, FCSC, FCR, FCSX)**

**Gas spring orientations:** Vertically upright = OK for all stroke lengths

Vertically upside down = OK up to 125 mm stroke (see **Warning!** below)

**Cylinder hole clearance for cylinder diameters < Ø32**

hole Ø = cylinder Ø + 0.5 to 1.0 mm

**Cylinder hole clearance for cylinder diameters ≥ Ø32**

hole Ø = cylinder Ø + 0.5 to 2.0 mm




**Link systems:** FCSC is the preferred flange mount for linked systems as the gas spring is unable to rotate in the flange (see Note below).

**Note!** A small gap between flange halves is normal before the gas spring is clamped to the die using the mounting screws. Recent tolerance improvements between gas spring C-grooves and Top Mounts has, in some cases, eliminated the tendency for the gas spring to rotate within the flange.


**Warning!** Depending on the stroke speed of the press, longer stroke gas springs are not generally recommended for upside down installations unless the FCSC flange mount is used. Top Mounts must never be used such that the mounting screws are required to support the full compression force of the gas spring when stroked (see below).

**Note!** Stroke lengths over 125 mm are not allowed for upside down installations unless FCSC flange mount is used.


**For: FC, FCS, FCX, FK, FCSC, FCSX**

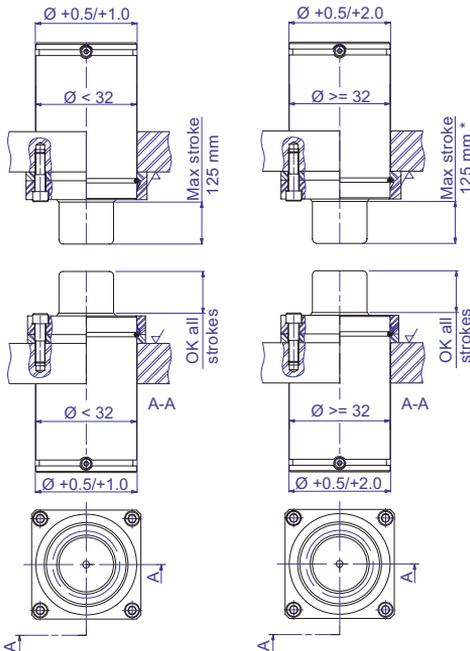

**For: FCR**

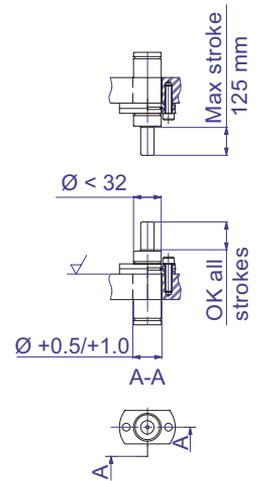

**For: all Top mounts**

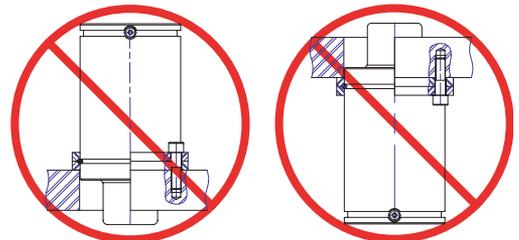

Never let the mounting screws support gas spring compression forces

\* **Note:** for the FCSC flange, upside down installation is OK for all stroke lengths

## Mounting method: Thread mount (including FRM, FTM)


**Gas spring orientations:** Vertically upright = OK for all stroke lengths  
Vertically upside down = OK for all stroke lengths

**Link systems:** it is possible to link thread mounted gas springs if there is sufficient access to the spring's charge port.


Use a removable thread locking compound and ensure that the compound does not touch the piston rod.



### For: EP, EPS

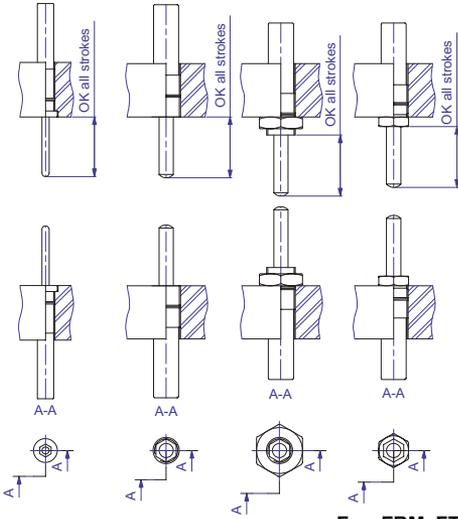

### For: FRM, FTM, TMS/XMS

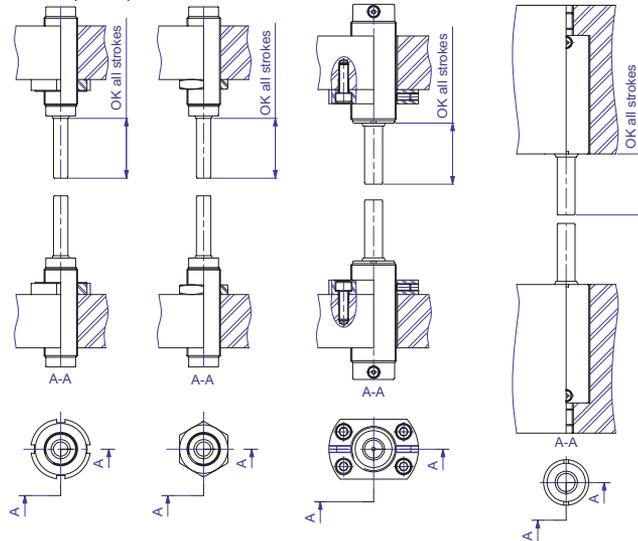

## Mounting method: Body mount (S, SM, HM, FAC, SA, HMF)

**Gas spring orientations:** suitable for all stroke lengths and all gas spring orientations from vertically upright through to upside down (see **Warning!** below).

**Key grooves:** Key-grooves should be used to either recess the Body Mount or to back up the Body Mount with an additional key, thus preventing gas spring compression forces exerting a shear stress on the mounting screws.



**Link systems:** this mounting method is very suitable for gas link systems, since the gas spring is unable to rotate.

**Warning!**



Always ensure the gas spring is mounted such that no side loading occurs.



**For: FAC with SA**

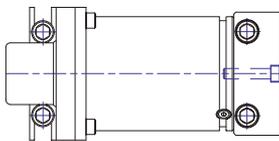
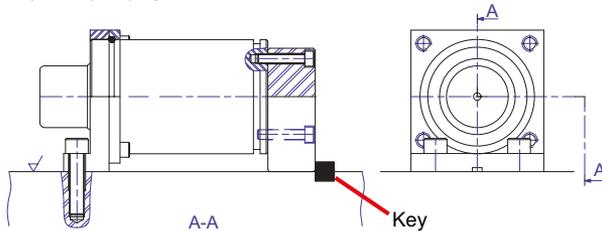


**For: S, SM, HMF**

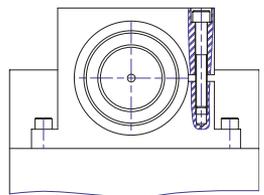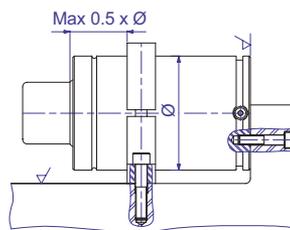

Always support the base of the gas spring when using an S or HMF mount

**For: HM, HMF**

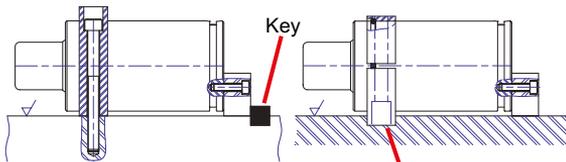



Flange countersunk into 10 mm key groove

## BF

BF is a flange mount used to clamp the base of the gas spring to the tool by using the lower C-groove of the gas spring.



Order No.	A	B	C	D	E	F
BF-19	45	32	25	10	7	7

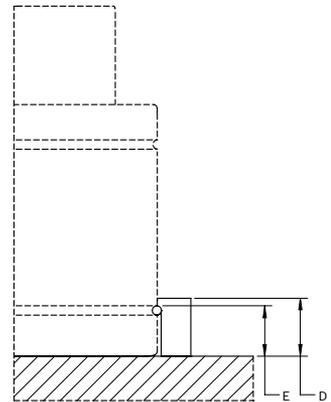
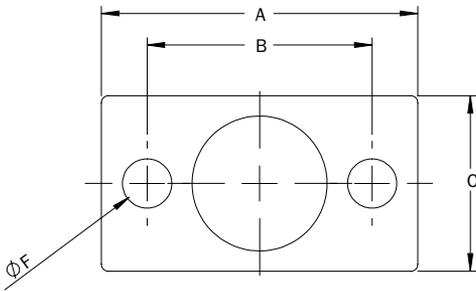


## BFCU

**BFCU is a flange mount used to clamp the base of the gas spring to the tool by using the lower C-groove of the gas spring.**



Order No.	A	B	C	D
BFCU-1000	52	40	14.5	7
BFCU4-1800	70	56.5	19.5	9
BFP-4700	90	73.5	24.5	11
BFP-7500	110	92	27.5	13
BFCU-11800	130	109.5	29.5	13
BFCU-18300	162	138	34.5	17.5


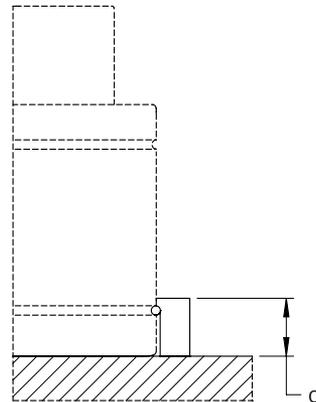
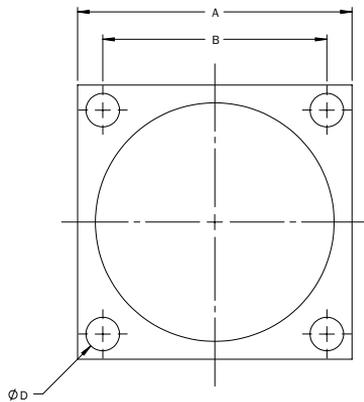


## FAC

The FAC is a 90° angled, 2-piece flange for TU 750 – 5000. The flange is only to be used together with the SA support. It is recommended to back the SA mount with a key.



Order No.	A	B	C	D	E	F	G	H	J
FAC-750	38	8	65	33	12	11	13	45.5	70
FAC-1500	57	11	90	37	15	14	19	53.5	101
FAC-3000	66.5	11	110	63	15	14	19	57.5	121
FAC-5000	79	11	140	88	18	14	19	59.5	149

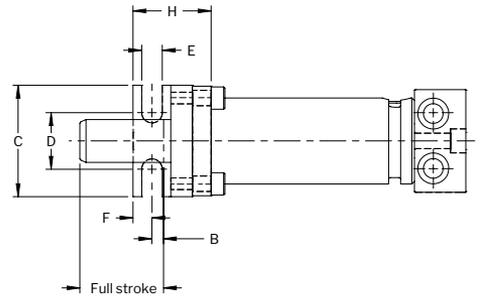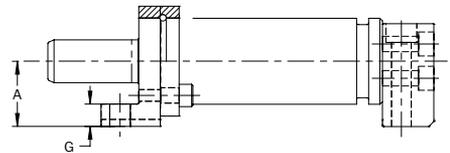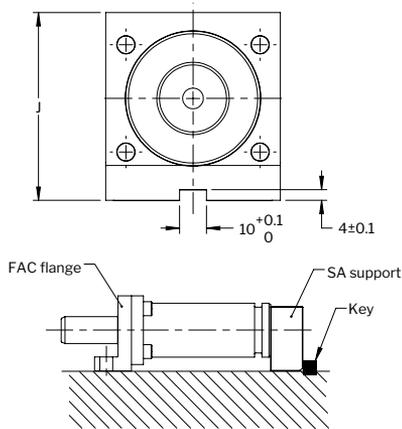



## FC

**FC is a round flange used to mount the gas spring in the upper C-groove.**



Order No.	Spring size	A	B	C	D	E	F
FC-150		50	38	26.9	7	9	16 (CU4 420)* 21.5 (M2, X 320)*
FCN-150	M2, X 320	56	42	29.7	9	9	16 (CU4 420)* 21.5 (M2, X 320)*
FC-MC-150		60	49.5	35	7	9	16 (CU4 740)* 17 (MC3, MC3-SP, MT 300, X350, XG 350)*
FC-250		68	56.5	40	7	9	15 (CU4 1000)* 17 (MT 500, TU 250, X500, XG 500)*
FCN-250	TU 250, X/XG 50,0	70	56.6	40	9	9	15 (CU4 1000)* 17 (MT 500, TU 250, X500, XG 500)*
FC-500		86	70.7	50	9	13	22 (K 500)* 23 (MT 750, TU 500, TX 750, X750, XG 750, XF 750)*
FC-750		95	80	56.5	9	13	22 (K 750)* 24 (MT 1000, X 1000, XG 1000, XF 1000, LCF 750, TL 750, TU 750, TUS 750, TX 1000)*
XFC-1500	X/XG 1500	105	85	60	11	16	27
XFCJ-1500	X /XG 1500	122	104	73.5	11	16	27
FC-1500		122	104	73.5	11	16	29
FC-3000		150	130	92	13.5	18	33
FC-5000		175	155	109.5	13.5	21	33 (CU4 11800)* 36 (X 6600, XG 6600, LCF 5000, SPC 3000, TL 5000, TU 5000, TUS 5000, TX 6600)*
FC-7500		220	195	138	17.5	27	38 (CU4 18300)* 41 (LCF 7500, SPC 5000, TL 7500, TU 7500, TUS 7500, TX 9500, X 9500)*

\*Mounts to this model/models

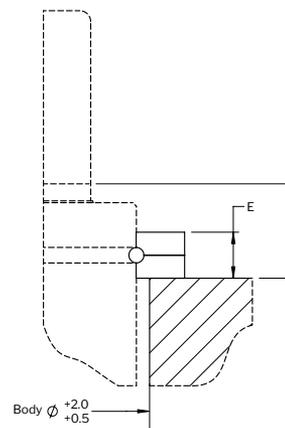
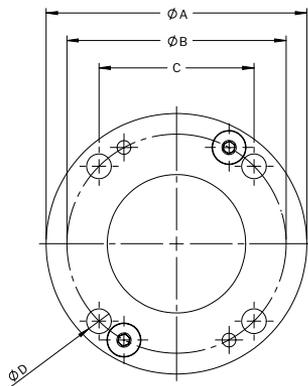


## FC (R)

FC is a round flange used to mount the gas spring in the upper C-groove.



Order No.	A	B	C	E	F
FC-12	25	36	6.6	9	21.5
FC-15	27	37	6.6	9	21.5
FC-19	32	44	6.6	9	21.5

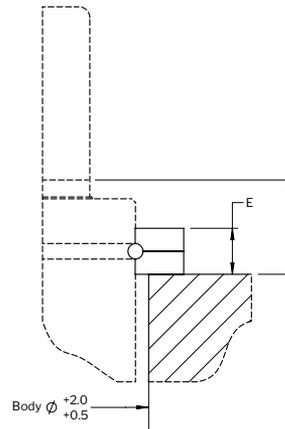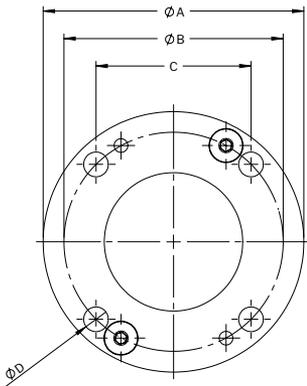

## FCR


**FCR is a rectangular flange mount used to mount the gas spring in the upper C-groove. FCR meets ISO 11901-2, VDI 3003, GM 90.25 and other standards**




Order No.	A	B	C	D	E	F
FCR-12	34	24	21	6.6	21.5	9
FCR-15	37	27	24	6.6	21.5	9
FCR-19 VDI2	45	32	25	7	21.5	9
FCR-25	50	38	30	7	16/21.5*	9

\*depending on gas spring model

**Note!** Ensure the correct groove is used - see note below on using the correct groove.

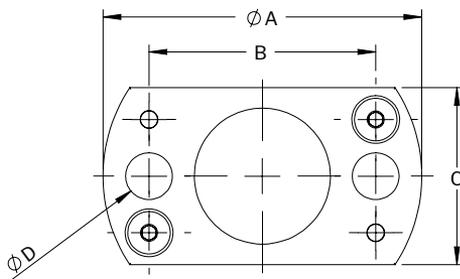

**Note!** This groove is not to be used for mounting for gas springs R19 and X170.

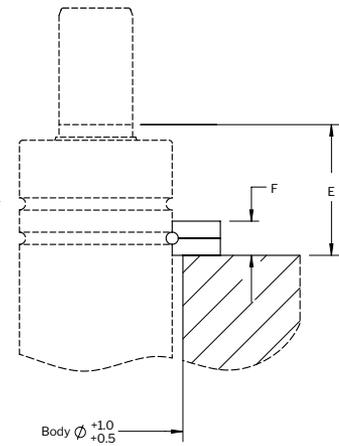



## FCR ISO

FCR is a rectangular flange mount used to mount the gas spring in the upper C-groove. FCR meets ISO 11901-2, VDI 3003, GM 90.25 and other standards



Order No.	A	B	C	D	E	F	G
FCR-90	45	30	12	25	21.5	9	7
FCR-150	50	34	18	30	16 (CU4 420)* 21,5 (M2, X 320)*	9	7

\*Mounts to this model/models

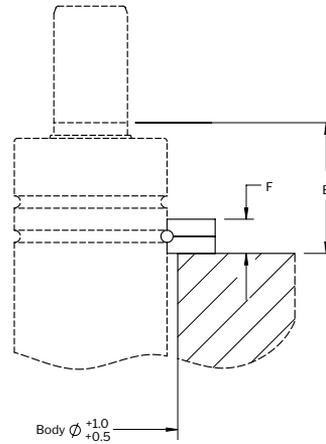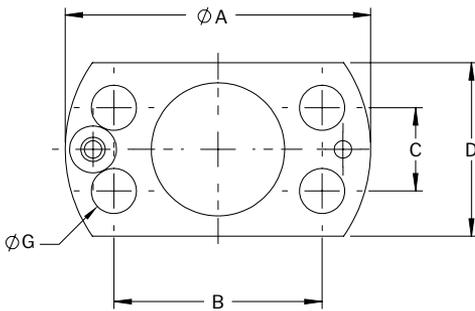



## FCS

FCS is a square flange mount used to mount the gas spring in the upper C-groove. FCS meets the ISO 11901-2, VDI 3003, Ford WDX35-62, GM 90.25 and other standards.



Order No.	A	B	C	D	E	F
FCS-32	49.5	45	35	7	9	16 (CU4 740)* 17 (MC3, MC3-SP, MT 300, X 350, XG 350)*
FCS-250	56.5	52	40	7	9	15 (CU4 1000)* 17 (MT 500, TU 250, X 500, XG 500)*
FCS-500	70.7	64	50	9	13	22 (K 500)* 23 (MT 750, TU 500, TX 750, X 750, XG 750, XF 750)*
FCS-750	80	70	56.5	9	13	22 (K 750)* 24 (MT 1000, X1000, XG 1000, XF 1000, LCF 750, TL 750, TU 750, TUS 750, TX 1000)*
FCSX-1500	90.5	80	64	11	16	27
FCS-1500	104	90	73.5	11	16	29
FCX-1500	104	90	73.5	11	16	27
FCS-3000	130	110	92	13.5	18	33
FCS-5000	155	130	109.5	13.5	21	33 (CU4 11800)* 36 (X 6600, XG 6600, LCF 5000, SPC 3000, TL 5000, TU 5000, TUS 5000, TX 6600)*
FCS-7500	195	162	138	17.5	27	38 (CU4 18300)* 41 (LCF 7500, SPC 5000, TL 7500, TU 7500, TUS 7500, TX 9500, X 9500)*
FCS-10000	240.4	210	170	17.5	27	47

\*Mounts to this model/models

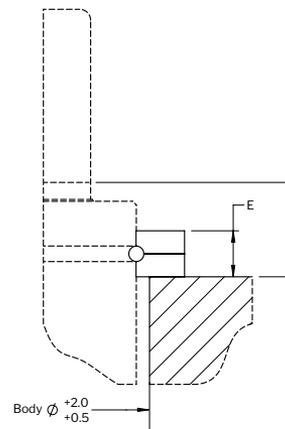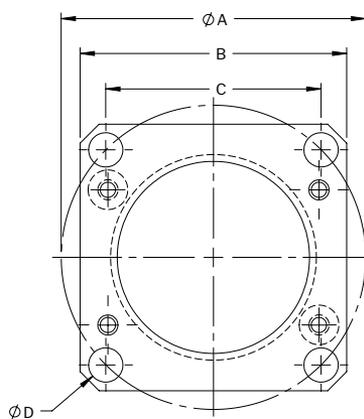

## FCSC

**Patent No. SE 521 352, EP 1 565 670, US 7,544,008**



The FCSC Clamp Flange has a unique patented design that offers a very robust clearance free connection between the gas spring and the mount. This play-free connection also prevents rotation of the gas spring. The FCSC Clamp Flange is especially suitable for gas springs that will be linked together by a hoses system and/or are used in high-speed, long-stroke upside-down installations. The FCSC Clamp Flange is available for gas springs sizes from 500 up to 7,500.



Order No.	Spring size	A	B	C	D	E	F
FCSC-500	X 750, TU 500, TX 750, K 500	45	64	50	9	22 (K 500)* 23 (X 750, TU 500, TX 750)*	18.4
FCSC-750	X 1000, TU 750, TX 1000, K 750	50	70	56.5	9	22 (K750)* 24 (X 1000, TU 750, TX 1000)*	19.4
FCSCX-1500	CU4 2900, X 1500, TX 1500	63	80	64	10.5	27	23.9
FCSC-1500	X 2400, TU 1500, TX 2400	75	90	73.5	10.5	29	26
FCSC-3000	X 4200, TU 3000, TX 4200	95	110	92	12.5	33	30
FCSC-5000	CU4 11800, X 6600, TU 5000, TX 6600	120	130	109.5	12.5	33 (CU4 11800)* 36 (X 6600, XG 6600, LCF 5000, SPC 3000, TL 5000, TU 5000, TUS 5000, TX 6600)*	32.4
FCSC-7500	CU4 18300, X 9500, TU 7500, TX 9500	150	162	138	16.5	38 (CU4 18300)* 41 (LCF 7500, SPC 5000, TL 7500, TU 7500, TUS 7500, TX 9500, X 9500)*	38

\*Mounts to this model/models

Note: The FCSC and FCS flanges are fully interchangeable if low head cap mounting screws (4x) are used. Using low head cap screws ensures the top of the screw is flush with the top of the flange. If normal head cap screws are used, the top of the screw will protrude from the top of the flange by 3 mm.

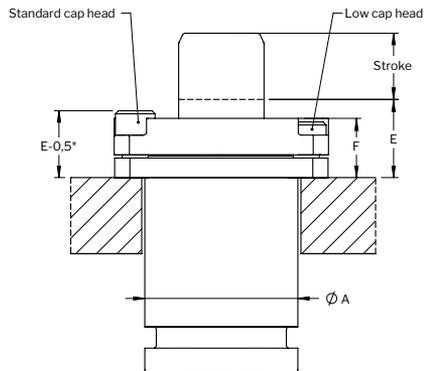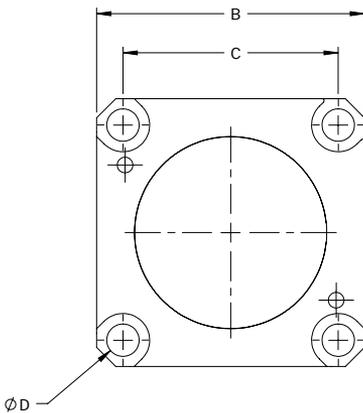



Low cap head screws are recommended  
\* If standard screws are used

## FFC

**FFC is a foot mount used to clamp the base of the gas spring to the tool by using U-groove of the gas spring. FFC meets the ISO 11901-2, VDI 3003, Ford WDX35-62, GM 90.25 and other standards.**



Order No.	A	B	C	D	E	F
FFC-MC-150	50	35	49.5	7	12	6.5
FFC-250	55	40	56.6	7	12	6.5
FFC-500	70	50	70.7	9	20	6.5
FFC-750	75	56.5	80	9	24	12
FFX-1500	100	73.5	104	11	24	12
FFCX-1500	85	60	84.85	11	23	12
FFC-1500	100	73.5	104	11	24	12
FFC-3000	120	92	130	13.5	24	12
FFC-5000	140	109.5	155	13.5	24	12
FFC-7500	190	138	195.2	17.5	24	12
FFC-10000	210	170	240.4	17.5	24	13
FFC-XG-350	50	35	49.5	7	18	6.5
FFC-XG-500	55	40	56.6	7	18	6.5

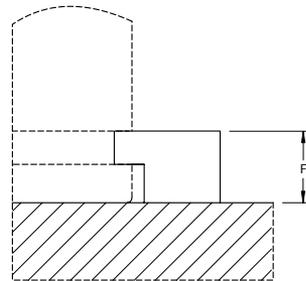
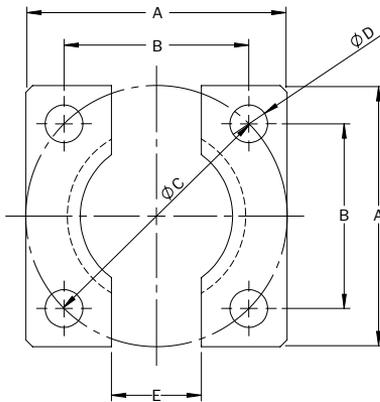


## FFL

The FFL mount is of the same type as the FFC mount, but with external dimensions and hole pattern as the FSL mount.



Order No.	A	B	C	D	E	F
FFL-750	76.2	53.9	76.2	11	26	12
FFL-1500	101.6	76.2	107.8	13.5	26	12
FFL-3000	127	98.3	139	13.5	24	12
FFL-5000	139.7	114	161.7	13.5	24	12
FFL-7500	177.8	139.7	197.6	18	24	12

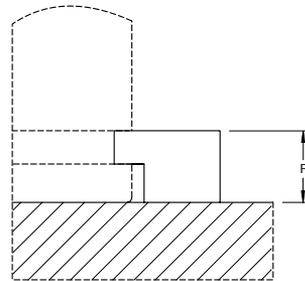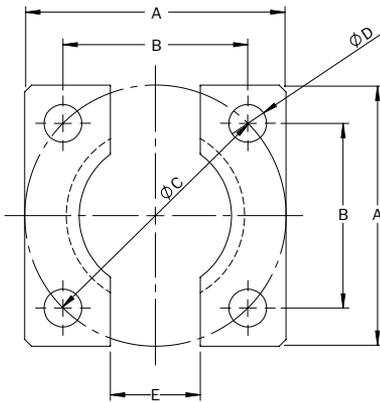



## FK

**FK is a square flange used to mount the gas spring in the upper C-groove.**



Order No.	A	B	C	D	E	F
FK-1500	104	90	73.5	11	16	26 (CU4 4700)* 29 (K 1500)*
FK-1800	80	70	56.5	9	13	21
FK-3000	130	110	92	13.5	18	30

\*Mounts to this model/models


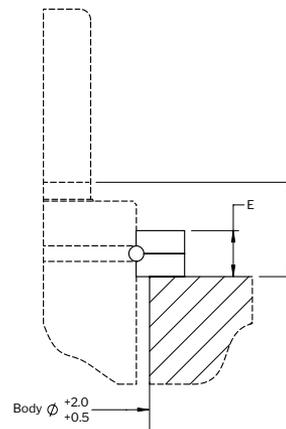
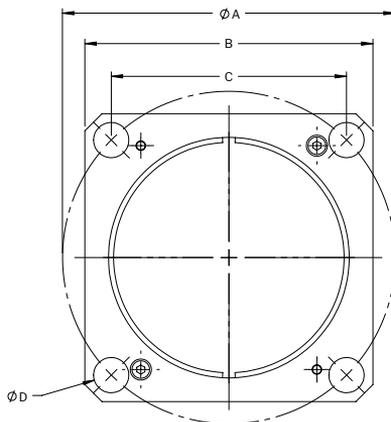


## FRM

FRM is a slotted round lock nut, which meets the GM standard 90.25.99. The FRM lock nut is to be used on gas springs with an outer metric thread on the tube.



Order No.	A	B	D	E	G
FRM-16	M16x1.5	32	5	2	7
FRM-19	M24x1.5	42	6	2.5	9
FRM-150	M28x1.5	50	7	3	10
FRM-250	M38x1.5	58	8	3.5	11

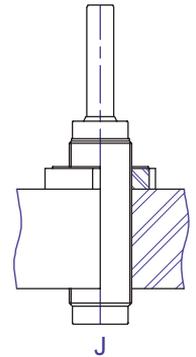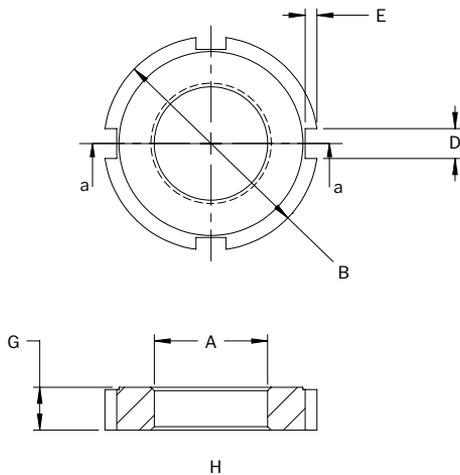


## FSL

- The FSL flange type was originally developed to fit gas springs with a lower C-groove and consists of two flange halves with a lock ring between
- The FSL flange can be used for both upright and upside-down installations.
- The FSL flange can also be used on gas springs with a lower U-groove by using the FSL adapter ring accessory (see page 242).
- The FSL adapter ring is ordered separately and, when used, replaces the standard lock ring included in the FSL flange.



Order No.	Spring size	A	B	C	D	E	F	G	H	I	J
FSL-750	TU 750, X 1000	76.2	53.9	76.2	35	25.7*	25	11	17	11	25.7*
FSLT-1500	X 1500	100	73.5	103.9	49	25.5*	24	11	18	10	25*
FSL-1500	TU 1500, X 2400	101.6	76.2	107.6	49	25.7*	25	13	20	13	25.7*
FSL-3000	TU 3000, X 4200	127	98.3	139	61	25.7*	25	13.5	20	13	25.7*
FSL-5000	TU 5000, X 6600	139.7	114.3	161.8	71	25.7*	25	13.5	20	13	25.7*
FSL-7500	TU 7500, X 9500	177.8	139.7	197.8	88	25.7*	25	18	26	17	25.7*

\*approximate value

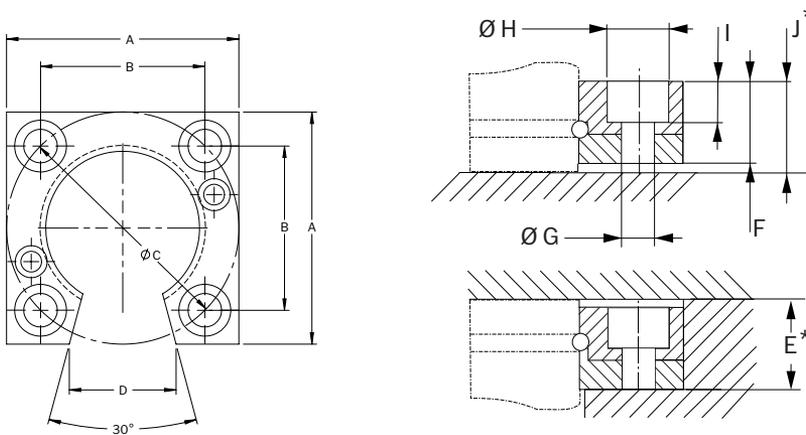

## FSL Adapter ring



The FSL flange can also be used on gas springs with a lower U-groove by using the additional FSL adapter ring.

The FSL adapter ring, when used, replaces the standard lock ring included in the FSL flange.




Order No.	FSL Adapter Ring size	Spring size	G*	H*
3020946	750	TU 750, X 1000	26	26
3027144	X 1500	X 1500	25.8	25.4
3020947	1500	TU 1500, X 2400	26	25.9
3020948	3000	TU 3000, X 4200	26	25.9
3020949	5000	TU 5000, X 6600	26	25.9
3020950	7500	TU 7500, X 9500	26.6	26.4

\* approximate value

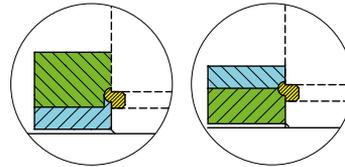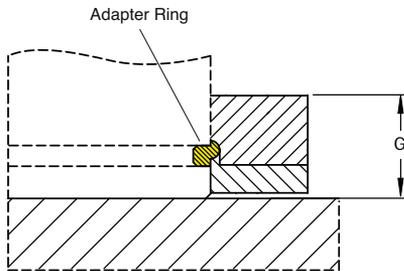

### **Important! FSL-Adapter Ring location**

The orientation of the FSL-Adapter Ring should always be the same regardless of the position of the flange halves (standing upright or upside-down). Only the flange halves change position.

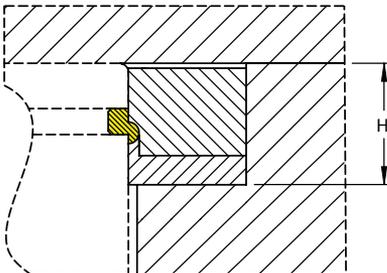

## FSS

The FSS mount is of the same type as the FSL mount, but with external dimensions and hole pattern as the FFC mount. The FSS mount fits on gas springs with a lower U-groove. The FSL adapter ring is included in the FSS mount and does not need to be ordered separately. The FSS mount can be used for both upright and upside down installation.



The FSS mount meets the Subaru standard SD116401.



Order No.	Spring size	A	B	C	D	E	F	G	H	I	J
FSS-750	TU 750, X/XG 1000	75	56.5	80	35	26*	25.5	9	15	10.5	26*
FSS-1500	TU 1500, X/XG 2400	100	73.5	104	49	26*	25.9	11	18	13	26*
FSS-3000	TU 3000, X/XG 4200	120	92	130	61	26*	25.9	13.5	20	13	26*
FSS-5000	TU 5000, X/XG 6600	140	109.5	155	71	26*	25.9	13.5	20	13	26*
FSS-7500	TU 7500, X 9500	175**	138	195.2	84	26.4*	26.2	21	21	16	26.6*

\*approximate value

\*\* For FSS-7500: A'=190, all others: A=A'

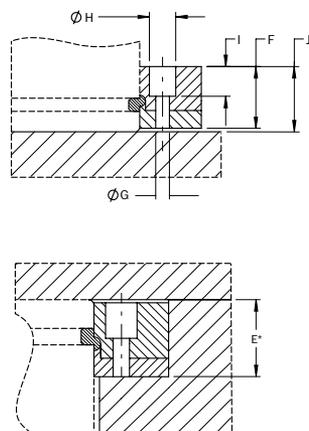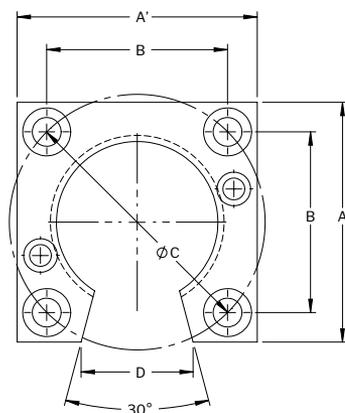


## FTM

FTM is rectangular lock nut with lock screw. The FTM lock nut is to be used on gas springs with an outer metric thread on the tube.



Order No.	A
FTM-250	M38x1.5

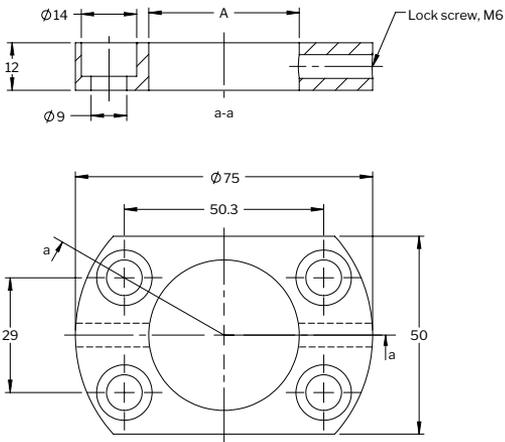

## HM

**HM (Horizontal Mount)** is a mount for TU 750-3000 springs. This mount meets FORD WDX35-62-standard. If the front support is not mounted in a key groove, make sure that the rear mount is backed up using a key (see Fig. A and B). Screws for attaching the spring to the mount are included in the delivery.



Order No.	A	B	C	D	E	F	G	H	J	K	L	M	P	Q	R
HM-250	74	54	29.5	12	40	60	54	23.9	16	15	9	9	20	10	38
HM-750	90	68	43	13	44	65	70	30	25	18	11	11	30	15	45
HM-1500	125	100	45	12	57	80	94	42	32	20	13.5	13.5	30	15	45
HM-3000	140	115	48	15	70	95	115	52.5	33	20	13.5	13.5	30	15	45

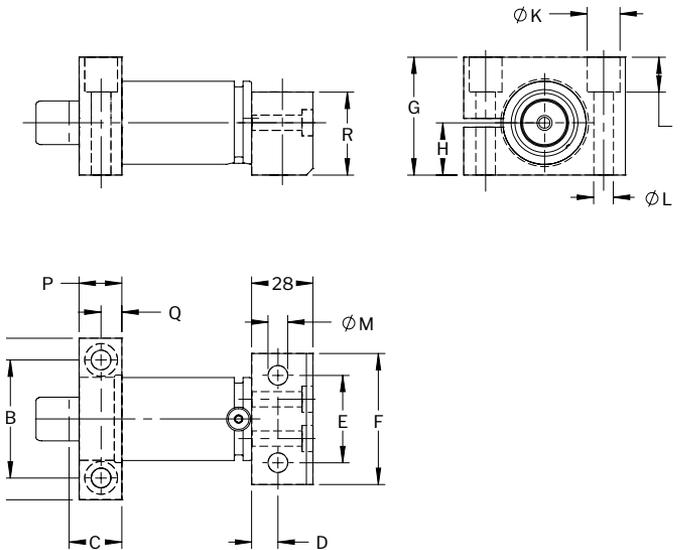


Fig. A


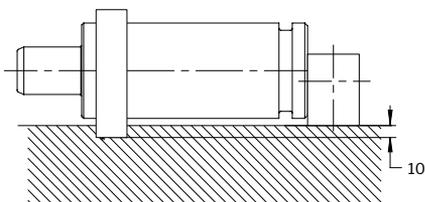


Fig. B






## HMF

The HMF mount is a symmetric horizontal body mount similar to the S mount. The HMF mount meets the VDI 3003, Ford WD-X35-62 and GMDS 90.25.455 standard.

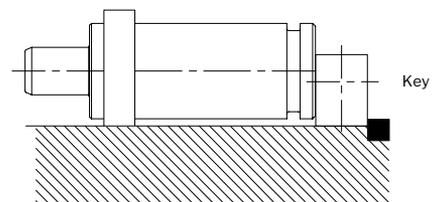

Order No.	A	B	C	D	E	F	G	H	J	K	L
HMF-150	68	48	20.9	10	50	32.1	9	15	10	20	31.9
HMF-250	74	54	23.9	16	54	38.1	9	15	10	20	38
HMF-500	80	60	27.5	22	60	45.4	9	15	10	20	45.2
HMF-750	90	70	30	25	68	50.4	11	18	15	30	50.2
HMF-X1500	108	82	36.5	27	84	63.4	11	18	15	30	63.2
HMF-1500	125	94	42	32	100	75.4	13.5	20	15	30	75.2
HMF-3000	140	115	52.5	33	115	95.4	13.5	20	15	30	95.2
HMF-5000	170	140	65	58	145	120.4	13.5	20	15	30	120.2
HMF-7500	200	170	80	68	175	150.4	13.5	20	15	30	150.2

Note! The base of the gas spring must always be supported when using the HMF mount.

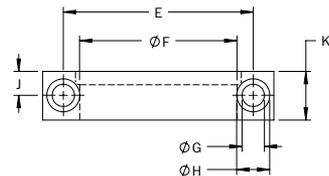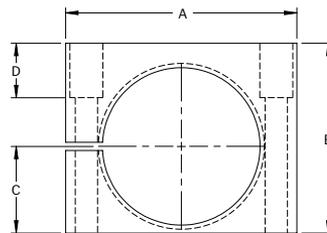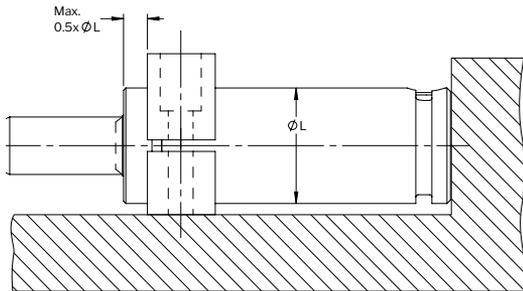





## K-LUG

The K-lug is used to clamp the gas spring vertically upright to the tool. The gas spring can be clamped down using 2, 3 or 4 K-lugs. If only 2 lugs are used, then locking plate L must also be used to fix the gas spring. Note: When using locking plate L together with K-lugs, the spring cannot be hosed together as the L-plate will cover the gas charge port of the gas spring. Important! The K-lugs are only to be used to mount the spring vertically upright.



Order No.	Spring size	C	D	E	F
K-250	250 (X 500)	20	7	7	56.6
K-500	500 (X, TX 750)	25	9	7	70.7
K-750	750 (X, TX 1000)	30	13.5	14	80
KX-1500	X, TX 1500	30	13.5	14	92
K-1500	1500 (X, TX 2400)	30	13.5	14	104
K-3000	3000 (X, TX 4200)	40	17.5	14	130
K-5000	5000 (X, TX 6600)	50	17.5	14	155
K-7500	7500 (X, TX 9500)	50	21.5	14	195
K-10000	10000 (X, TX 20 000)	58	21.5	15	240

Note: When ordering K-lugs for X/TX springs, a lug of smaller size than the spring must be used. For example, an X/TX 2400 spring requires lug K-1500.

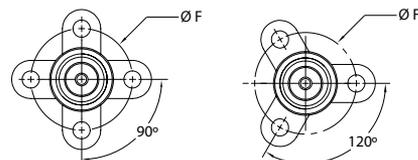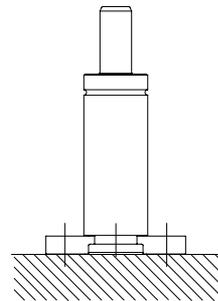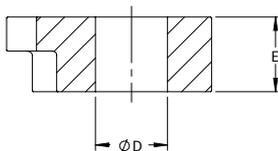
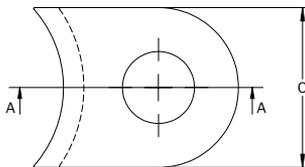


## L

When fixing gas springs vertically using 2 K-lugs, locking plate L must be used to ensure that the spring will be fixed radially.




Order No.	A	B	C	D	E	F	G
L-250	76.6	56.6	20	7	48	9.5	2.5
L-500	95.8	70.7	25	9	56	9.5	2.5
L-750	110	80	30	13	61	16.5	2.5
LX-1500	122	92	30	13.5	74	16.5	2.5
L-1500	134	104	30	13	86	16.5	2.5
L-3000	170	130	40	17	106	16.5	2.5
L-5000	205	155	50	17	131	16.5	2.5
L-7500	245	195	50	21	170	16.5	2.5

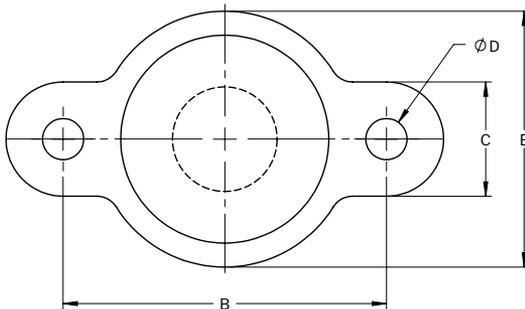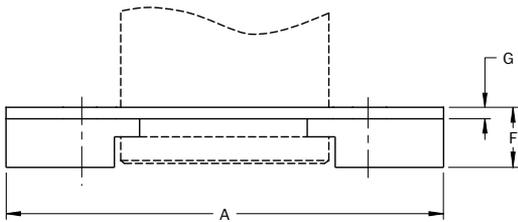


## MP

MP is a square base mount to mount the gas spring to the tool by using the bottom threads of the gas spring into the tool. MP meets the ISO 11901-2, GM 90.25 and other standards.

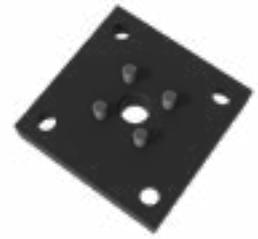


Order No.	A	B	C	D	E	F	G	H	J	K
MP-500	70	50	9	15	12	20	9	15	14	20
MP-750	75	56.5	9	15	12	20	9	15	14	20
MPX-1500	100	73.5	10.5	18	13	20	9	15	12	20
MP-1500	100	73.5	11	18	12	40	9	15	14	20
MP-3000	120	92	13.5	20	13	60	9	15	14	20
MP-5000	140	109.5	13.5	20	13	80	11	18	15	20
MP-7500	190	138	17.5	26	17	100	11	18	20	25
MP-10000	210	170	17.5	26	17	120	13.5	20	13	25


MP-500 MP-750

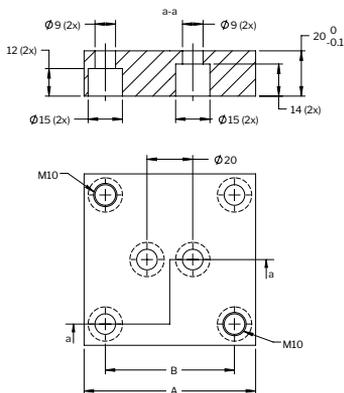

MP-1500 MP-3000 MP-5000 MP-7500 MP-10000

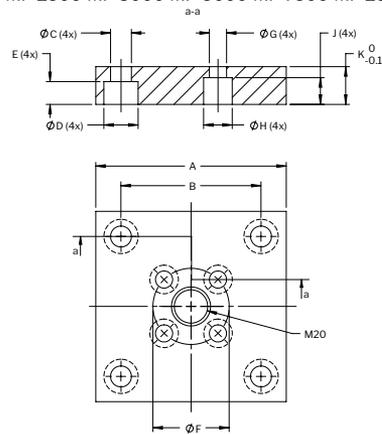

MPX-1500

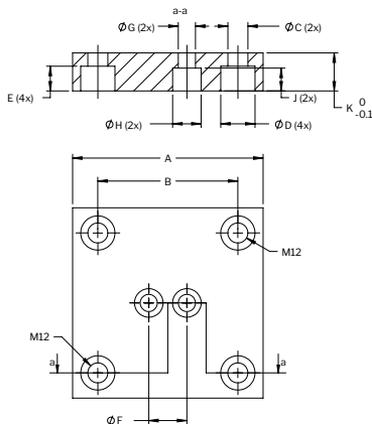


## NMP

The NMP is a rectangular base mount, which meets the Nissan standard K32P0.




Order No.	Spring size	A	B	C	D	E	F	G	H	I
NMP-750	XG 750	90	70	20	45	16	10	9	14	9
NMP-1000	XG 1000	100	75	20	50	19	13	14	14	9
NMP-2400	XG 2400	130	105	40	80	19	13	14	14	9
NMP-4200	XG 4200	150	125	60	100	19	13	14	14	9

NMP-750 NMP-1000

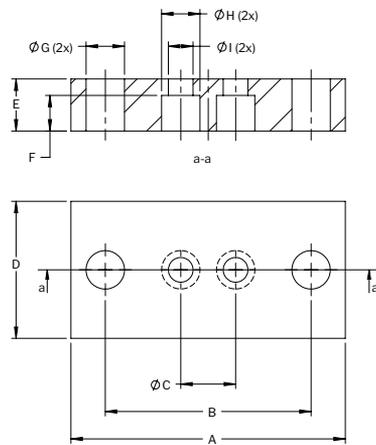

NMP-2400 NMP-4200

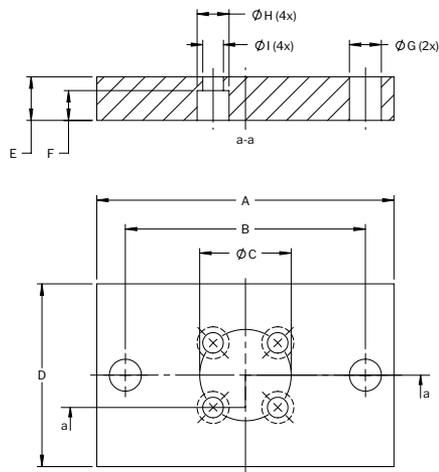


## RM

The RM mount is a removable square mount for mounting the gas spring in the base. The RM mount meets the Ford W-DX35-80 North America standard.



Order No.	A	B	C	D	E	F	J
RM-750	80	56.5	21.1	18	11	11	50.2
RM-1500	100	73.5	33.7	18	11	11	75.2
RM-3000	120	92	43.2	20	13.5	13	95.2
RM-5000	140	109.5	55.7	20	13.5	13	120.2
RM-7500	190	138	70.7	26	18	17	150.2
RMX-750	70	50	21.2	15	9	11	45.2
RMX-1000	80	56.5	21.1	18	11	11	50.2
RMX-1500	100	73.5	33.7	18	11	11	63.2
RMX-2400	100	73.5	33.7	18	11	11	75.2

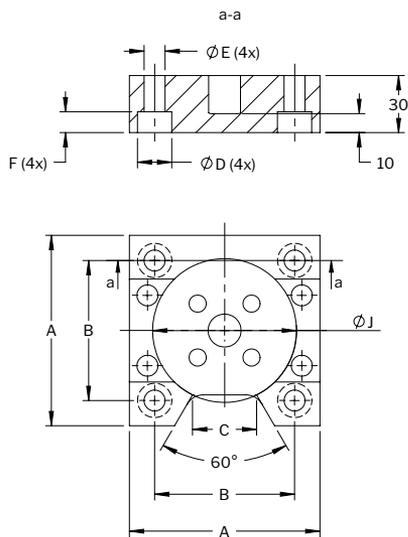


## S

The S mount is a horizontal body mount allowing the gas spring to be installed in any orientation within the die.



Order No.	A	B	C	D	E	F	G	H	I	J
S-MC	32.1	18	22	22.5	90	72	9	8.5	20	15
S-250	38.1	18	24	27.5	95	77	8	9	20	15
S-500	45.4	17	29	30	100	82	9	9	20	15
S-750	50.4	20	40	40	130	110	10	9	30	20
S-1500	75.4	22.5	52.5	52.5	160	137	11.5	11	30	20
S-3000	95.4	25	67.5	62.5	195	170	12.5	13	30	20
S-5000	120.4	27.5	77.5	74	220	195	12.5	13	30	20
S-7500	150.4	30	95	100	260	230	15	13	30	20

Note! The base of the gas spring must always be supported when using the S mount.

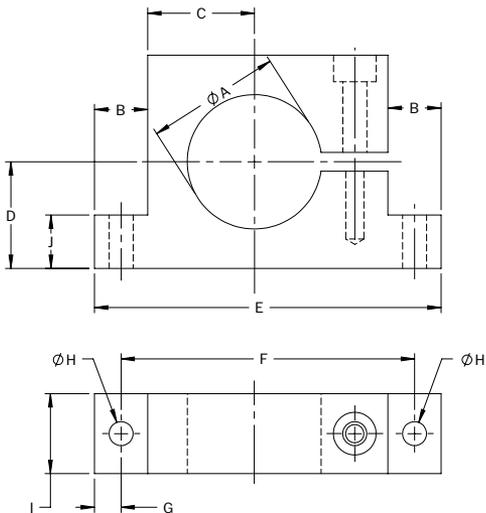


## SA

The SA support can be fitted using the B mount option on TU springs and is normally used together with the FAC flange. The SA support is supplied complete with screws needed to mount the support to the spring.

It is required to back the SA mount with a key.



Order No.	A	B	C	D	E	F	G	H
SA-750	60	32	30	11.5	38	11	11	18
SA-1500	90	38	35	14.5	57	13	14	20.5
SA-3000	110	63.5	40	14.5	66.5	13	14	20.5
SA-5000	130	88.9	50	17.5	79	16	14	25

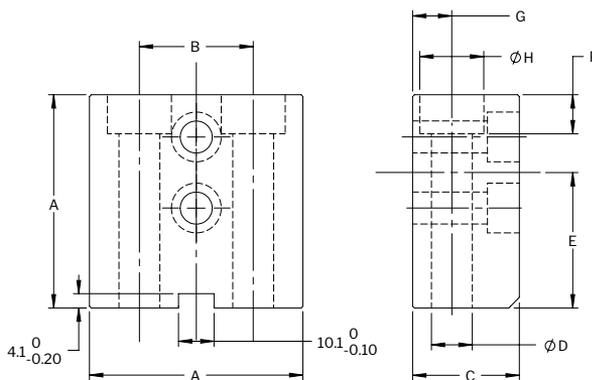


## SM

SM is a body mount for the M2 gas spring.



Order No.	A	B	C	D	E	F	G	H	I	J	K	L
SM-150	54	38	37	13.5	9	6.5	14.5	9	52	15	30	7

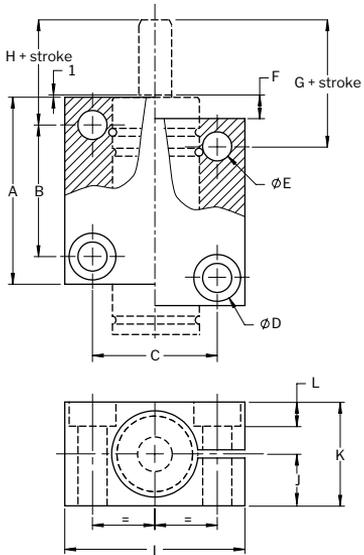


## SP

SP is a Side Port plate for the CU4 spring used for connecting into a hoses or linked system.




Order No.	B	C
SP-1000	25	38
SP-1800	26	50.2
SP-2900	34	63.2
SP-4700	40	75.2
SP-7500	52	95.2
SP-11800	68	120.2
SP-18300	90	150.2


SP-1000

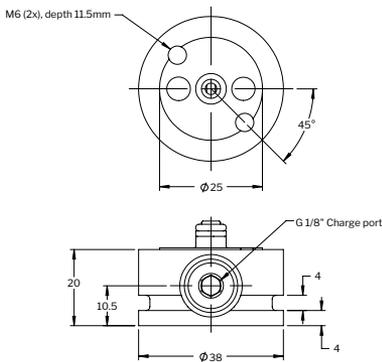


SP-1800

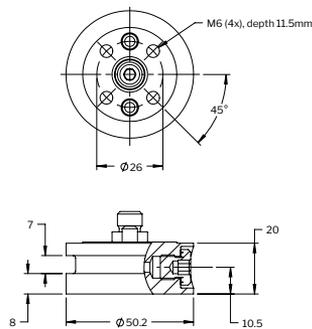


SP-2900

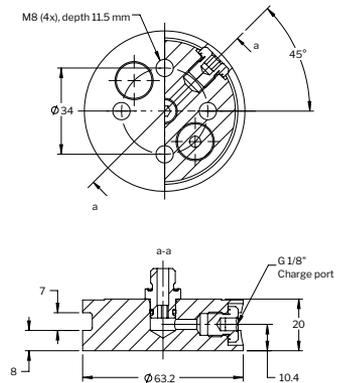

SP-4700, SP-7500

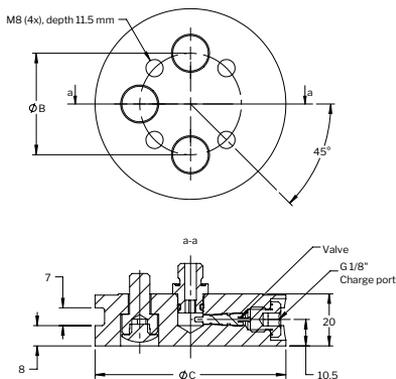

SP-1180, SP-18300

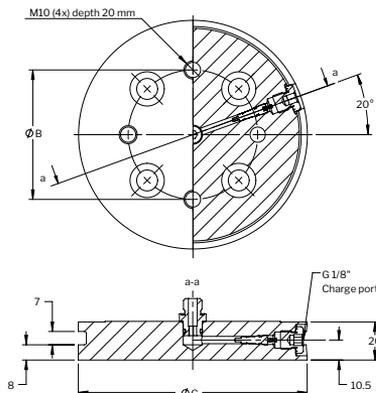


## SPCX

SPCX is a Side Port plate for the CX spring used for connecting into a hoses or linked system




Order No.	A	B	C	D	E	F	G	H
SPCX-500	52	15	16.4	10.5	31.9	4	3.5	20
SPCX-1000	45	25	16.4	10.5	38	4	4	20
SPCX-1900	45	26	16.4	10.5	50.2	8	7	20


SPCX-500

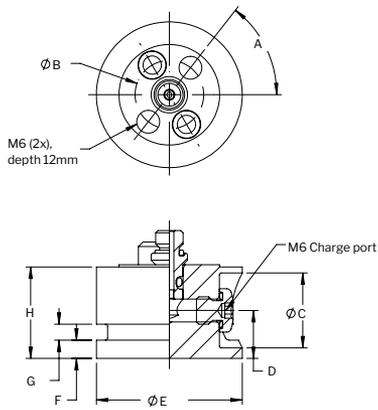

SP-1000

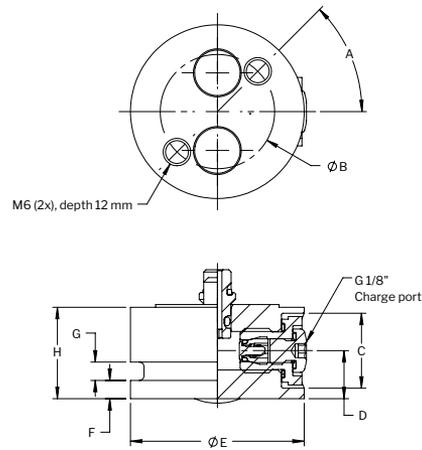

SPCX-1900


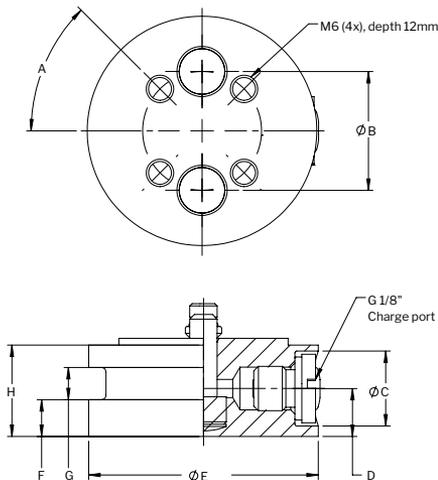


## SPRM

SPRM is a Side Port Rear Mount for the CU4 spring (CU4 4700 - 18300) used for connecting into a hoses or linked system. The SPRM mount is included the Ford W-DX35-62 global standard.



Order No.	A	B	C	D	E
SPRM-75	90	73.5	11	75.2	36
SPRM-95	110	92	13.5	95.2	40
SPRM-120	130	109.5	13.5	120.2	43
SPRM-150	162	138	17.5	150.2	48

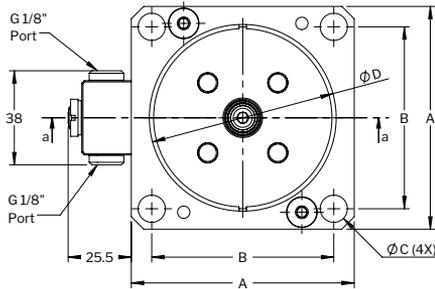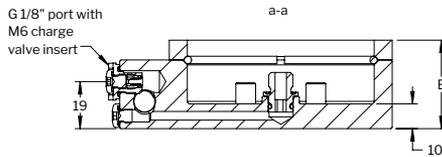





# THE SAFER CHOICE

Introduced in 1983, the KALLER gas spring technology quickly led to worldwide demand. The Safer Choice – Training, Safety and Reliability – has always been a KALLER top priority for providing innovative solutions for the safer working environment. We recommend looking through all available KALLER features when selecting gas springs and gas or hose linked systems.



## KALLER Safety App

SAFETY. Fake or KALLER original? With the KALLER Safety App you can identify and verify your specific KALLER gas springs.



## Overstroke Protection System

SAFETY. When a gas spring is overstoked, this helps reduce the risk of tool damage or injury.



## PED approved for a minimum of 2 million strokes

RELIABILITY. Our 2 million stroke PED approval ensures safer component cycle life.



## Overload Protection System

SAFETY. Jammed cam or tool part being forced by gas springs? This will help reducing such risks.



## Overpressure Protection System

SAFETY. Vents the spring if the internal gas pressure exceeds the maximum allowable limit to prevent accidents.



## Flex Guide™ System

RELIABILITY. Prolongs service life, allows more strokes per minute, and offers greater tolerance to lateral tool movements.



## Dual Seal™ Link Systems

RELIABILITY. Fewer production interruptions due to leakage caused by vibration. Simplified installation thanks to the non-rotation feature.



## KALLER Training Program

TRAINING. Without doubt the KALLER Training Program is the best and most creative way to fully understand and appreciate the importance of the safety and reliability features.