



DieMax XL[®]

Maximum Life Springs



- ISO Inch
- ISO Metric
- JIS
- R-Series

DieMax XL® – Maximum Life Springs

Since 1923, Danly Delivers Quality Diemakers' Supplies

Danly is the leading manufacturer of die making supplies and components for industry in North America. Since 1923, Danly provides high quality products and services, innovative development, and custom products.

The Danly product set includes a wide range of guide posts, bushings, die springs, punches, wear plates and cams, and other diemakers' supplies. We also supply customized products to fit our customer specifications.

One of our goals at Danly is to lead the industry in providing products that help customers find solutions to improve their operations. The development of tapping tools provided the opportunity for gains in customer efficiency. These tools allow customers to eliminate the secondary operation of tapping products by allowing them to be tapped in the stamping operation.

To maintain our leadership and reputation, we have invested heavily in state-of-the-art manufacturing facilities.

Danly is the name for trusted solutions and innovation for the global parts forming industry.

The Danly Story

Danly incorporated on August 20, 1923. Although the first "modern" die sets were used as long ago as the late 1800s, Danly revolutionized the industry with the guide post die set. This set, so named for the feature of the pin entering the bushing to guide the punch holder to the proper position, came into its own as a result of the tremendous increase in the use of stampings to meet the urgency of production in WWI. This is the type of die set which is generally used today. When Danly was founded, however, die sets were still being produced in the tool shops of the user, or on special order at job shops.


Danly brought a completely new concept into the manufacture of die sets. This was Danly's now famous "interchangeability" by which Danly die holders of the same center distance are made interchangeable. This method, for the first time, made it possible for the die designer to lay out his dies with absolute certainty that they would fit in the Danly die set specified.

Danly continues to set the standard for die and mold components.

LEMME TELL YA' ALL ABOUT DANLY DIEMAKERS' SUPPLIES

Lemme tell ya' all about 'em . . . how they make die work quicker, easier and better, too . . . how they're precision-made for precision work. And, how complete the Danly line is . . . includes just the right item in just the right size for every kind of job. Bushings, guide posts, dowel pins, die springs, set screws, stripper bolts, toggle clamps, spring retainers, die stops, auto gages, even lubricant. No matter what it is, if a diemaker needs it, Danly makes it—and your Danly distributor has it.

Your salesman or distributor also has a copy of a new booklet for you. It's hot off the press and loaded with information telling you all about all the Danly Diemakers' Supplies. Ask him for a copy!

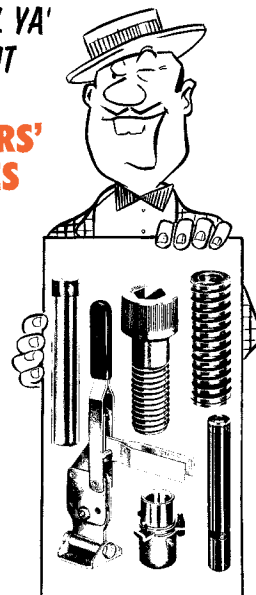

TELL YA'
WHAT
I'M
GONNA
DO....

New 16-page booklet describing the complete line of Danly Diemakers' Supplies is available free from your distributor or salesman—or by writing to the Danly plant.



DANLY
DANLY MACHINE SPECIALTIES, INC.

Danly Products

- Surface Mount Ball Bearing Assemblies
- Plain Bearing Components
- Ball Bearing Guiding Systems: Inch and Metric
- Wear Products
- NAAMS Automotive Pins
- NAAMS Automotive Bushings
- NAAMS Automotive Wear Plates
- NAAMS Guide Blocks and Keeper Blocks
- Aerial & Die Mount Wide Cams
- Box Cams and Bump Cams
- DieMax XL Die Springs
- JIS Die Springs
- Formathane
- Accu-Bend™ & Posi-Bend™ Rotary Benders
- In-Die Tapping
- Die Accessories
- Special Products
- Bronze Plating Services



Table of Contents



General Information	4
Spring Selection Steps	5
ISO Inch Standard	6
Extra Light.	8
Light	9
Medium	10
Heavy	11
Extra Heavy	12
Ultra Heavy	13
ISO Metric Standard	14
Extra Light.	14
Light.	15
Medium	16
Heavy	17
Extra Heavy	18
Ultra Heavy	19
Round Wire	20
JIS	22
Extra Light.	24
Light.	26
Medium	28
Heavy	30
Extra Heavy	32
R Series Inch Standard	35
Medium	36
Medium Heavy	37
Heavy	38
Extra Heavy	39
Spring Accessories	40
Quote Sheet	43

DieMax XL® – Maximum Life Springs

DieMax XL® Maximum Life Springs – springs you can rely on.


A combination of enhanced raw material, optimal spring design, innovative manufacturing processes, and broad distribution channels allow the DieMax XL® spring to yield the best, most dependable performance and availability combination, time after time.

Spring Wire

Danly springs are manufactured from premium spring quality steel. The high tensile strength and superior heat resistance wire characteristics contribute to the low-stress, long life spring design.

Enhanced Design


Our spring starts with a modified trapezoidal cross section and changes to a “D” cross section after coiling. This wire cross section has significantly lower stress levels during compression compared to competitor designs. The “D” cross section also allows for more coils per spring while providing a greater amount of spring travel to solid when compared to competitor springs.



Modified trapezoidal cross section of rectangular wire springs changes to a “D” cross section during coiling to achieve a low stress level that means longer spring life.

Physical Dimensions and Load Ratings

Computer controlled coiling and spring setting equipment allow tight control over the critical spring characteristics. Every manufactured lot of DieMax XL® springs is carefully inspected for hole/rod fit, free length, spring rate, solid height, squareness and physical appearance. All inspection results are recorded and analyzed to ensure compliance to quality standards. These tight tolerances and highly inspected attributes guarantee the springs will work freely over the rods or freely in the holes specified without binding. They also ensure that the free lengths, solid heights and spring loads are compatible from spring to spring and lot to lot for predictable, long-life performance.

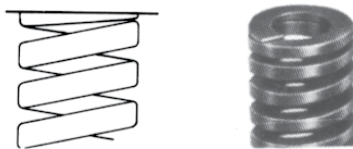

Ends of each spring are closed and ground square to assure that the spring will stand on either end and provide a maximum bearing surface.

Manufacturing Processes

In addition to the optimal, low-stress spring design, the continual investment in the most advanced coiling and spring processing equipment allows Danly to offer a premium, long-life, mechanical spring solution. From the computer controlled spring coilers with in-line SPC data collection, the springs are routed through a series of steps including shot peening to reduce working stresses, and set removal which ensures the spring length and load will not relax in the tool.



Using the latest in CNC coiling technology, springs are produced with much better predictability and consistency in performance, rates and lengths.

Operators use Statistical Process Control (SPC) software to ensure that every production process meets our high quality standards.

Spring testers track and verify consistency in spring dimensions and rates with custom spring testing software.

If the diameter and length are known, turn directly to dimension tables beginning on page 8 to select springs with desired total load.

If diameter and length are not known, use the following seven spring selection steps and refer to the rate column of the dimension tables for spring selection.



In determining the length of a spring, it should be remembered that maximum delivered spring load is obtained by selecting longer springs. For best economy and saving of space, choose Light and Medium Load springs or the Heavy Load spring having a free length equal to six times the travel, or an Extra Heavy Load spring having a free length equal to eight times the travel. If ratios lower than these are used because of height limitations, the number of springs required will be substantially increased.

Step 1

Estimate the level of production required of the die - short run, constant production, etc.


Step 2

Determine compressed spring length "H" and operating travel "T" from the die layout.

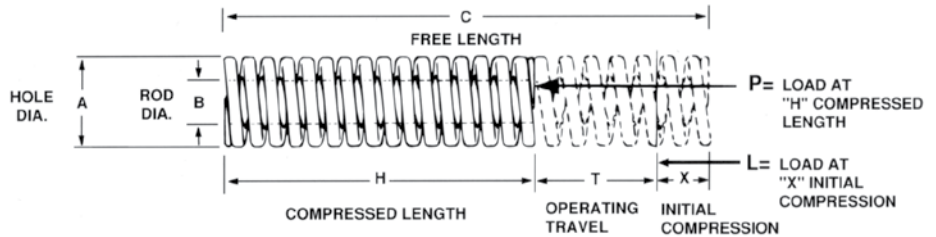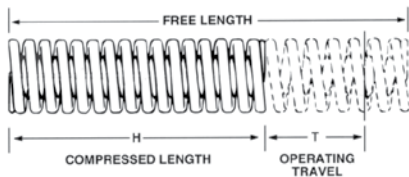


Step 3

Determine free length "C" as follows: Decide which load classification the spring should be selected from: Light, Medium, Heavy, or Extra-Heavy Load. Then choose the figure nearest the compressed length "H" required by the die design from the appropriate charts on page 6. Read corresponding "C" (free length).



Step 4

Estimate total initial spring load "L" required for all springs when springs are compressed "X" inches or millimeters.



Step 5

Determine "X" (initial compression) by using the following formula:

$$X = C - H - T$$

Step 6

Inch: Determine "R" (total rate for all springs in pounds per 1/10 inch) by using the following formula:

$$R = \frac{L}{10 \times X}$$

Metric: Determine "R" (total rate for all springs in newtons per millimeter) by using the following formula:

$$R = \frac{L}{X}$$

Step 7

Select springs as follows:

1. The free length "C" must comply with the length determined in Step 3.
2. Divide "R" in Step 6 by the number of springs to be used (if known) in order to get the rate per spring. Then refer to the following pages for the catalog number of springs having the desired rate. If the number of springs is not known, divide "R" from Step 6 by the rate of the spring you select for the correct number of springs.

Spring Selection Steps

INCH

This chart converts compressed lengths to free lengths.

C Free Length (in)	EXTRA LIGHT LOAD H-Compressed Length (in)			LIGHT LOAD H-Compressed Length (in)			MEDIUM LOAD H-Compressed Length (in)			HEAVY LOAD H-Compressed Length (in)			EXTRA HEAVY LOAD H-Compressed Length (in)			ULTRA HEAVY LOAD H-Compressed Length (in)		
	Long Life 30%	Average Life 40%	Maximum Deflection 50%	Long Life 25%	Average Life 30%	Maximum Deflection 40%	Long Life 25%	Average Life 30%	Maximum Deflection 37.5%	Long Life 20%	Average Life 25%	Maximum Deflection 30%	Long Life 17%	Average Life 20%	Maximum Deflection 25%	Long Life 10%	Average Life 12%	Maximum Deflection 15%
3/4	—	—	—	0.56	0.53	0.45	0.56	0.53	0.47	0.60	0.56	0.53	0.62	0.60	0.56	—	—	—
1	0.70	0.40	0.50	0.75	0.70	0.60	0.75	0.70	0.62	0.80	0.75	0.70	0.83	0.80	0.75	—	—	—
1 1/4	0.88	0.50	0.63	0.94	0.87	0.75	0.94	0.87	0.78	1.00	0.94	0.87	1.04	1.00	0.94	—	—	—
1 1/2	1.05	0.60	0.75	1.12	1.05	0.90	1.12	1.05	0.93	1.20	1.12	1.05	1.25	1.20	1.12	—	—	—
1 3/4	1.23	0.70	0.88	1.31	1.22	1.05	1.31	1.22	1.09	1.40	1.31	1.22	1.45	1.40	1.31	—	—	—
2	1.40	0.80	1.00	1.50	1.40	1.20	1.50	1.40	1.25	1.60	1.50	1.40	1.66	1.60	1.50	—	—	—
2 1/2	1.75	1.00	1.25	1.87	1.75	1.50	1.87	1.75	1.56	2.00	1.87	1.75	2.07	2.00	1.87	2.25	2.20	2.13
3	2.10	1.20	1.50	2.25	2.10	1.80	2.25	2.10	1.87	2.40	2.25	2.10	2.50	2.40	2.25	2.70	2.64	2.55
3 1/2	2.45	1.40	1.75	2.62	2.45	2.10	2.62	2.45	2.18	2.80	2.62	2.45	2.91	2.80	2.62	3.15	3.08	2.98
4	2.80	1.60	2.00	3.00	2.80	2.40	3.00	2.80	2.50	3.20	3.00	2.80	3.33	3.20	3.00	3.60	3.52	3.40
4 1/2	3.15	1.80	2.25	3.37	3.15	2.70	3.37	3.15	2.81	3.60	3.37	3.15	3.75	3.60	3.37	4.05	3.96	3.83
5	3.50	2.00	2.50	3.75	3.50	3.00	3.75	3.50	3.12	4.00	3.75	3.50	4.15	4.00	3.75	4.50	4.40	4.25
5 1/2	3.85	2.20	2.75	4.13	3.85	3.30	4.13	3.85	3.44	4.40	4.13	3.85	4.57	4.40	4.13	—	—	—
6	4.20	2.40	3.00	4.50	4.20	3.60	4.50	4.20	3.75	4.80	4.50	4.20	5.00	4.80	4.50	5.40	5.28	5.10
7	4.90	2.80	3.50	5.25	4.90	4.20	5.25	4.90	4.37	5.60	5.25	4.90	5.83	5.60	5.25	6.30	6.16	5.95
8	5.60	3.20	4.00	6.00	5.60	4.80	6.00	5.60	5.00	6.40	6.00	5.60	6.66	6.40	6.00	7.20	7.04	6.80
9	—	—	—	—	—	—	6.75	6.30	5.62	7.20	6.75	6.30	—	—	—	—	—	—
10	7.00	4.00	5.00	7.50	7.00	6.00	7.50	7.00	6.25	8.00	7.50	7.00	8.30	8.00	7.50	9.00	8.80	8.50
12	8.40	4.80	6.00	9.00	8.40	7.20	9.00	8.40	7.50	9.60	9.00	8.40	10.00	9.60	9.00	10.80	10.56	10.20

METRIC

This chart converts compressed lengths to free lengths.

C Free Length (mm)	EXTRA LIGHT LOAD H-Compressed Length (mm)			LIGHT LOAD H-Compressed Length (mm)			MEDIUM LOAD H-Compressed Length (mm)			HEAVY LOAD H-Compressed Length (mm)			EXTRA HEAVY LOAD H-Compressed Length (mm)			ULTRA HEAVY LOAD H-Compressed Length (mm)		
	Long Life 30%	Average Life 40%	Maximum Deflection 50%	Long Life 25%	Average Life 30%	Maximum Deflection 40%	Long Life 25%	Average Life 30%	Maximum Deflection 37.5%	Long Life 20%	Average Life 25%	Maximum Deflection 30%	Long Life 17%	Average Life 20%	Maximum Deflection 25%	Long Life 10%	Average Life 12%	Maximum Deflection 15%
19	—	—	—	14	13	11	14	13	12	15	14	13	16	15	14	—	—	—
25	18	15	13	19	18	15	19	18	16	20	19	18	21	20	19	—	—	—
32	22	19	16	24	22	19	24	22	20	26	24	22	27	26	24	—	—	—
38	27	23	19	29	27	23	29	27	24	30	29	27	32	30	29	—	—	—
44	31	26	22	33	31	26	33	31	28	35	33	31	37	35	33	—	—	—
51	36	31	26	38	36	31	38	36	32	41	38	36	42	41	38	—	—	—
64	45	38	32	48	45	38	48	45	40	51	48	45	53	51	48	58	56	54
76	53	46	38	57	53	46	57	53	47	61	57	53	63	61	57	68	67	65
89	62	53	45	67	62	53	67	62	56	71	67	62	74	71	67	80	78	76
102	71	61	51	76	71	61	76	71	64	82	76	71	85	82	76	92	90	87
115	81	68	58	86	80	68	86	80	71	91	86	80	95	91	86	104	101	98
127	89	76	64	95	89	76	95	89	79	102	95	89	105	102	95	114	112	108
139	97	84	70	105	98	84	105	98	87	112	105	98	116	112	105	—	—	—
152	106	91	76	114	106	91	114	106	95	122	114	106	126	122	114	137	134	129
178	125	107	89	133	125	107	133	125	111	142	133	125	148	142	133	160	157	151
203	142	122	102	152	142	122	152	142	127	162	152	142	168	162	152	183	179	173
229	—	—	—	—	—	—	172	160	143	183	172	160	—	—	—	—	—	—
254	178	152	127	190	178	152	190	178	159	203	190	178	211	203	190	229	224	216
305	214	183	153	229	213	183	229	213	191	244	229	213	253	244	229	275	268	259

Six load classifications – in standard ISO sizes for dies, jigs, fixtures, and general tool work.

Danly springs are offered in a range of lengths, diameters, and load classifications that conform to the ISO 10243 International Standard and the NAAMS (North American Automotive Metric Standard), including color coding for easy identification of load range.

ISO 9001:2015 Registered Quality

All of our Danly die springs are manufactured to ISO 9001:2015 quality standards consistent with the Danly reputation for providing the stamping industry with the most carefully engineered diemakers'

supplies. Comparison testing of the operating life of Danly die springs and competitive products have shown that Danly springs offer significantly longer life.

The exceptional quality of Danly die springs has made them popular for a wide variety of applications. For example, Danly die springs are commonly used in general tool work, such as jigs and fixtures, as well as in industrial clutches and brakes and as components in farm machinery and aircraft mechanisms. Many manufacturers specify Danly

die springs because the quality and service life of these springs improves the reliability and performance of their products.

Whatever your application might be, you can be sure that the springs you select from this catalog will consistently provide rugged, dependable spring performance. They will live up to the Danly reputation for quality and value.

For help with your selection, or to order die springs, contact Danly or your authorized Danly distributor.



**EXTRA LIGHT
LOAD**
Light Green



**LIGHT
LOAD**
Green



**MEDIUM
LOAD**
Blue



**HEAVY
LOAD**
Red



**EXTRA HEAVY
LOAD**
Yellow



**ULTRA HEAVY
LOAD**
Silver

DieMax XL® Extra Light Load Springs – Inch Standard

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Req'd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (30% of C)		Total Deflection for Avg. Life (40% of C)		Maximum Operating Deflection (50% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
3/4	3/8	1	9-1204-06	16.8	50	0.30	66	0.39	83	0.49	92	0.55
		1 1/4	9-1205-06	12.9	49	0.38	65	0.50	81	0.63	93	0.72
		1 1/2	9-1206-06	10.6	48	0.45	64	0.60	79	0.75	92	0.87
		1 3/4	9-1207-06	9.0	47	0.52	62	0.69	78	0.87	92	1.02
		2	9-1208-06	7.8	47	0.60	63	0.80	79	1.00	93	1.19
		2 1/2	9-1210-06	6.5	49	0.76	65	1.01	81	1.26	99	1.53
		3	9-1212-06	5.6	50	0.90	67	1.20	84	1.50	104	1.85
		3 1/2	9-1214-06	4.7	50	1.05	66	1.40	83	1.75	103	2.19
		4	9-1216-06	4.2	51	1.20	68	1.61	85	2.01	106	2.53
		4 1/2	9-1218-06	3.7	50	1.36	66	1.81	83	2.26	106	2.87
		5	9-1220-06	3.4	51	1.50	68	2.00	84	2.50	108	3.18
		5 1/2	9-1222-06	3.1	51	1.64	68	2.19	84	2.74	108	3.48
1	1/2	6	9-1224-06	2.8	50	1.80	67	2.39	84	2.99	107	3.81
		12	9-1248-06	1.4	52	3.60	69	4.80	86	6.00	108	7.73
		1	9-1604-06	30.8	91	0.30	121	0.39	152	0.49	157	0.51
		1 1/4	9-1605-06	24.1	91	0.38	122	0.50	152	0.63	164	0.68
		1 1/2	9-1606-06	20.5	92	0.45	122	0.60	153	0.75	166	0.81
		1 3/4	9-1607-06	17.9	93	0.52	124	0.69	155	0.87	172	0.96
		2	9-1608-06	15.4	93	0.60	124	0.80	155	1.00	172	1.12
		2 1/2	9-1610-06	12.3	93	0.76	124	1.01	155	1.26	177	1.44
		3	9-1612-06	10.3	93	0.90	124	1.20	155	1.50	178	1.73
		3 1/2	9-1614-06	8.7	91	1.05	122	1.40	152	1.75	176	2.02
		4	9-1616-06	7.5	91	1.20	121	1.61	151	2.01	175	2.33
		4 1/2	9-1618-06	6.7	92	1.36	122	1.81	153	2.26	178	2.65
1 1/4	5/8	5	9-1620-06	6.1	91	1.50	121	2.00	151	2.50	179	2.93
		5 1/2	9-1622-06	5.5	90	1.64	120	2.19	150	2.74	177	3.21
		6	9-1624-06	5.0	90	1.80	120	2.39	151	2.99	176	3.52
		7	9-1628-06	4.3	91	2.10	122	2.80	152	3.50	178	4.15
		8	9-1632-06	3.8	92	2.40	122	3.20	153	4.00	181	4.75
		12	9-1648-06	2.5	91	3.60	121	4.80	151	6.00	180	7.18
		1 1/2	9-2006-06	24.6	110	0.45	147	0.60	184	0.75	192	0.78
		1 3/4	9-2007-06	21.3	111	0.52	148	0.69	185	0.87	198	0.93
		2	9-2008-06	18.5	112	0.60	149	0.80	186	1.00	202	1.09
		2 1/2	9-2010-06	14.6	110	0.76	147	1.01	184	1.26	203	1.39
		3	9-2012-06	12.3	111	0.90	148	1.20	185	1.50	205	1.67
		3 1/2	9-2014-06	10.3	109	1.05	145	1.40	181	1.75	203	1.97
1 1/2	3/4	4	9-2016-06	9.0	108	1.20	144	1.61	180	2.01	204	2.27
		4 1/2	9-2018-06	8.1	110	1.36	147	1.81	184	2.26	209	2.58
		5	9-2020-06	7.3	109	1.50	145	2.00	181	2.50	208	2.85
		5 1/2	9-2022-06	6.6	109	1.64	145	2.19	181	2.74	207	3.13
		6	9-2024-06	6.1	109	1.80	145	2.39	181	2.99	210	3.44
		7	9-2028-06	5.1	108	2.10	144	2.80	180	3.50	207	4.05
		8	9-2032-06	4.5	107	2.40	142	3.20	178	4.00	208	4.63
		10	9-2040-06	3.7	110	3.00	146	4.00	183	5.00	216	5.83
		12	9-2048-06	3.0	109	3.60	146	4.80	182	6.00	211	7.02

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Req'd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (30% of C)		Total Deflection for Avg. Life (40% of C)		Maximum Operating Deflection (50% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
1 1/2	3/4	2	9-2408-06	27.5	166	0.60	221	0.80	276	1.00	303	1.10
		2 1/2	9-2410-06	22.4	169	0.76	226	1.01	282	1.26	320	1.43
		3	9-2412-06	19.0	171	0.90	228	1.20	285	1.50	327	1.72
		3 1/2	9-2414-06	16.2	171	1.05	227	1.40	284	1.75	330	2.04
		4	9-2416-06	14.0	169	1.20	225	1.61	281	2.01	329	2.35
		4 1/2	9-2418-06	12.6	171	1.36	229	1.81	286	2.26	336	2.67
		5	9-2420-06	11.2	168	1.50	224	2.00	280	2.50	332	2.96
		5 1/2	9-2422-06	10.1	166	1.64	221	2.19	277	2.74	327	3.24
		6	9-2424-06	9.3	166	1.80	222	2.39	277	2.99	332	3.57
		7	9-2428-06	7.8	165	2.10	219	2.80	274	3.50	327	4.19
		8	9-2432-06	7.0	169	2.40	225	3.20	281	4.00	337	4.81
		10	9-2440-06	5.6	168	3.00	224	4.00	280	5.00	339	6.05
		12	9-2448-06	4.7	171	3.60	228	4.80	285	6.00	343	7.30
2	1	2 1/2	9-3210-06	49.3	373	0.76	497	1.01	621	1.26	680	1.38
		3	9-3212-06	40.3	362	0.90	483	1.20	604	1.50	669	1.66
		3 1/2	9-3214-06	34.2	359	1.05	479	1.40	599	1.75	677	1.98
		4	9-3216-06	29.7	358	1.20	477	1.61	597	2.01	683	2.30
		4 1/2	9-3218-06	26.3	358	1.36	477	1.81	596	2.26	684	2.60
		5	9-3220-06	24.1	362	1.50	482	2.00	603	2.50	701	2.91
		5 1/2	9-3222-06	21.8	358	1.64	478	2.19	597	2.74	695	3.19
		6	9-3224-06	19.6	352	1.80	469	2.39	587	2.99	686	3.50
		7	9-3228-06	16.8	353	2.10	471	2.80	589	3.50	697	4.15
		8	9-3232-06	14.6	349	2.40	466	3.20	582	4.00	694	4.75
		10	9-3240-06	11.8	353	3.00	471	4.00	589	5.00	707	5.99
		12	9-3248-06	9.8	354	3.60	472	4.80	590	6.00	709	7.23




Product Features:

- ◆ Color – Light Green
- ◆ High tensile strength chrome silicon
- ◆ Optimal rectangular wire design
- ◆ Long life design

DieMax XL® Ultra Heavy Load Springs – Inch Standard

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Req'd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (10% of C)		Total Deflection for Avg. Life (12% of C)		Maximum Operating Deflection (15% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
1	1/2	2 1/2	9-1610-51	368.0	927	0.25	1116	0.30	1391	0.38	1877	0.51
		3	9-1612-51	317.8	951	0.30	1139	0.36	1426	0.45	2002	0.63
		3 1/2	9-1614-51	264.0	925	0.35	1112	0.42	1388	0.53	2086	0.79
		4	9-1616-51	222.9	895	0.40	1071	0.48	1343	0.60	2028	0.91
		4 1/2	9-1618-51	205.7	932	0.45	1118	0.54	1397	0.68	2098	1.02
		5	9-1620-51	186.3	932	0.50	1115	0.60	1397	0.75	2049	1.10
		6	9-1624-51	145.7	872	0.60	1044	0.72	1308	0.90	1952	1.34
		7	9-1628-51	131.4	921	0.70	1107	0.84	1382	1.05	2024	1.54
		8	9-1632-51	115.4	923	0.80	1109	0.96	1384	1.20	2043	1.77
		12	9-1648-51	77.7	933	1.20	1120	1.44	1400	1.80	1927	2.48
1 1/4	5/8	2 1/2	9-2010-51	615.5	1551	0.25	1861	0.30	2326	0.38	3139	0.51
		3	9-2012-51	499.5	1494	0.30	1793	0.36	2242	0.45	3147	0.63
		3 1/2	9-2014-51	412.1	1444	0.35	1733	0.43	2166	0.53	3256	0.79
		4	9-2016-51	354.3	1423	0.39	1708	0.47	2134	0.60	3224	0.91
		4 1/2	9-2018-51	320.0	1449	0.47	1739	0.55	2174	0.68	3264	1.02
		5	9-2020-51	283.5	1417	0.51	1701	0.59	2126	0.75	3119	1.10
		6	9-2024-51	233.2	1395	0.59	1674	0.71	2093	0.90	3125	1.34
		7	9-2028-51	201.7	1413	0.71	1696	0.83	2120	1.05	3106	1.54
		8	9-2032-51	173.7	1388	0.79	1666	0.94	2083	1.20	3074	1.77
		10	9-2040-51	138.9	1390	0.98	1668	1.18	2085	1.50	3389	2.44
		12	9-2048-51	112.0	1345	1.22	1614	1.46	2018	1.80	3304	2.95

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Req'd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (10% of C)		Total Deflection for Avg. Life (12% of C)		Maximum Operating Deflection (15% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
1 1/2	3/4	3 1/2	9-2414-51	502.9	1762	0.35	2119	0.42	2643	0.53	3973	0.79
		4	9-2416-51	435.5	1749	0.40	2092	0.48	2623	0.60	3963	0.91
		4 1/2	9-2418-51	388.0	1757	0.45	2108	0.54	2635	0.68	3958	1.02
		5	9-2420-51	355.5	1777	0.50	2127	0.60	2666	0.75	3911	1.10
		6	9-2424-51	290.9	1741	0.90	2084	0.72	2611	0.90	4131	1.42
		7	9-2428-51	245.2	1718	0.70	2066	0.84	2577	1.05	4144	1.69
		8	9-2432-51	213.7	1708	0.80	2053	0.96	2562	1.20	4124	1.93
		10	9-2440-51	169.2	1692	1.00	2031	1.20	2538	1.50	4128	2.44
		12	9-2448-51	140.6	1694	1.20	2026	1.44	2532	1.80	4148	2.95
2	1	3 1/2	9-3214-51	805.8	2824	0.35	3395	0.42	4235	0.53	6044	0.75
		4	9-3216-51	694.4	2788	0.40	3335	0.48	4183	0.60	6041	0.87
		4 1/2	9-3218-51	614.9	2784	0.45	3341	0.54	4176	0.68	6026	0.98
		5	9-3220-51	553.2	2766	0.50	3311	0.60	4149	0.75	6085	1.10
		6	9-3224-51	460.6	2756	0.60	3301	0.72	4135	0.90	6172	1.34
		7	9-3228-51	398.9	2795	0.70	3361	0.84	4193	1.05	6263	1.57
		8	9-3232-51	349.8	2795	0.80	3360	0.96	4193	1.20	6191	1.77
		10	9-3240-51	269.7	2698	1.00	3239	1.20	4046	1.50	6149	2.28
		12	9-3248-51	221.7	2663	1.20	3195	1.44	3994	1.80	6119	2.76



Product Features:

- ◆ Color – Silver
- ◆ High tensile strength chrome silicon
- ◆ Optimal rectangular wire design
- ◆ Long life design

Note: All springs are available unpainted by adding the suffix "NP" to the end of the part number.

DieMax XL® Extra Light Load Springs – Metric Standard

Hole Diam. (mm) A	Rod Diam. (mm) B	Free Length (mm) C	CATALOG NUMBER	RATE Newtons Reqd. to deflect 1 mm	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (30% of C)		Total Deflection for Avg. Life (40% of C)		Maximum Operating Deflection (50% of C)		Total Travel to Solid	
					Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm
20	8	25	9-1204-06	29.4	221	7.5	294	10.0	368	12.5	409	13.9
		32	9-1205-06	22.6	217	9.6	289	12.8	362	16.0	411	18.2
		38	9-1206-06	18.6	212	11.4	283	15.2	353	19.0	409	22.0
		44	9-1207-06	15.7	207	13.2	276	17.6	345	22.0	405	25.8
		51	9-1208-06	13.7	210	15.3	279	20.4	349	25.5	415	30.3
		64	9-1210-06	11.3	217	19.2	289	25.6	362	32.0	440	38.9
		76	9-1212-06	9.8	223	22.8	298	30.4	372	38.0	461	47.0
		89	9-1214-06	8.3	222	26.7	295	35.6	369	44.5	462	55.7
		102	9-1216-06	7.4	226	30.6	302	40.8	377	51.0	475	64.2
		115	9-1218-06	6.4	221	34.5	294	46.0	368	57.5	467	72.9
		127	9-1220-06	5.9	225	38.1	300	50.8	375	63.5	476	80.7
		139	9-1222-06	5.4	225	41.7	300	55.6	375	69.5	477	88.4
		152	9-1224-06	4.9	223	45.6	298	60.8	372	76.0	474	96.7
		305	9-1248-06	2.5	229	91.5	305	122	381	153	490	196
25	12.5	25	9-1604-06	53.9	404	7.5	539	10.0	674	12.5	695	12.9
		32	9-1605-06	42.2	405	9.6	540	12.8	675	16.0	726	17.2
		38	9-1606-06	35.8	408	11.4	544	15.2	680	19.0	741	20.7
		44	9-1607-06	31.4	414	13.2	553	17.6	691	22.0	766	24.4
		51	9-1608-06	27.0	413	15.3	551	20.4	689	25.5	770	28.5
		64	9-1610-06	21.6	415	19.2	553	25.6	691	32.0	788	36.5
		76	9-1612-06	18.1	413	22.8	550	30.4	688	38.0	795	43.9
		89	9-1614-06	15.2	406	26.7	541	35.6	676	44.5	781	51.4
		102	9-1616-06	13.2	404	30.6	539	40.8	673	51.0	783	59.3
		115	9-1618-06	11.8	407	34.5	543	46.0	679	57.5	793	67.2
		127	9-1620-06	10.6	404	38.1	538	50.8	673	63.5	789	74.4
		139	9-1622-06	9.6	400	41.7	534	55.6	667	69.5	783	81.6
		152	9-1624-06	8.8	401	45.6	535	60.8	669	76.0	788	89.5
		178	9-1628-06	7.6	406	53.4	541	71.2	676	89.0	798	105
		203	9-1632-06	6.7	408	60.9	544	81.2	680	102	811	121
32	16	305	9-1648-06	4.4	403	91.5	537	122	671	153	801	182
		38	9-2006-06	43.1	491	11.4	655	15.2	819	19.0	858	19.9
		44	9-2007-06	37.3	492	13.2	656	17.6	821	22.0	877	23.5
		51	9-2008-06	32.4	496	15.3	661	20.4	826	25.5	894	27.6
		64	9-2010-06	25.5	490	19.2	653	25.6	816	32.0	898	35.2
		76	9-2012-06	21.6	492	22.8	657	30.4	821	38.0	916	42.4
		89	9-2014-06	18.1	483	26.7	644	35.6	805	44.5	905	50.0
		102	9-2016-06	15.7	480	30.6	641	40.8	801	51.0	904	57.6
		115	9-2018-06	14.2	490	34.5	653	46.0	817	57.5	930	65.5
		127	9-2020-06	12.7	484	38.1	645	50.8	806	63.5	921	72.5
		139	9-2022-06	11.6	484	41.7	645	55.6	806	69.5	921	79.4
		152	9-2024-06	10.6	483	45.6	644	60.8	806	76.0	925	87.3
		178	9-2028-06	9.0	481	53.4	641	71.2	801	89.0	927	103
		203	9-2032-06	7.8	475	60.9	633	81.2	792	102	920	118
		254	9-2040-06	6.4	488	76.2	650	102	813	127	947	148
		305	9-2048-06	5.3	485	91.5	647	122	808	153	943	178

Hole Diam. (mm) A	Rod Diam. (mm) B	Free Length (mm) C	CATALOG NUMBER	RATE Newtons Reqd. to deflect 1 mm	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (30% of C)		Total Deflection for Avg. Life (40% of C)		Maximum Operating Deflection (50% of C)		Total Travel to Solid	
					Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm
40	20	51	9-2408-06	48.1	736	15.3	981	20.4	1227	25.5	1347	28.0
		64	9-2410-06	39.2	753	19.2	1004	25.6	1254	32.0	1419	36.2
		76	9-2412-06	33.3	759	22.8	1012	30.4	1265	38.0	1455	43.7
		89	9-2414-06	28.4	758	26.7	1011	35.6	1264	44.5	1468	51.7
		102	9-2416-06	24.5	750	30.6	1000	40.8	1250	51.0	1465	59.8
		115	9-2418-06	22.1	762	34.5	1017	46.0	1271	57.5	1501	67.9
		127	9-2420-06	19.6	747	38.1	996	50.8	1245	63.5	1474	75.2
		139	9-2422-06	17.7	738	41.7	984	55.6	1230	69.5	1458	82.4
		152	9-2424-06	16.2	739	45.6	985	60.8	1231	76.0	1468	90.6
		178	9-2428-06	13.7	732	53.4	975	71.2	1219	89.0	1452	106
		203	9-2432-06	12.3	749	60.9	999	81.2	1248	101	1501	122
		254	9-2440-06	9.8	747	76.2	996	102	1245	127	1509	154
		305	9-2448-06	8.3	759	91.5	1013	122	1266	152	1536	185
50	25	64	9-3210-06	86.3	1657	19.2	2209	25.6	2762	32.0	3029	35.1
		76	9-3212-06	70.6	1610	22.8	2146	30.4	2683	38.0	2979	42.2
		89	9-3214-06	59.8	1597	26.7	2129	35.6	2661	44.5	3008	50.3
		102	9-3216-06	52.0	1591	30.6	2122	40.8	2652	51.0	3037	58.4
		115	9-3218-06	46.1	1590	34.5	2121	46.0	2651	57.5	3047	66.1
		127	9-3220-06	42.2	1608	38.1	2144	50.8	2680	63.5	3114	73.8
		139	9-3222-06	38.2	1593	41.7	2124	55.6	2655	69.5	3090	80.9
		152	9-3224-06	34.3	1564	45.6	2085	60.8	2607	76.0	3053	89.0
		178	9-3228-06	29.4	1570	53.4	2093	71.2	2617	89.0	3087	105
		203	9-3232-06	25.5	1553	60.9	2071	81.2	2588	101	3086	121
		254	9-3240-06	20.6	1570	76.2	2093	102	2616	127	3131	152
		305	9-3248-06	17.2	1574	91.5	2098	122	2623	152	3165	184

*Note: 1 Newton=0.10197 Kg (Force)



Product Features:

- ◆ Color – Light Green
- ◆ High tensile strength chrome silicon
- ◆ Optimal rectangular wire design
- ◆ Long life design

DieMax XL® Ultra Heavy Load Springs – Metric Standard

Hole Diam. (mm) A	Rod Diam. (mm) B	Free Length (mm) C	CATALOG NUMBER	RATE Newtons Reqd. to deflect 1 mm	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (10% of C)		Total Deflection for Avg. Life (12% of C)		Maximum Operating Deflection (15% of C)		Total Travel to Solid	
					Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm
25	12.5	64	9-1610-51	644	4122	6.4	4959	7.7	6182	9.6	8372	13
		76	9-1612-51	556	4226	7.6	5060	9.1	6338	11.4	8896	16
		89	9-1614-51	462	4112	8.9	4943	10.7	6168	13.4	9240	20
		102	9-1616-51	390	3978	10.2	4758	12.2	5967	15.3	8970	23
		115	9-1618-51	360	4140	11.5	4968	13.8	6210	17.3	9360	26
		127	9-1620-51	326	4140	12.7	4955	15.2	6210	19.1	9128	28
		152	9-1624-51	255	3876	15.2	4641	18.2	5814	22.8	8670	34
		178	9-1628-51	230	4094	17.8	4922	21.4	6141	26.7	8970	39
		203	9-1632-51	202	4101	20.3	4929	24.4	6151	30.5	9090	45
		305	9-1648-51	136	4148	30.5	4978	36.6	6222	45.8	8568	63
32	16	64	9-2010-51	1077	6892	6.4	8270	7.7	10337	9.6	14001	13
		76	9-2012-51	874	6642	7.6	7971	9.1	9964	11.4	13984	16
		89	9-2014-51	721	6419	8.9	7702	10.7	9628	13.4	14420	20
		102	9-2016-51	620	6324	10.2	7589	12.2	9486	15.3	14260	23
		115	9-2018-51	560	6440	11.5	7728	13.8	9660	17.3	14560	26
		127	9-2020-51	496	6299	12.7	7559	15.2	9449	19.1	13888	28
		152	9-2024-51	408	6202	15.2	7442	18.2	9302	22.8	13872	34
		178	9-2028-51	353	6280	17.8	7536	21.4	9420	26.7	13767	39
		203	9-2032-51	304	6171	20.3	7405	24.4	9257	30.5	13680	45
		254	9-2040-51	243	6177	25.4	7413	30.5	9266	38.1	15066	62
		305	9-2048-51	196	5978	30.5	7174	36.6	8967	45.8	14700	75

*Note: 1 Newton=0.10197 Kg (Force)

Hole Diam. (mm) A	Rod Diam. (mm) B	Free Length (mm) C	CATALOG NUMBER	RATE Newtons Reqd. to deflect 1 mm	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (10% of C)		Total Deflection for Avg. Life (12% of C)		Maximum Operating Deflection (15% of C)		Total Travel to Solid	
					Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm	Load N	Defl. mm
40	20	89	9-2414-51	880	7832	8.9	9416	10.7	11748	13.4	17600	20
		102	9-2416-51	762	7772	10.2	9296	12.2	11659	15.3	17526	23
		115	9-2418-51	679	7809	11.5	9370	13.8	11713	17.3	17654	26
		127	9-2420-51	622	7899	12.7	9454	15.2	11849	19.1	17416	28
		152	9-2424-51	509	7737	15.2	9264	18.2	11605	22.8	18324	36
		178	9-2428-51	429	7636	17.8	9181	21.4	11454	26.7	18447	43
		203	9-2432-51	374	7592	20.3	9126	24.4	11388	30.5	18326	49
		254	9-2440-51	296	7518	25.4	9028	30.5	11278	38.1	18352	62
		305	9-2448-51	246	7530	30.5	9004	36.6	11255	45.8	18450	75
50	25	89	9-3214-51	1410	12549	8.9	15087	10.7	18824	13.4	26790	19
		102	9-3216-51	1215	12393	10.2	14823	12.2	18590	15.3	26730	22
		115	9-3218-51	1076	12374	11.5	14849	13.8	18561	17.3	26900	25
		127	9-3220-51	968	12294	12.7	14714	15.2	18440	19.1	27104	28
		152	9-3224-51	806	12251	15.2	14669	18.2	18377	22.8	27404	34
		178	9-3228-51	698	12424	17.8	14937	21.4	18637	26.7	27920	40
		203	9-3232-51	612	12424	20.3	14933	24.4	18635	30.5	27540	45
		254	9-3240-51	472	11989	25.4	14396	30.5	17983	38.1	27376	58
		305	9-3248-51	388	11834	30.5	14201	36.6	17751	45.8	27160	70



Product Features:

- ◆ Color – Silver
- ◆ High tensile strength chrome silicon
- ◆ Optimal rectangular wire design
- ◆ Long life design


Note: All springs are available unpainted by adding the suffix "NP" to the end of the part number.

DieMax XL® Light Load Springs – Inch Round Wire

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Reqd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (25% of C)		Total Deflection for Avg. Life (30% of C)		Maximum Operating Deflection (40% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
3/8	3/16	3/4	9-0603-119	3.35	6	0.19	8	0.23	10	0.30	13	0.39
		1	9-0604-119	2.52	6	0.25	8	0.30	10	0.40	13	0.52
		1 1/4	9-0605-119	1.96	6	0.31	7	0.38	10	0.50	13	0.65
		1 1/2	9-0606-119	1.59	6	0.38	7	0.45	10	0.60	12	0.78
		1 3/4	9-0607-119	1.35	6	0.44	7	0.53	9	0.70	12	0.91
		2	9-0608-119	1.19	6	0.50	7	0.60	9	0.80	13	1.06
		2 1/2	9-0610-119	0.93	6	0.63	7	0.75	9	1.00	12	1.31
		3	9-0612-119	0.76	6	0.75	7	0.90	9	1.20	12	1.56
1/2	9/32	12	9-0648-119	0.18	5	3.00	7	3.60	9	4.80	11	6.19
		3/4	9-0803-119	6.45	12	0.19	15	0.23	19	0.30	24	0.37
		1	9-0804-119	4.88	12	0.25	15	0.30	20	0.40	26	0.53
		1 1/4	9-0805-119	3.71	12	0.31	14	0.38	19	0.50	25	0.66
		1 1/2	9-0806-119	3.04	11	0.38	14	0.45	18	0.60	24	0.80
		1 3/4	9-0807-119	2.54	11	0.44	13	0.53	18	0.70	24	0.94
		2	9-0808-119	2.17	11	0.5	13	0.60	17	0.80	23	1.06
		2 1/2	9-0810-119	1.68	11	0.63	13	0.75	17	1.00	22	1.31
5/8	11/32	3	9-0812-119	1.43	11	0.75	13	0.90	17	1.20	23	1.62
		3 1/2	9-0814-119	1.22	11	0.88	13	1.05	17	1.40	23	1.90
		12	9-0848-119	0.34	10	3.00	12	3.60	16	4.80	21	6.41
		3/4	9-1003-119	13.50	25	0.19	30	0.23	41	0.30	58	0.43
		1	9-1004-119	10.2	25	0.25	31	0.30	41	0.40	59	0.58
		1 1/4	9-1005-119	7.7	24	0.31	29	0.38	38	0.50	56	0.73
		1 1/2	9-1006-119	6.0	23	0.38	27	0.45	36	0.60	53	0.88
		1 3/4	9-1007-119	5.0	22	0.44	26	0.53	35	0.70	51	1.02
		2	9-1008-119	4.33	22	0.50	26	0.60	35	0.80	51	1.18
		2 1/2	9-1010-119	3.38	21	0.63	25	0.75	34	1.00	50	1.49
		3	9-1012-119	2.73	20	0.75	25	0.90	33	1.20	49	1.78
		3 1/2	9-1014-119	2.31	20	0.88	24	1.05	32	1.40	48	2.08
		4	9-1016-119	2.01	20	1.00	24	1.20	32	1.60	48	2.39
		12	9-1048-119	0.64	19	3.00	23	3.60	31	4.80	46	7.24

Product Features:

- ◆ Manufactured with Chromium Alloy steel
- ◆ Uniform hole and rod sizes matched to conventional sizes
- ◆ SPC quality assurance
- ◆ Our quality means extra long life and reliable performance

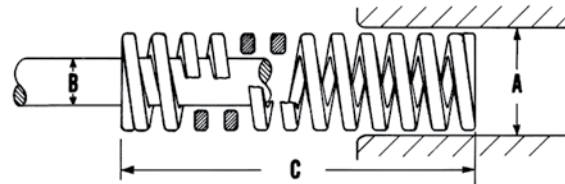

DieMax XL® Medium Load Springs – Inch Round Wire

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Reqd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (25% of C)		Total Deflection for Avg. Life (30% of C)		Maximum Operating Deflection (37.5% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
3/8	3/16	3/4	9-0603-219	10.0	19	0.19	23	0.23	28	0.28	31	0.31
		1	9-0604-219	7.3	18	0.25	22	0.30	28	0.38	30	0.41
		1 1/4	9-0605-219	5.7	18	0.31	22	0.38	27	0.47	30	0.52
		1 1/2	9-0606-219	4.7	18	0.38	21	0.45	26	0.56	30	0.63
		1 3/4	9-0607-219	4.0	18	0.44	21	0.53	26	0.66	29	0.73
		2	9-0608-219	3.5	18	0.50	21	0.60	26	0.75	29	0.83
		2 1/2	9-0610-219	2.75	17	0.63	21	0.75	26	0.94	29	1.04
		3	9-0612-219	2.3	17	0.75	21	0.90	26	1.13	29	1.25
		12	9-0648-219	0.57	17	3.00	21	3.60	26	4.50	29	5.06
1/2	9/32	3/4	9-0803-219	16.5	31	0.19	37	0.23	46	0.28	53	0.32
		1	9-0804-219	12.4	31	0.25	37	0.30	47	0.38	54	0.44
		1 1/4	9-0805-219	9.6	30	0.31	36	0.38	45	0.47	53	0.55
		1 1/2	9-0806-219	7.9	30	0.38	36	0.45	45	0.56	54	0.68
		1 3/4	9-0807-219	6.6	29	0.44	35	0.53	43	0.66	51	0.78
		2	9-0808-219	5.7	29	0.5	34	0.60	43	0.75	52	0.90
		2 1/2	9-0810-219	4.45	28	0.63	33	0.75	42	0.94	50	1.12
		3	9-0812-219	3.66	27	0.75	33	0.90	41	1.13	49	1.35
		3 1/2	9-0814-219	3.21	28	0.88	34	1.05	42	1.31	52	1.63
		12	9-0848-219	0.88	26	3.00	32	3.60	40	4.50	48	5.49
5/8	11/32	3/4	9-1003-219	24.0	45	0.19	54	0.23	68	0.28	74	0.31
		1	9-1004-219	18.2	46	0.25	55	0.30	68	0.38	78	0.43
		1 1/4	9-1005-219	13.7	43	0.31	51	0.38	64	0.47	74	0.54
		1 1/2	9-1006-219	11.1	42	0.38	50	0.45	62	0.56	72	0.65
		1 3/4	9-1007-219	9.2	40	0.44	48	0.53	61	0.66	70	0.76
		2	9-1008-219	7.90	40	0.50	47	0.60	59	0.75	69	0.87
		2 1/2	9-1010-219	6.10	38	0.63	46	0.75	58	0.94	66	1.08
		3	9-1012-219	5.00	38	0.75	45	0.90	57	1.13	65	1.30
		3 1/2	9-1014-219	4.28	37	0.88	45	1.05	56	1.31	65	1.52
		4	9-1016-219	3.73	37	1.00	45	1.20	56	1.50	65	1.75
		12	9-1048-219	1.19	36	3.00	43	3.60	54	4.50	63	5.26

DieMax XL® Heavy Load Springs – Inch Round Wire

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	CATALOG NUMBER	RATE Pounds Reqd. to deflect 1/10 in.	LOAD-DEFLECTION TABLE							
					Total Deflection for Long Life (20% of C)		Total Deflection for Avg. Life (25% of C)		Maximum Operating Deflection (30% of C)		Total Travel to Solid	
					Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.
3/8	3/16	3/4	9-0603-269	15.7	24	0.15	29	0.19	35	0.23	39	0.25
		1	9-0604-269	11.8	24	0.20	29	0.25	35	0.30	40	0.34
		1 1/4	9-0605-269	9.2	23	0.25	29	0.31	34	0.38	40	0.43
		1 1/2	9-0606-269	7.4	22	0.30	28	0.38	33	0.45	38	0.52
		1 3/4	9-0607-269	6.2	22	0.35	27	0.44	32	0.53	36	0.58
		2	9-0608-269	5.5	22	0.40	27	0.50	33	0.60	38	0.70
		2 1/2	9-0610-269	4.38	22	0.50	27	0.63	33	0.75	39	0.90
		3	9-0612-269	3.59	22	0.60	27	0.75	32	0.90	38	1.06
		12	9-0648-269	0.87	21	2.40	26	3.00	31	3.60	38	4.32
1/2	9/32	3/4	9-0803-269	28.5	43	0.15	53	0.19	64	0.23	71	0.25
		1	9-0804-269	21.4	43	0.20	54	0.25	64	0.30	75	0.35
		1 1/4	9-0805-269	16.5	41	0.25	52	0.31	62	0.38	73	0.44
		1 1/2	9-0806-269	13.4	40	0.30	50	0.38	60	0.45	72	0.54
		1 3/4	9-0807-269	11.2	39	0.35	49	0.44	59	0.53	70	0.62
		2	9-0808-269	9.9	39	0.40	49	0.50	59	0.60	73	0.74
		2 1/2	9-0810-269	7.7	39	0.50	48	0.63	58	0.75	72	0.93
		3	9-0812-269	6.4	38	0.60	48	0.75	57	0.90	71	1.12
		3 1/2	9-0814-269	5.4	38	0.70	47	0.88	57	1.05	71	1.30
		12	9-0848-269	1.52	36	2.40	46	3.00	55	3.60	68	4.49
5/8	11/32	3/4	9-1003-269	62.0	93	0.15	116	0.19	140	0.23	161	0.26
		1	9-1004-269	46.6	93	0.20	117	0.25	140	0.30	168	0.36
		1 1/4	9-1005-269	35.0	87	0.25	109	0.31	131	0.38	159	0.45
		1 1/2	9-1006-269	28.5	86	0.30	107	0.38	128	0.45	160	0.56
		1 3/4	9-1007-269	23.3	82	0.35	102	0.44	122	0.53	149	0.64
		2	9-1008-269	20.3	81	0.40	101	0.50	122	0.60	151	0.74
		2 1/2	9-1010-269	15.9	79	0.50	99	0.63	119	0.75	149	0.94
		3	9-1012-269	13.0	78	0.60	98	0.75	117	0.90	149	1.14
		3 1/2	9-1014-269	11.2	78	0.70	98	0.88	117	1.05	151	1.35
		4	9-1016-269	9.7	77	0.80	97	1.00	116	1.20	150	1.55
		12	9-1048-269	3.09	74	2.40	93	3.00	111	3.60	145	4.68

Note: All springs are available unpainted by adding the suffix "NP" to the end of the part number.

JIS Spring Selection Steps

JIS

This chart converts compressed lengths to free lengths.

C Free Length (mm)	EXTRA LIGHT LOAD H-Compressed Length (mm)			LIGHT LOAD H-Compressed Length (mm)			MEDIUM LOAD H-Compressed Length (mm)			HEAVY LOAD H-Compressed Length (mm)			EXTRA HEAVY LOAD H-Compressed Length (mm)		
	Long Life 40%	Average Life 45%	Maximum Deflection 50%	Long Life 32%	Average Life 36%	Maximum Deflection 40%	Long Life 25.6%	Average Life 28.8%	Maximum Deflection 32%	Long Life 19.2%	Average Life 21.6%	Maximum Deflection 24%	Long Life 16%	Average Life 18%	Maximum Deflection 20%
20	12.0	11.0	10.0	13.6	12.8	12.0	14.9	14.2	13.6	16.2	15.7	15.2	16.8	16.4	16.0
25	15.0	13.8	12.5	17.0	16.0	15.0	18.6	17.8	17.0	20.2	19.6	19.0	21.0	20.5	20.0
30	18.0	16.5	15.0	20.4	19.2	18.0	22.3	21.4	20.4	24.2	23.5	22.8	25.2	24.6	24.0
35	21.0	19.3	17.5	23.8	22.4	21.0	26.0	24.9	23.8	28.3	27.4	26.6	29.4	28.7	28.0
40	24.0	22.0	20.0	27.2	25.6	24.0	29.8	28.5	27.2	32.3	31.4	30.4	33.6	32.8	32.0
45	27.0	24.8	22.5	30.6	28.8	27.0	33.5	32.0	30.6	36.4	35.3	34.2	37.8	36.9	36.0
50	30.0	27.5	25.0	34.0	32.0	30.0	37.2	35.6	34.0	40.4	39.2	38.0	42.0	41.0	40.0
55	33.0	30.3	27.5	37.4	35.2	33.0	40.9	39.2	37.4	44.4	43.1	41.8	46.2	45.1	44.0
60	36.0	33.0	30.0	40.8	38.4	36.0	44.6	42.7	40.8	48.5	47.0	45.6	50.4	49.2	48.0
65	39.0	35.8	32.5	44.2	41.6	39.0	48.4	46.3	44.2	52.5	51.0	49.4	54.6	53.3	52.0
70	42.0	38.5	35.0	47.6	44.8	42.0	52.1	49.8	47.6	56.6	54.9	53.2	58.8	57.4	56.0
75	45.0	41.3	37.5	51.0	48.0	45.0	55.8	53.4	51.0	60.6	58.8	57.0	63.0	61.5	60.0
80	48.0	44.0	40.0	54.4	51.2	48.0	59.5	57.0	54.4	64.6	62.7	60.8	67.2	65.6	64.0
85	51.0	46.8	42.5	57.8	54.4	51.0	63.2	60.5	57.8	68.7	66.6	64.6	71.4	69.7	68.0
90	54.0	49.5	45.0	61.2	57.6	54.0	67.0	64.1	61.2	72.7	70.6	68.4	75.6	73.8	72.0
100	60.0	55.0	50.0	68.0	64.0	60.0	74.4	71.2	68.0	80.8	78.4	76.0	84.0	82.0	80.0
125	75.0	68.8	62.5	85.0	80.0	75.0	93.0	89.0	85.0	101.0	98.0	95.0	105.0	102.5	100.0
150	90.0	82.5	75.0	102.0	96.0	90.0	111.6	106.8	102.0	121.2	117.6	114.0	126.0	123.0	120.0
175	105.0	96.3	87.5	119.0	112.0	105.0	130.2	124.6	119.0	141.4	137.2	133.0	147.0	143.5	140.0
200	120.0	110.0	100.0	136.0	128.0	120.0	148.8	142.4	136.0	161.6	156.8	152.0	168.0	164.0	160.0
250	150.0	137.5	125.0	170.0	160.0	150.0	186.0	178.0	170.0	202.0	196.0	190.0	210.0	205.0	200.0
300	180.0	165.0	150.0	204.0	192.0	180.0	223.2	213.6	204.0	242.4	235.2	228.0	252.0	246.0	240.0

Metric springs conform to the Japanese Industrial Standards (JIS)

For years, we have manufactured high quality springs in all standard ISO sizes and a series of round wire springs, following ISO 9001:2015 quality standards – all in inch sizes. With the springs in this catalog, we are making available a line of true-metric springs, in all the standard JIS sizes and colors.

This extension of the spring line gives more options to customers with exacting requirements, and best of all, makes them available from the same reliable source as the inch springs. If you need help finding a specific heavy-duty compression spring, give us a call.



EXTRA LIGHT LOAD
Yellow



LIGHT LOAD
Blue



MEDIUM LOAD
Red



HEAVY LOAD
Green




**EXTRA HEAVY
LOAD**
Brown

DieMax XL® Extra-Light Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
10	5	2.1 x 0.8	20	91-1020	1.00	10.0		9.0		8.0	
			25	91-1025	0.80	12.5		11.2		10.0	
			30	91-1030	0.67	15.0		13.5		12.0	
			35	91-1035	0.57	17.5		15.7		14.0	
			40	91-1040	0.50	20.0		18.0		16.0	
			45	91-1045	0.44	22.5		20.2		18.0	
			50	91-1050	0.40	25.0		22.5		20.0	
			55	91-1055	0.36	27.5		24.7		22.0	
			60	91-1060	0.33	30.0		27.0		24.0	
			65	91-1065	0.31	32.5		29.2		26.0	
			70	91-1070	0.29	35.0		31.5		28.0	
			75	91-1075	0.27	37.5		33.7		30.0	
			80	91-1080	0.25	40.0		36.0		32.0	
			20	91-1220	1.40	10.0		9.0		8.0	
			25	91-1225	1.12	12.5		11.2		10.0	
			30	91-1230	0.93	15.0		13.5		12.0	
			35	91-1235	0.80	17.5		15.7		14.0	
			40	91-1240	0.70	20.0		18.0		16.0	
			45	91-1245	0.62	22.5		20.2		18.0	
			50	91-1250	0.56	25.0		22.5		20.0	
			55	91-1255	0.51	27.5		24.7		22.0	
			60	91-1260	0.47	30.0		27.0		24.0	
			65	91-1265	0.43	32.5		29.2		26.0	
			70	91-1270	0.40	35.0		31.5		28.0	
			75	91-1275	0.37	37.5		33.7		30.0	
			80	91-1280	0.35	40.0		36.0		32.0	
			25	91-1425	1.44	12.5		11.2		10.0	
			30	91-1430	1.20	15.0		13.5		12.0	
			35	91-1435	1.03	17.5		15.7		14.0	
			40	91-1440	0.90	20.0		18.0		16.0	
			45	91-1445	0.80	22.5		20.2		18.0	
			50	91-1450	0.72	25.0		22.5		20.0	
			55	91-1455	0.65	27.5		24.7		22.0	
			60	91-1460	0.60	30.0		27.0		24.0	
			65	91-1465	0.55	32.5		29.2		26.0	
			70	91-1470	0.51	35.0		31.5		28.0	
			75	91-1475	0.48	37.5		33.7		30.0	
			80	91-1480	0.45	40.0		36.0		32.0	
			90	91-1490	0.40	45.0		40.5		36.0	
			25	91-1625	1.68	12.5		11.2		10.0	
			30	91-1630	1.40	15.0		13.5		12.0	
			35	91-1635	1.20	17.5		15.7		14.0	
			40	91-1640	1.05	20.0		18.0		16.0	
			45	91-1645	0.94	22.5		20.0		18.0	
			50	91-1650	0.84	25.0		22.5		20.0	
			55	91-1655	0.77	27.5		24.7		22.0	
			60	91-1660	0.70	30.0		27.0		24.0	
			65	91-1665	0.65	32.5		29.2		26.0	
			70	91-1670	0.60	35.0		31.5		28.0	
			75	91-1675	0.56	37.5		33.7		30.0	
			80	91-1680	0.53	40.0		36.0		32.0	
			90	91-1690	0.47	45.0		40.5		36.0	
			100	91-16100	0.42	50.0		45.0		40.0	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
18	9	3.9 x 1.5	25	91-1825	2.08	12.5		11.2		10.0	
			30	91-1830	1.74	15.0		13.5		12.0	
			35	91-1835	1.49	17.5		15.7		14.0	
			40	91-1840	1.30	20.0		18.0		16.0	
			45	91-1845	1.16	22.5		20.2		18.0	
			50	91-1850	1.04	25.0		22.5		20.0	
			55	91-1855	0.95	27.5		24.7		22.0	
			60	91-1860	0.87	30.0		27.0		24.0	
			65	91-1865	0.80	32.5		29.2		26.0	
			70	91-1870	0.74	35.0		31.5		28.0	
			75	91-1875	0.70	37.5		33.7		30.0	
			80	91-1880	0.65	40.0		36.0		32.0	
			90	91-1890	0.58	45.0		40.5		36.0	
			100	91-18100	0.52	50.0		45.0		40.0	
			25	91-2025	2.56	12.5		11.2		10.0	
			30	91-2030	2.13	15.0		13.5		12.0	
			35	91-2035	1.83	17.5		15.7		14.0	
			40	91-2040	1.60	20.0		18.0		16.0	
			45	91-2045	1.42	22.5		20.2		18.0	
			50	91-2050	1.28	25.0		22.5		20.0	
			55	91-2055	1.16	27.5		24.7		22.0	
			60	91-2060	1.07	30.0		27.0		24.0	
			65	91-2065	0.98	32.5		29.2		26.0	
			70	91-2070	0.91	35.0		31.5		28.0	
			75	91-2075	0.85	37.5		33.7		30.0	
			80	91-2080	0.80	40.0		36.0		32.0	
			90	91-2090	0.71	45.0		40.5		36.0	
			100	91-20100	0.64	50.0		45.0		40.0	
			125	91-20125	0.51	62.5		56.2		50.0	
			150	91-20150	0.43	75.0		67.5		60.0	
			25	91-2225	3.20	12.5		11.2		10.0	
			30	91-2230	2.67	15.0		13.5		12.0	
			35	91-2235	2.29	17.5		15.7		14.0	
			40	91-2240	2.00	20.0		18.0		16.0	
			45	91-2245	1.78	22.5		20.2		18.0	
			50	91-2250	1.60	25.0		22.5		20.0	
			55	91-2255	1.46	27.5		24.7		22.0	
			60	91-2260	1.33	30.0		27.0		24.0	
			65	91-2265	1.23	32.5		29.2		26.0	
			70	91-2270	1.14	35.0		31.5		28.0	
			75	91-2275	1.07	37.5		33.7		30.0	
			80	91-2280	1.00	40.0		36.0		32.0	
			90	91-2290	0.89	45.0		40.5		36.0	
			100	91-22100	0.8	50.0		45.0		40.0	
			125	91-22125	0.64	62.5		56.2		50.0	
			150	91-22150	0.53	75.0		67.5		60.0	

* 1 daN = 1.0197 Kg (Force)





DieMax XL® Extra-Light Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
25	13.5	5.6 x 2.2	25	91-2525	4.00	12.5		11.2		10.0	
			30	91-2530	3.33	15.0		13.5		12.0	
			35	91-2535	2.85	17.5		15.7		14.0	
			40	91-2540	2.50	20.0		18.0		16.0	
			45	91-2545	2.22	22.5		20.2		18.0	
			50	91-2550	2.00	25.0		22.5		20.0	
			55	91-2555	1.82	27.5		24.7		22.0	
			60	91-2560	1.67	30.0		27.0		24.0	
			65	91-2565	1.54	32.5		29.2		26.0	
			70	91-2570	1.43	35.0		31.5		28.0	
			75	91-2575	1.33	37.5		33.7		30.0	
			80	91-2580	1.25	40.0		36.0		32.0	
			90	91-2590	1.11	45.0		40.5		36.0	
			100	91-25100	1.00	50.0		45.0		40.0	
			125	91-25125	0.80	62.5		56.2		50.0	
			150	91-25150	0.67	75.0		67.5		60.0	
			175	91-25175	0.57	87.5		78.7		70.0	
27	13.5	6.4 x 2.2	25	91-2725	4.80	12.5		11.2		10.0	
			30	91-2730	4.00	15.0		13.5		12.0	
			35	91-2735	3.43	17.5		15.7		14.0	
			40	91-2740	3.00	20.0		18.0		16.0	
			45	91-2745	2.67	22.5		20.2		18.0	
			50	91-2750	2.40	25.0		22.5		20.0	
			55	91-2755	2.18	27.5		24.7		22.0	
			60	91-2760	2.00	30.0		27.0		24.0	
			65	91-2765	1.85	32.5		29.2		26.0	
			70	91-2770	1.71	35.0		31.5		28.0	
			75	91-2775	1.60	37.5		33.7		30.0	
			80	91-2780	1.50	40.0		36.0		32.0	
			90	91-2790	1.33	45.0		40.5		36.0	
			100	91-27100	1.20	50.0		45.0		40.0	
			125	91-27125	0.96	62.5		56.2		50.0	
			150	91-27150	0.80	75.0		67.5		60.0	
			175	91-27175	0.69	87.5		78.7		70.0	
30	16	6.0 x 2.7	25	91-3025	5.80	12.5		11.2		10.0	
			30	91-3030	4.80	15.0		13.5		12.0	
			35	91-3035	4.13	17.5		15.7		14.0	
			40	91-3040	3.60	20.0		18.0		16.0	
			45	91-3045	3.21	22.5		20.2		18.0	
			50	91-3050	2.88	25.0		22.5		20.0	
			55	91-3055	2.63	27.5		24.7		22.0	
			60	91-3060	2.40	30.0		27.0		24.0	
			65	91-3065	2.22	32.5		29.2		26.0	
			70	91-3070	2.05	35.0		31.5		28.0	
			75	91-3075	1.93	37.5		33.7		30.0	
			80	91-3080	1.80	40.0		36.0		32.0	
			90	91-3090	1.60	45.0		40.5		36.0	
			100	91-30100	1.44	50.0		45.0		40.0	
			125	91-30125	1.15	62.5		56.2		50.0	
			150	91-30150	0.96	75.0		67.5		60.0	
			175	91-30175	0.82	87.5		78.7		70.0	
			200	91-30200	0.72	100.0		90.0		80.0	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
35	19	7.4 x 2.8	40	91-3540	4.90	20.0		18.0		16.0	
			45	91-3545	4.36	22.5		20.2		18.0	
			50	91-3550	3.92	25.0		22.5		20.0	
			55	91-3555	3.56	27.5		24.7		22.0	
			60	91-3560	3.26	30.0		27.0		24.0	
			65	91-3565	3.02	32.5		29.2		26.0	
			70	91-3570	2.80	35.0		31.5		28.0	
			75	91-3575	2.61	37.5		33.7		30.0	
			80	91-3580	2.45	40.0		36.0		32.0	
			90	91-3590	2.17	45.0		40.5		36.0	
			100	91-35100	1.96	50.0		45.0		40.0	
			125	91-35125	1.57	62.5		56.2		50.0	
			150	91-35150	1.30	75.0		67.5		60.0	
			175	91-35175	1.12	87.5		78.7		70.0	
			200	91-35200	0.98	100.0		90.0		80.0	
40	22	8.5 x 3.2	40	91-4040	6.38	20.0		18.0		16.0	
			50	91-4050	5.12	25.0		22.5		18.0	
			60	91-4060	4.26	30.0		27.0		20.0	
			70	91-4070	3.65	35.0		31.5		22.0	
			80	91-4080	3.20	40.0		36.0		24.0	
			90	91-4090	2.84	45.0		40.5		26.0	
			100	91-40100	2.56	50.0		45.0		28.0	
			125	91-40125	2.04	62.5		56.2		30.0	
			150	91-40150	1.70	75.0		67.5		32.0	
			175	91-40175	1.46	87.5		78.7		36.0	
			200	91-40200	1.28	100.0		90.0		40.0	
			250	91-40250	1.02	125.0		112.5		50.0	
50	27.5	10.6 x 4.0	50	91-5050	8.00	25.0		22.5		20.0	
			60	91-5060	6.66	30.0		27.0		24.0	
			70	91-5070	5.71	35.0		31.5		28.0	
			80	91-5080	5.00	40.0		36.0		32.0	
			90	91-5090	4.44	45.0		40.5		36.0	
			100	91-50100	4.00	50.0		45.0		40.0	
			125	91-50125	3.20	62.5		56.2		50.0	
			150	91-50150	2.66	75.0		67.5		60.0	
			175	91-50175	2.28	87.5		78.7		70.0	
			200	91-50200	2.00	100.0		90.0		80.0	
			250	91-50250	1.60	125.0		112.5		100.0	
			300	91-50300	1.33	150.0		135.0		120.0	
60	33	13.0 x 4.8	60	91-6060	9.59	30.0		27.0		24.0	
			70	91-6070	8.22	35.0		31.5		28.0	
			80	91-6080	7.19	40.0		36.0		32.0	
			90	91-6090	6.40	45.0		40.5		36.0	
			100	91-60100	5.76	50.0		45.0		40.0	
			125	91-60125	4.60	62.5		56.2		50.0	
			150	91-60150	3.84	75.0		67.5		60.0	
			175	91-60175	3.29	87.5		78.7		70.0	
			200	91-60200	2.88	100.0		90.0		80.0	
			250	91-60250	2.30	125.0		112.5		100.0	
			300	91-60300	1.92	150.0		135.0		120.0	

* 1 daN = 1.0197 Kg (Force)

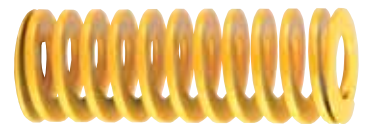


DieMax XL® Light Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
25	12.5	5.7 x 2.5	25	92-2525	8.40	10.0		9.0		8.0	
			30	92-2530	7.00	12.0		10.8		9.6	
			35	92-2535	6.00	14.0		12.6		11.2	
			40	92-2540	5.25	16.0		14.4		12.8	
			45	92-2545	4.67	18.0		16.2		14.4	
			50	92-2550	4.20	20.0		18.0		16.0	
			55	92-2555	3.82	22.0		19.8		17.6	
			60	92-2560	3.50	24.0		21.6		19.2	
			65	92-2565	3.23	26.0		23.4		20.8	
			70	92-2570	3.00	28.0		25.2		22.4	
			75	92-2575	2.80	30.0		27.0		24.0	
			80	92-2580	2.63	32.0		28.8		25.6	
			90	92-2590	2.33	36.0		32.4		28.8	
			100	92-25100	2.10	40.0		36.0		32.0	
			125	92-25125	1.68	50.0		45.0		40.0	
			150	92-25150	1.40	60.0		54.0		48.0	
			175	92-25175	1.20	70.0		63.0		56.0	
27	13.5	6.3 x 2.7	25	92-2725	10.00	10.0		9.0		8.0	
			30	92-2730	8.33	12.0		10.8		9.6	
			35	92-2735	7.14	14.0		12.6		11.2	
			40	92-2740	6.25	16.0		14.4		12.8	
			45	92-2745	5.56	18.0		16.2		14.4	
			50	92-2750	5.00	20.0		18.0		16.0	
			55	92-2755	4.55	22.0		19.8		17.6	
			60	92-2760	4.17	24.0		21.6		19.2	
			65	92-2765	3.85	26.0		23.4		20.8	
			70	92-2770	3.57	28.0		25.2		22.4	
			75	92-2775	3.33	30.0		27.0		24.0	
			80	92-2780	3.13	32.0		28.8		25.6	
			90	92-2790	2.78	36.0		32.4		28.8	
			100	92-27100	2.50	40.0		36.0		32.0	
			125	92-27125	2.00	50.0		45.0		40.0	
			150	92-27150	1.67	60.0		54.0		48.0	
			175	92-27175	1.43	70.0		63.0		56.0	
30	15	6.8 x 3.0	25	92-3025	12.11	10.0		9.0		8.0	
			30	92-3030	10.08	12.0		10.8		9.6	
			35	92-3035	8.65	14.0		12.6		11.2	
			40	92-3040	7.56	16.0		14.4		12.8	
			45	92-3045	6.73	18.0		16.2		14.4	
			50	92-3050	6.05	20.0		18.0		16.0	
			55	92-3055	5.50	22.0		19.8		17.6	
			60	92-3060	5.04	24.0		21.6		19.2	
			65	92-3065	4.65	26.0		23.4		20.8	
			70	92-3070	4.32	28.0		25.2		22.4	
			75	92-3075	4.03	30.0		27.0		24.0	
			80	92-3080	3.78	32.0		28.8		25.6	
			90	92-3090	3.36	36.0		32.4		28.8	
			100	92-30100	3.02	40.0		36.0		32.0	
			125	92-30125	2.42	50.0		45.0		40.0	
			150	92-30150	2.01	60.0		54.0		48.0	
			175	92-30175	1.72	70.0		63.0		56.0	
			200	92-30200	1.51	80.0		72.0		64.0	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
35	17.5	8.2 x 3.2	40	92-3540	10.31	16.0		14.4		12.8	
			45	92-3545	9.17	18.0		16.2		14.4	
			50	92-3550	8.25	20.0		18.0		16.0	
			55	92-3555	7.50	22.0		19.8		17.6	
			60	92-3560	6.87	24.0		21.6		19.2	
			65	92-3565	6.35	26.0		23.4		20.8	
			70	92-3570	5.89	28.0		25.2		22.4	
			75	92-3575	5.50	30.0		27.0		24.0	
			80	92-3580	5.15	32.0		28.8		25.6	
			90	92-3590	4.58	36.0		32.4		28.8	
			100	92-35100	4.12	40.0		36.0		32.0	
			125	92-35125	3.30	50.0		45.0		40.0	
			150	92-35150	2.75	60.0		54.0		48.0	
			175	92-35175	2.35	70.0		63.0		56.0	
			200	92-35200	2.06	80.0		72.0		64.0	
40	20	9.5 x 3.8	40	92-4040	13.50	16.0		14.4		12.8	
			50	92-4050	10.80	20.0		18.0		16.0	
			60	92-4060	9.00	24.0		21.6		19.2	
			70	92-4070	7.71	28.0		25.2		22.4	
			80	92-4080	6.75	32.0		28.8		25.6	
			90	92-4090	6.00	36.0		32.4		28.8	
			100	92-40100	5.40	40.0		36.0		32.0	
			125	92-40125	4.32	50.0		45.0		40.0	
			150	92-40150	3.60	60.0		54.0		48.0	
			175	92-40175	3.08	70.0		63.0		56.0	
			200	92-40200	2.70	80.0		72.0		64.0	
			250	92-40250	2.16	100.0		90.0		80.0	
50	25	12.1 x 4.8	50	92-5050	16.89	20.0		18.0		16.0	
			60	92-5060	14.08	24.0		21.6		19.2	
			70	92-5070	12.07	28.0		25.2		22.4	
			80	92-5080	10.56	32.0		28.8		25.6	
			90	92-5090	9.38	36.0		32.4		28.8	
			100	92-50100	8.45	40.0		36.0		32.0	
			125	92-50125	6.76	50.0		45.0		40.0	
			150	92-50150	5.63	60.0		54.0		48.0	
			175	92-50175	4.82	70.0		63.0		56.0	
			200	92-50200	4.22	80.0		72.0		64.0	
			250	92-50250	3.38	100.0		90.0		80.0	
			300	92-50300	2.81	120.0		108.0		96.0	
60	30	14.4 x 5.7	60	92-6060	20.25	24.0		21.6		19.2	
			70	92-6070	17.35	28.0		25.2		22.4	
			80	92-6080	15.18	32.0		28.8		25.6	
			90	92-6090	13.50	36.0		32.4		28.8	
			100	92-60100	12.15	40.0		36.0		32.0	
			125	92-60125	9.72	50.0		45.0		40.0	
			150	92-60150	8.10	60.0		54.0		48.0	
			175	92-60175	6.94	70.0		63.0		56.0	
			200	92-60200	6.07	80.0		72.0		64.0	
			250	92-60250	4.86	100.0		90.0		80.0	
			300	92-60300	4.05	120.0		108.0		96.0	

* 1 daN = 1.0197 Kg (Force)



DieMax XL® Medium Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm)	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
10	5	2.0 x 1.4	20	93-1020	3.13	6.4		5.8		5.1	
			25	93-1025	2.50	8.0		7.2		6.4	
			30	93-1030	2.08	9.6		8.6		7.7	
			35	93-1035	1.78	11.2		10.1		9.0	
			40	93-1040	1.56	12.8		11.5		10.2	
			45	93-1045	1.38	14.4		13.0		11.5	
			50	93-1050	1.25	16.0		14.4	18	12.8	16
			55	93-1055	1.13	17.6		15.8	(176.5)	14.1	(156.9)
			60	93-1060	1.04	19.2		17.3		15.4	
			65	93-1065	0.96	20.8		18.7		16.6	
			70	93-1070	0.89	22.4		20.2		17.9	
			75	93-1075	0.83	24.0		21.6		19.2	
12	6	2.5 x 1.5	20	93-1220	4.53	6.4		5.8		5.1	
			25	93-1225	3.62	8.0		7.2		6.4	
			30	93-1230	3.02	9.6		8.6		7.7	
			35	93-1235	2.58	11.2		10.1		9.0	
			40	93-1240	2.27	12.8		11.5		10.2	
			45	93-1245	2.01	14.4		13.0		11.5	
			50	93-1250	1.81	16.0		14.4	26	12.8	23
			55	93-1255	1.64	17.6		15.8	(255.0)	14.1	(225.6)
			60	93-1260	1.51	19.2		17.3		15.4	
			65	93-1265	1.39	20.8		18.7		16.6	
			70	93-1270	1.29	22.4		20.2		17.9	
			75	93-1275	1.20	24.0		21.6		19.2	
14	7	3.0 x 1.8	25	93-1425	4.87	8.0		7.2		6.4	
			30	93-1430	4.06	9.6		8.6		7.7	
			35	93-1435	3.48	11.2		10.1		9.0	
			40	93-1440	3.04	12.8		11.5		10.2	
			45	93-1445	2.70	14.4		13.0		11.5	
			50	93-1450	2.43	16.0		14.4		12.8	
			55	93-1455	2.21	17.6		15.8	35	14.1	31
			60	93-1460	2.03	19.2		17.3	(343.2)	15.4	(304.0)
			65	93-1465	1.87	20.8		18.7		16.6	
			70	93-1470	1.74	22.4		20.2		17.9	
			75	93-1475	1.62	24.0		21.6		19.2	
			80	93-1480	1.52	25.6		23.0		20.5	
16	8	3.5 x 2.1	25	93-1625	6.39	8.0		7.2		6.4	
			30	93-1630	5.32	9.6		8.6		7.7	
			35	93-1635	4.55	11.2		10.1		9.0	
			40	93-1640	3.98	12.8		11.5		10.2	
			45	93-1645	3.54	14.4		13.0		11.5	
			50	93-1650	3.18	16.0		14.4		12.8	
			55	93-1655	2.89	17.6		15.8	51	14.1	41
			60	93-1660	2.65	19.2		17.3	(451.1)	15.4	(402.1)
			65	93-1665	2.45	20.8		18.7		16.6	
			70	93-1670	2.27	22.4		20.2		17.9	
			75	93-1675	2.11	24.0		21.6		19.2	
			80	93-1680	1.99	25.6		23.0		20.5	
16	8	3.5 x 2.1	90	93-1690	1.77	28.8		25.9		23.0	
			100	93-16100	1.59	32.0		28.8		25.6	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm)	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
18	9	4.0 x 2.2	25	93-1825	8.12	8.0		7.2		6.4	
			30	93-1830	6.77	9.6		8.6		7.7	
			35	93-1835	5.80	11.2		10.1		9.0	
			40	93-1840	5.07	12.8		11.5		10.2	
			45	93-1845	4.51	14.4		13.0		11.5	
			50	93-1850	4.06	16.0		14.4		12.8	
			55	93-1855	3.69	17.6		15.8	65	14.1	52
			60	93-1860	3.38	19.2		17.3	(637.4)	15.4	(510.0)
			65	93-1865	3.12	20.8		18.7		16.6	
			70	93-1870	2.90	22.4		20.2		17.9	
			75	93-1875	2.70	24.0		21.6		19.2	
			80	93-1880	2.53	25.6		23.0		20.5	
20	10	4.5 x 2.5	90	93-1890	2.25	28.8		25.9		23.0	
			100	93-18100	2.02	32.0		28.8		25.6	
			25	93-2025	10.00	8.0		7.2		6.4	
			30	93-2030	8.33	9.6		8.6		7.7	
			35	93-2035	7.14	11.2		10.1		9.0	
			40	93-2040	6.25	12.8		11.5		10.2	
			45	93-2045	5.55	14.4		13.0		11.5	
			50	93-2050	5.00	16.0		14.4		12.8	
			55	93-2055	4.54	17.6		15.8		14.1	
			60	93-2060	4.16	19.2		17.3	80	15.4	64
			65	93-2065	3.84	20.8		18.7	(784.5)	16.6	(627.6)
			70	93-2070	3.57	22.4		20.2		17.9	
22	11	5.0 x 2.8	75	93-2075	3.33	24.0		21.6		19.2	
			80	93-2080	3.12	25.6		23.0		20.5	
			90	93-2090	2.77	28.8		25.9		23.0	
			100	93-20100	2.50	32.0		28.8		25.6	
			125	93-20125	2.00	40.0		36.0		32.0	
			150	93-20150	1.67	48.0		43.2		38.4	
			25	93-2225	12.13	8.0		7.2		6.4	
			30	93-2230	10.10	9.6		8.6		7.7	
			35	93-2235	8.65	11.2		10.1		9.0	
			40	93-2240	7.57	12.8		11.5		10.2	
			45	93-2245	6.74	14.4		13.0		11.5	
			50	93-2250	6.06	16.0		14.4		12.8	
22	11	5.0 x 2.8	55	93-2255	5.50	17.6		15.8		14.1	
			60	93-2260	5.05	19.2		17.3	97	15.4	77
			65	93-2265	4.66	20.8		18.7	(951.3)	16.6	(755.1)
			70	93-2270	4.33	22.4		20.2		17.9	
			75	93-2275	4.04	24.0		21.6		19.2	
			80	93-2280	3.78	25.6		23.0		20.5	
			90	93-2290	3.36	28.8		25.9		23.0	
			100	93-22100	3.03	32.0		28.8		25.6	
			125	93-22125	2.42	40.0		36.0		32.0	
			150	93-22150	2.01	48.0		43.2		38.4	

* 1 daN = 1.0197 Kg (Force)



DieMax XL® Medium Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm)	Free Length (mm) C	Catalog Number	Spring Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
25	12.5	5.7 x 3.1	25	93-2525	15.63	8.0		7.2		6.4	
			30	93-2530	13.02	9.6		8.6		7.7	
			35	93-2535	11.20	11.2		10.1		9.0	
			40	93-2540	9.76	12.8		11.5		10.2	
			45	93-2545	8.68	14.4		13.0		11.5	
			50	93-2550	7.81	16.0		14.4		12.8	
			55	93-2555	7.10	17.6		15.8		14.1	
			60	93-2560	6.51	19.2		17.3		15.4	
			65	93-2565	6.00	20.8		18.7		16.6	
			70	93-2570	5.58	22.4		20.2		17.9	
			75	93-2575	5.21	24.0		21.6		19.2	
			80	93-2580	4.88	25.6		23.0		20.5	
			90	93-2590	4.34	28.8		25.9		23.0	
			100	93-25100	3.90	32.0		28.8		25.6	
			125	93-25125	3.12	40.0		36.0		32.0	
			150	93-25150	2.60	48.0		43.2		38.4	
			175	93-25175	2.23	56.0		50.4		44.8	
27	13.5	6.1 x 3.4	25	93-2725	18.25	8.0		7.2		6.4	
			30	93-2730	15.20	9.6		8.6		7.7	
			35	93-2735	13.04	11.2		10.1		9.0	
			40	93-2740	11.40	12.8		11.5		10.2	
			45	93-2745	10.14	14.4		13.0		11.5	
			50	93-2750	9.12	16.0		14.4		12.8	
			55	93-2755	8.30	17.6		15.8		14.1	
			60	93-2760	7.60	19.2		17.3		15.4	
			65	93-2765	7.00	20.8		18.7		16.6	
			70	93-2770	6.51	22.4		20.2		17.9	
			75	93-2775	6.08	24.0		21.6		19.2	
			80	93-2780	5.70	25.6		23.0		20.5	
			90	93-2790	5.06	28.8		25.9		23.0	
			100	93-27100	4.56	32.0		28.8		25.6	
			125	93-27125	3.65	40.0		36.0		32.0	
			150	93-27150	3.04	48.0		43.2		38.4	
			175	93-27175	2.61	56.0		50.4		44.8	
30	15	6.5 x 4.0	25	93-3025	22.50	8.0		7.2		6.4	
			30	93-3030	18.75	9.6		8.6		7.7	
			35	93-3035	16.10	11.2		10.1		9.0	
			40	93-3040	14.06	12.8		11.5		10.2	
			45	93-3045	12.50	14.4		13.0		11.5	
			50	93-3050	11.25	16.0		14.4		12.8	
			55	93-3055	10.23	17.6		15.8		14.1	
			60	93-3060	9.37	19.2		17.3		15.4	
			65	93-3065	8.65	20.8		18.7		16.6	
			70	93-3070	8.03	22.4		20.2		17.9	
			75	93-3075	7.50	24.0		21.6		19.2	
			80	93-3080	7.03	25.6		23.0		20.5	
			90	93-3090	6.25	28.8		25.9		23.0	
			100	93-30100	5.62	32.0		28.8		25.6	
			125	93-30125	4.50	40.0		36.0		32.0	
			150	93-30150	3.75	48.0		43.2		38.4	
			175	93-30175	3.21	56.0		50.4		44.8	
			200	93-30200	2.81	64.0		57.6		51.2	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm)	Free Length (mm) C	Catalog Number	Spring Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
35	17.5	7.7 x 4.3	40	93-3540	19.14	12.8		11.5		10.2	
			45	93-3545	17.01	14.4		13.0		11.5	
			50	93-3550	15.31	16.0		14.4		12.8	
			55	93-3555	13.92	17.6		15.8		14.1	
			60	93-3560	12.76	19.2		17.3		15.4	
			65	93-3565	11.77	20.8		18.7		16.6	
			70	93-3570	10.93	22.4		20.2		17.9	
			75	93-3575	10.20	24.0		21.6		19.2	
			80	93-3580	9.57	25.6		23.0		20.5	
			90	93-3590	8.50	28.8		25.9		23.0	
			100	93-35100	7.65	32.0		28.8		25.6	
			125	93-35125	6.12	40.0		36.0		32.0	
			150	93-35150	5.10	48.0		43.2		38.4	
			175	93-35175	4.37	56.0		50.4		44.8	
			200	93-35200	3.82	64.0		57.6		51.2	
40	20	9.4 x 4.8	40	93-4040	25.02	12.8		11.5		10.2	
			50	93-4050	20.00	16.0		14.4		12.8	
			60	93-4060	16.60	19.2		17.3		15.4	
			70	93-4070	14.28	22.4		20.2		17.9	
			80	93-4080	12.50	25.6		23.0		20.5	
			90	93-4090	11.11	28.8		25.9		23.0	
			100	93-40100	10.00	32.0		28.8		25.6	
			125	93-40125	8.00	40.0		36.0		32.0	
			150	93-40150	6.66	48.0		43.2		38.4	
			175	93-40175	5.71	56.0		50.4		44.8	
			200	93-40200	5.00	64.0		57.6		51.2	
			250	93-40250	4.00	80.0		72.0		64.0	
50	25	11.5 x 6.1	50	93-5050	31.25	16.0		14.4		12.8	
			60	93-5060	26.04	19.2		17.3		15.4	
			70	93-5070	22.32	22.4		20.2		17.9	
			80	93-5080	19.53	25.6		23.0		20.5	
			90	93-5090	17.36	28.8		25.9		23.0	
			100	93-50100	15.62	32.0		28.8		25.6	
			125	93-50125	12.50	40.0		36.0		32.0	
			150	93-50150	10.41	48.0		43.2		38.4	
			175	93-50175	8.92	56.0		50.4		44.8	
			200	93-50200	7.81	64.0		57.6		51.2	
			250	93-50250	6.25	80.0		72.0		64.0	
			300	93-50300	5.20	96.0		86.4		76.8	
60	30	13.6 x 7.6	60	93-6060	37.40	19.2		17.3		15.4	
			70	93-6070	32.10	22.4		20.2		17.9	
			80	93-6080	28.12	25.6		23.0		20.5	
			90	93-6090	25.00	28.8		25.9		23.0	
			100	93-60100	22.50	32.0		28.8		25.6	
			125	93-60125	18.00	40.0		36.0		32.0	
			150	93-60150	15.00	48.0		43.2		38.4	
			175	93-60175	12.85	56.0		50.4		44.8	
			200	93-60200	11.25	64.0		57.6		51.2	
			250	93-60250	9.00	80.0		72.0		64.0	
			300	93-60300	7.50	96.0		86.4		76.8	

* 1 daN = 1.0197 Kg (Force)



DieMax XL® Heavy Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm)	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
10	5	2.0 x 1.7	20	94-1020	6.25	4.8		4.3		3.8	
			25	94-1025	5.00	6.0		5.4		4.8	
			30	94-1030	4.16	7.2		6.5		5.8	
			35	94-1035	3.57	8.4		7.5		6.7	
			40	94-1040	3.15	9.6		8.6		7.7	
			45	94-1045	2.77	10.8		9.7		8.6	
			50	94-1050	2.50	12.0	30 (294.2)	10.8	27 (264.8)	9.6	24 (235.4)
			55	94-1055	2.27	13.2		11.8		10.6	
			60	94-1060	2.08	14.4		13.0		11.5	
			65	94-1065	1.92	15.6		14.0		12.5	
			70	94-1070	1.79	16.8		15.1		13.4	
			75	94-1075	1.67	18.0		16.2		14.4	
			80	94-1080	1.56	19.2		17.3		15.4	
12	6	2.5 x 2.0	20	94-1220	8.90	4.8		4.3		3.8	
			25	94-1225	7.10	6.0		5.4		4.8	
			30	94-1230	5.97	7.2		6.5		5.8	
			35	94-1235	5.11	8.4		7.5		6.7	
			40	94-1240	4.47	9.6		8.6		7.7	
			45	94-1245	3.98	10.8		9.7		8.6	
			50	94-1250	3.58	12.0	43 (421.7)	10.8	38 (372.7)	9.6	34 (333.4)
			55	94-1255	3.25	13.2		11.8		10.6	
			60	94-1260	2.98	14.4		13.0		11.5	
			65	94-1265	2.74	15.6		14.0		12.5	
			70	94-1270	2.54	16.8		15.1		13.4	
			75	94-1275	2.37	18.0		16.2		14.4	
			80	94-1280	2.21	19.2		17.3		15.4	
14	7	3.0 x 2.3	25	94-1425	9.83	6.0		5.4		4.8	
			30	94-1430	8.19	7.2		6.5		5.8	
			35	94-1435	7.02	8.4		7.5		6.7	
			40	94-1440	6.14	9.6		8.6		7.7	
			45	94-1445	5.46	10.8		9.7		8.6	
			50	94-1450	4.91	12.0		10.8		9.6	
			55	94-1455	4.46	13.2	59 (578.6)	11.8	53 (519.8)	10.6	47 (460.9)
			60	94-1460	4.09	14.4		13.0		11.5	
			65	94-1465	3.78	15.6		14.0		12.5	
			70	94-1470	3.51	16.8		15.1		13.4	
			75	94-1475	3.27	18.0		16.2		14.4	
			80	94-1480	3.07	19.2		17.3		15.4	
			90	94-1490	2.72	21.6		19.4		17.3	
16	8	3.5 x 2.5	25	94-1625	18.83	6.0		5.4		4.8	
			30	94-1630	10.69	7.2		6.5		5.8	
			35	94-1635	9.16	8.4		7.5		6.7	
			40	94-1640	8.02	9.6		8.6		7.7	
			45	94-1645	7.12	10.8		9.7		8.6	
			50	94-1650	6.41	12.0		10.8		9.6	
			55	94-1655	5.83	13.2	77 (755)	11.8	69 (676.7)	10.6	62 (608.0)
			60	94-1660	5.34	14.4		13.0		11.5	
			65	94-1665	4.93	15.6		14.0		12.5	
			70	94-1670	4.58	16.8		15.1		13.4	
			75	94-1675	4.28	18.0		16.2		14.4	
			80	94-1680	4.01	19.2		17.3		15.4	
			90	94-1690	3.57	21.6		19.4		17.3	
			100	94-16100	3.21	24.0		21.6		19.2	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm)	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
18	9	4.0 x 2.7	25	94-1825	16.16	6.0		5.4		4.8	
			30	94-1830	13.47	7.2		6.5		5.8	
			35	94-1835	11.54	8.4		7.5		6.7	
			40	94-1840	10.10	9.6		8.6		7.7	
			45	94-1845	8.98	10.8		9.7		8.6	
			50	94-1850	8.08	12.0		10.8		9.6	
			55	94-1855	7.34	13.2	97 (951.3)	11.8	87 (853.2)	10.6	78 (764.9)
			60	94-1860	6.73	14.4		13.0		11.5	
			65	94-1865	6.21	15.6		14.0		12.5	
			70	94-1870	5.77	16.8		15.1		13.4	
			75	94-1875	5.39	18.0		16.2		14.4	
			80	94-1880	5.05	19.2		17.3		15.4	
			90	94-1890	4.50	21.6		19.4		17.3	
			100	94-18100	4.04	24.0		21.6		19.2	
20	10	4.5 x 3.1	25	94-2025	20.00	6.0		5.4		4.8	
			30	94-2030	16.66	7.2		6.5		5.8	
			35	94-2035	14.28	8.4		7.5		6.7	
			40	94-2040	12.50	9.6		8.6		7.7	
			45	94-2045	11.11	10.8		9.7		8.6	
			50	94-2050	10.00	12.0		10.8		9.6	
			55	94-2055	9.09	13.2		11.8		10.6	
			60	94-2060	8.33	14.4	120 (1176.8)	13.0	108 (1059.1)	11.5	96 (941.4)
			65	94-2065	7.69	15.6		14.0		12.5	
			70	94-2070	7.14	16.8		15.1		13.4	
			75	94-2075	6.67	18.0		16.2		14.4	
			80	94-2080	6.25	19.2		17.3		15.4	
			90	94-2090	5.55	21.6		19.4		17.3	
22	11	5.1 x 3.4	100	94-20100	5.00	24.0		21.6		19.2	
			125	94-20125	4.00	30.0		27.0		24.0	
			150	94-20150	3.33	36.0		32.4		28.8	
			25	94-2225	24.16	6.0		5.4		4.8	
			30	94-2230	20.13	7.2		6.5		5.8	
			35	94-2235	17.30	8.4		7.5		6.7	
			40	94-2240	15.10	9.6		8.6		7.7	
			45	94-2245	13.40	10.8		9.7		8.6	
			50	94-2250	12.08	12.0		10.8		9.6	
			55	94-2255	10.94	13.2		11.8		10.6	
			60	94-2260	10.06	14.4	145 (1422.0)	13.0	130 (1274.9)	11.5	116 (1137.6)
			65	94-2265	9.28	15.6		14.0		12.5	
			70	94-2270	8.63	16.8		15.1		13.4	
			75	94-2275	8.04	18.0		16.2		14.4	
			80	94-2280	7.55	19.2		17.3		15.4	
			90	94-2290	6.71	21.6		19.4		17.3	
			100	94-22100	6.04	24.0		21.6		19.2	
			125	94-22125	4.83	30.0		27.0		24.0	
			150	94-22150	4.02	36.0		32.4		28.8	

* 1 daN = 1.0197 Kg (Force)




DieMax XL® Heavy Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
25	12.5	5.8 x 3.9	25	94-2525	31.20	6.0		5.4		4.8	
			30	94-2530	25.97	7.2		6.5		5.8	
			35	94-2535	22.38	8.4		7.5		6.7	
			40	94-2540	19.47	9.6		8.6		7.7	
			45	94-2545	17.40	10.8		9.7		8.6	
			50	94-2550	15.58	12.0		10.8		9.6	
			55	94-2555	14.20	13.2		11.9		10.6	
			60	94-2560	12.98	14.4		13.0		11.5	
			65	94-2565	12.00	15.6		14.0		12.5	
			70	94-2570	11.13	16.8		15.1		13.4	
			75	94-2575	10.40	18.0		16.2		14.4	
			80	94-2580	9.73	19.2		17.3		15.4	
			90	94-2590	8.65	21.6		19.4		17.3	
			100	94-25100	7.79	24.0		21.6		19.2	
			125	94-25125	6.23	30.0		27.0		24.0	
			150	94-25150	5.20	36.0		32.4		28.8	
			175	94-25175	4.46	42.0		37.8		33.6	
27	13.5	6.3 x 4.2	25	94-2725	36.40	6.0		5.4		4.8	
			30	94-2730	30.41	7.2		6.5		5.8	
			35	94-2735	26.20	8.4		7.5		6.7	
			40	94-2740	22.81	9.6		8.6		7.7	
			45	94-2745	20.30	10.8		9.7		8.6	
			50	94-2750	18.25	12.0		10.8		9.6	
			55	94-2755	16.50	13.2		11.9		10.6	
			60	94-2760	15.20	14.4		13.0		11.5	
			65	94-2765	14.00	15.6		14.0		12.5	
			70	94-2770	13.03	16.8		15.1		13.4	
			75	94-2775	12.10	18.0		16.2		14.4	
			80	94-2780	11.40	19.2		17.3		15.4	
			90	94-2790	10.13	21.6		19.4		17.3	
			100	94-27100	9.12	24.0		21.6		19.2	
			125	94-27125	7.30	30.0		27.0		24.0	
			150	94-27150	6.08	36.0		32.4		28.8	
			175	94-27175	5.21	42.0		37.8		33.6	
30	15	7.1 x 4.4	25	94-3025	45.00	6.0		5.4		4.8	
			30	94-3030	37.50	7.2		6.5		5.8	
			35	94-3035	32.26	8.4		7.5		6.7	
			40	94-3040	28.12	9.6		8.6		7.7	
			45	94-3045	25.00	10.8		9.7		8.6	
			50	94-3050	22.50	12.0		10.8		9.6	
			55	94-3055	20.40	13.2		11.9		10.6	
			60	94-3060	18.75	14.4		13.0		11.5	
			65	94-3065	17.30	15.6		14.0		12.5	
			70	94-3070	16.07	16.8		15.1		13.4	
			75	94-3075	15.00	18.0		16.2		14.4	
			80	94-3080	14.06	19.2		17.3		15.4	
			90	94-3090	12.50	21.6		19.4		17.3	
			100	94-30100	11.25	24.0		21.6		19.2	
			125	94-30125	9.00	30.0		27.0		24.0	
			150	94-30150	7.50	36.0		32.4		28.8	
			175	94-30175	6.42	42.0		37.8		33.6	
			200	94-30200	5.62	48.0		43.2		38.4	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring *Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
35	17.5	8.3 x 5.2	40	94-3540	38.22	9.6		8.6		7.7	
			45	94-3545	33.98	10.8		9.7		8.6	
			50	94-3550	30.58	12.0		10.8		9.6	
			55	94-3555	27.80	13.2		11.9		10.5	
			60	94-3560	25.48	14.4		13.0		11.5	
			65	94-3565	23.53	15.6		14.0		12.5	
			70	94-3570	21.84	16.8		15.1		13.4	
			75	94-3575	20.39	18.0		16.2		14.4	
			80	94-3580	19.11	19.2		17.3		15.4	
			90	94-3590	16.99	21.6		19.4		17.3	
			100	94-35100	15.29	24.0		21.6		19.2	
			125	94-35125	12.23	30.0		27.0		24.0	
			150	94-35150	10.19	36.0		32.4		28.8	
			175	94-35175	8.73	42.0		37.8		33.6	
			200	94-35200	7.64	48.0		43.2		38.4	
40	20	9.3 x 6.1	40	94-4040	50.00	9.6		8.6		7.7	
			50	94-4050	40.00	12.0		10.8		9.6	
			60	94-4060	33.33	14.4		13.0		11.5	
			70	94-4070	28.57	16.8		15.1		13.4	
			80	94-4080	25.00	19.2		17.3		15.4	
			90	94-4090	22.22	21.6		19.4		17.3	
			100	94-40100	20.00	24.0		21.6		19.2	
			125	94-40125	16.00	30.0		27.0		24.0	
			150	94-40150	13.33	36.0		32.4		28.8	
			175	94-40175	11.42	42.0		37.8		33.6	
			200	94-40200	10.00	48.0		43.2		38.4	
			250	94-40250	8.00	60.0		54.0		48.0	
50	25	11.8 x 7.8	50	94-5050	62.50	12.0		10.8		9.6	
			60	94-5060	52.08	14.4		13.0		11.5	
			70	94-5070	44.64	16.8		15.1		13.4	
			80	94-5080	39.06	19.2		17.3		15.4	
			90	94-5090	34.72	21.6		19.4		17.3	
			100	94-50100	32.25	24.0		21.6		19.2	
			125	94-50125	25.00	30.0		27.0		24.0	
			150	94-50150	20.83	36.0		32.4		28.8	
			175	94-50175	17.85	42.0		37.8		33.6	
			200	94-50200	15.62	48.0		43.2		38.4	
			250	94-50250	12.50	60.0		54.0		48.0	
			300	94-50300	10.41	72.0		64.8		57.6	
60	30	14.5 x 9.3	60	94-6060	75.00	14.4		13.0		11.5	
			70	94-6070	64.28	16.8		15.1		13.4	
			80	94-6080	56.25	19.2		17.3		15.4	
			90	94-6090	50.00	21.6		19.4		17.3	
			100	94-60100	45.00	24.0		21.6		19.2	
			125	94-60125	36.00	30.0		27.0		24.0	
			150	94-60150	30.00	36.0		32.4		28.8	
			175	94-60175	25.71	42.0		37.8		33.6	
			200	94-60200	22.50	48.0		43.2		38.4	
			250	94-60250	18.00	60.0		54.0		48.0	
			300	94-60300	15.00	72.0		64.8		57.6	

* 1 daN = 1.0197 Kg (Force)




DieMax XL® Extra-Heavy Load Springs – JIS

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
25	12.5	5.8 x 4.6	25	95-2525	49.00	5.0		4.5		4.0	
			30	95-2530	40.80	6.0		5.4		4.8	
			35	95-2535	35.00	7.0		6.3		5.6	
			40	95-2540	30.60	8.0		7.2		6.4	
			45	95-2545	27.20	9.0		8.1		7.2	
			50	95-2550	24.50	10.0		9.0		8.0	
			55	95-2555	22.30	11.0		9.9		8.8	
			60	95-2560	20.40	12.0		10.8		9.6	
			65	95-2565	18.80	13.0		11.7		10.4	
			70	95-2570	17.50	14.0		12.6		11.2	
			75	95-2575	16.30	15.0		13.5		12.0	
			80	95-2580	15.30	16.0		14.4		12.8	
			90	95-2590	13.60	18.0		16.2		14.4	
			100	95-25100	12.30	20.0		18.0		16.0	
			125	95-25125	9.80	25.0		22.5		20.0	
			150	95-25150	8.17	30.0		27.0		24.0	
			175	95-25175	7.00	35.0		31.5		28.0	
27	13.5	6.4 x 5.0	25	95-2725	58.00	5.0		4.5		4.0	
			30	95-2730	48.33	6.0		5.4		4.8	
			35	95-2735	41.43	7.0		6.3		5.6	
			40	95-2740	36.25	8.0		7.2		6.4	
			45	95-2745	32.22	9.0		8.1		7.2	
			50	95-2750	29.00	10.0		9.0		8.0	
			55	95-2755	26.36	11.0		9.9		8.8	
			60	95-2760	24.17	12.0		10.8		9.6	
			65	95-2765	22.31	13.0		11.7		10.4	
			70	95-2770	20.71	14.0		12.6		11.2	
			75	95-2775	19.33	15.0		13.5		12.0	
			80	95-2780	18.13	16.0		14.4		12.8	
			90	95-2790	16.11	18.0		16.2		14.4	
			100	95-27100	14.50	20.0		18.0		16.0	
			125	95-27125	11.60	25.0		22.5		20.0	
			150	95-27150	9.67	30.0		27.0		24.0	
			175	95-27175	8.28	35.0		31.5		28.0	
30	15	7.1 x 5.3	25	95-3025	72.00	5.0		4.5		4.0	
			30	95-3030	60.00	6.0		5.4		4.8	
			35	95-3035	51.43	7.0		6.3		5.6	
			40	95-3040	45.00	8.0		7.2		6.4	
			45	95-3045	40.00	9.0		8.1		7.2	
			50	95-3050	36.00	10.0		9.0		8.0	
			55	95-3055	32.72	11.0		9.9		8.8	
			60	95-3060	30.00	12.0		10.8		9.6	
			65	95-3065	27.69	13.0		11.7		10.4	
			70	95-3070	25.71	14.0		12.6		11.2	
			75	95-3075	24.00	15.0		13.5		12.0	
			80	95-3080	22.50	16.0		14.4		12.8	
			90	95-3090	20.00	18.0		16.2		14.4	
			100	95-30100	18.00	20.0		18.0		16.0	
			125	95-30125	14.40	25.0		22.5		20.0	
			150	95-30150	12.00	30.0		27.0		24.0	
			175	95-30175	10.28	35.0		31.5		28.0	
			200	95-30200	9.00	40.0		36.0		32.0	

Outer Dia. (mm) A	Inner Dia. (mm) B	Wire Size (mm) C	Free Length (mm) C	Catalog Number	Spring Rate kgf/mm	LOAD-DEFLECTION TABLE					
						0.3 million		0.5 million		1 million	
						Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)	Defl. mm	Load kgf (N)
35	17.5	8.3 x 6.6	40	95-3540	61.25	8.0		7.2		6.4	
			45	95-3545	54.44	9.0		8.1		7.2	
			50	95-3550	49.00	10.0		9.0		8.0	
			55	95-3555	44.54	11.0		9.9		8.8	
			60	95-3560	40.83	12.0		10.8		9.6	
			65	95-3565	37.69	13.0		11.7		10.4	
			70	95-3570	35.00	14.0		12.6		11.2	
			75	95-3575	32.67	15.0		13.5		12.0	
			80	95-3580	30.62	16.0		14.4		12.8	
			90	95-3590	27.22	18.0		16.2		14.4	
			100	95-35100	24.50	20.0		18.0		16.0	
			125	95-35125	19.60	25.0		22.5		20.0	
			150	95-35150	16.33	30.0		27.0		24.0	
			175	95-35175	14.00	35.0		31.5		28.0	
			200	95-35200	12.25	40.0		36.0		32.0	
40	20	9.8 x 7.5	40	95-4040	80.00	8.0		7.2		6.4	
			50	95-4050	64.00	10.0		9.0		8.0	
			60	95-4060	53.33	12.0		10.8		9.6	
			70	95-4070	45.71	14.0		12.6		11.2	
			80	95-4080	40.00	16.0		14.4		12.8	
			90	95-4090	35.55	18.0		16.2		14.4	
			100	95-40100	32.00	20.0		18.0		16.0	
			125	95-40125	25.60	25.0		22.5		20.0	
			150	95-40150	21.33	30.0		27.0		24.0	
			175	95-40175	18.28	35.0		31.5		28.0	
			200	95-40200	16.00	40.0		36.0		32.0	
			250	95-40250	12.80	50.0		45.0		40.0	
50	25	12.0 x 8.8	50	95-5050	100.00	10.0		9.0		8.0	
			60	95-5060	83.33	12.0		10.8		9.6	
			70	95-5070	71.42	14.0		12.6		11.2	
			80	95-5080	62.50	16.0		14.4		12.8	
			90	95-5090	55.55	18.0		16.2		14.4	
			100	95-50100	50.00	20.0		18.0		16.0	
			125	95-50125	40.00	25.0		22.5		20.0	
			150	95-50150	33.33	30.0		27.0		24.0	
			175	95-50175	28.57	35.0		31.5		28.0	
			200	95-50200	25.00	40.0		36.0		32.0	
			250	95-50250	20.00	50.0		45.0		40.0	
			300	95-50300	16.66	60.0		54.0		48.0	
60	30	14.8 x 10.5	60	95-6060	120.00	12.0		10.8		9.6	
			70	95-6070	102.86	14.0		12.6		11.2	
			80	95-6080	90.00	16.0		14.4		12.8	
			90	95-6090	80.00	18.0		16.2		14.4	
			100	95-60100	72.00	20.0		18.0		16.0	
			125	95-60125	57.60	25.0		22.5		20.0	
			150	95-60150	48.00	30.0		27.0		24.0	
			175	95-60175	41.14	35.0		31.5		28.0	
			200	95-60200	36.00	40.0		36.0		32.0	
			250	95-60250	28.80	50.0		45.0		40.0	
			300	95-60300	24.00	60.0		54.0		48.0	

* 1 daN = 1.0197 Kg (Force)



Die Spring Basics

Terminology and Concepts

A die spring is a highly engineered mechanical spring with specific wire designs that stores energy elastically by resisting movement when pressure is applied. The desired wire segment is selected to produce the maximum amount of force within a minimal amount of space.

Altering Die Springs

Each die spring is carefully engineered to perform within specific applications. Under no circumstances should you alter a die spring. Altering a die spring will change its designed characteristics and allows additional stresses to occur causing early failure. Grinding on the die spring not only changes the spring's original properties, but the heat from grinding can change the temper of the material and negatively affect the spring's performance.

Compressed Length

The sum of the preload travel and operating travel.

Corrosion

Frequently, die spring failure can be traced to corrosive elements which affect the surface of the spring's material, causing premature failure. Be aware of conditions that may affect the spring's surface such as rust, lubricants, soaps, and chemicals. Clean, protected die springs provide the best performance.

Cycle Rate

The more rapidly a spring is cycled, the greater the need to operate in the recommended long life deflections from the catalog.

Die Spring Guidance

Make sure that the hole size and/or rod size match the die spring's operating dimensions.

Duty Ranges

We offer various duty ranges to best suit your applications. Do not mix springs of different duties.

Free Length

The length of the spring without any load or force applied.

Hole Diameter

Die springs are designed to be used in a hole dimension as indicated in the catalog. The actual O.D. will be somewhat smaller to prevent interference.

Material

In our case, the spring material is High Tensile Strength Chrome Silicon Material. We use an optimal rectangular wire design. The maximum rated service temperature is 425°F.

Operating Travel

Operating travel is the deflection of the spring where it is operating between the preload and the total travel of the spring during operation. This is the area where the actual work is performed.

Preload

The initial force which is applied to a die spring. Preload is recommended to compress the first coils at each end where additional stresses are present because of the turn-down of the end coils. Applying a preload will extend the life of the spring.

Quality

Our die springs are manufactured in an ISO 9001:2015 facility.

Rates

Die spring rates are normally listed as Pounds per Inch of deflection (i.e. 60 pounds load per inch.) As a die spring is deflected, the loads will increase for the amount of travel it is deflected. That is, a spring with a 60lb/inch rate will produce 60 lbs of resistance at 1" of travel, 120 lbs. at 2" of travel, etc. For purposes of simplification, the loads in our catalog are shown in pounds needed to deflect a spring 1/10th of an inch. Simply multiply the rates given by 10 to determine the actual spring rate.

Rod Diameter

Die springs are designed to fit over a rod for guidance and the actual I.D. of the spring is actually somewhat larger to fit over a rod without interference.

Solid Height

Solid height is the height of the spring when all of the coils are totally collapsed to solid. You never want to operate a die spring close to this condition.

Industry Standard Die Springs

- Inch sizes manufactured to industry standard colors
- Yields reliable, trouble-free performance
- Manufactured in an ISO 9001:2015 certified facility
- Manufactured from premium spring quality high-tensile strength steel in accordance with ASTM A1000-99 specifications
- Optimal rectangular wire design



MEDIUM DUTY
Blue Stripe



MEDIUM HEAVY DUTY
Red Stripe



HEAVY DUTY
Gold Stripe



EXTRA HEAVY DUTY
Green Stripe

DieMax XL® Heavy Duty Springs – R-Series Inch

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	Wire Size (in)	CATALOG NUMBER	RATE Pounds Req'd. to deflect 1/10 in.	Total deflection for Long Life (15% of C)		Total Deflection for Avg. Life (20% of C)		Maximum Operating Deflection (28% of C)		* Max. Comp. Length (in)
						Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	
3/8	3/16	1.00	0.053 x 0.071	H100L	11.6	17.4	0.15	23.2	0.20	32.5	0.28	0.65
		1.25		H100AL	9.8	18.4	0.19	24.5	0.25	34.3	0.35	0.79
		1.50		H101L	8.0	18.0	0.23	24.0	0.30	33.6	0.42	0.87
		1.75		H101AL	7.5	19.7	0.26	26.3	0.35	36.8	0.49	0.99
		2.00		H102L	6.2	18.6	0.30	24.8	0.40	34.7	0.56	1.14
		2.50		H103L	5.0	18.8	0.38	25.0	0.50	35.0	0.70	1.41
		3.00		H104L	4.1	18.5	0.45	24.6	0.60	34.4	0.84	1.72
		12.00		H105L	1.1	20.5	1.80	27.4	2.40	38.3	3.36	6.74
1/2	9/32	1.00	0.071 x 0.095	H110L	22.5	33.8	0.15	45.0	0.20	63.0	0.28	0.67
		1.25		H110AL	18.2	34.1	0.19	45.5	0.25	63.7	0.35	0.70
		1.50		H111L	14.8	33.3	0.23	44.4	0.30	62.2	0.42	0.81
		1.75		H111AL	12.6	33.1	0.26	44.1	0.35	61.7	0.49	1.00
		2.00		H112L	11.0	33.0	0.30	44.0	0.40	61.6	0.56	1.05
		2.50		H113L	8.6	32.3	0.38	43.0	0.50	60.2	0.70	1.32
		3.00		H114L	7.4	33.3	0.45	44.4	0.60	62.2	0.84	1.54
		3.50		H115L	6.0	31.5	0.53	42.0	0.70	58.8	0.98	1.82
12.00	H117L	1.7	30.6	1.80	40.8	2.40	57.1	3.36	6.28			
5/8	11/32	1.00	0.096 x 0.115	H120L	42.4	63.6	0.15	84.8	0.20	118.7	0.28	0.63
		1.25		H120AL	32.5	60.9	0.19	81.3	0.25	113.8	0.35	0.80
		1.50		H121L	28.0	63.0	0.23	84.0	0.30	117.6	0.42	0.90
		1.75		H121AL	24.0	63.0	0.26	84.0	0.35	117.6	0.49	1.03
		2.00		H122L	20.8	62.4	0.30	83.2	0.40	116.5	0.56	1.18
		2.50		H123L	17.0	63.8	0.38	85.0	0.50	119.0	0.70	1.44
		3.00		H124L	14.0	63.0	0.45	84.0	0.60	117.6	0.84	1.70
		3.50		H125L	12.2	64.1	0.53	85.4	0.70	119.6	0.98	1.97
4.00	H126L	10.8	64.8	0.60	86.4	0.80	121.0	1.12	2.28			
12.00	H127L	3.0	54.0	1.80	72.0	2.40	100.8	3.36	6.95			
3/4	3/8	1.00	0.130 x 0.155	H1L	108.0	162.0	0.15	216.0	0.20	302.4	0.28	0.70
		1.25		H1AL	88.0	165.0	0.19	220.0	0.25	308.0	0.35	0.86
		1.50		H2L	69.0	155.3	0.23	207.0	0.30	289.8	0.42	1.02
		1.75		H2AL	60.0	157.5	0.26	210.0	0.35	294.0	0.49	1.19
		2.00		H3L	51.5	154.5	0.30	206.0	0.40	288.4	0.56	1.35
		2.50		H4L	40.0	150.0	0.38	200.0	0.50	280.0	0.70	1.71
		3.00		H5L	33.0	148.5	0.45	198.0	0.60	277.2	0.84	2.00
		3.50		H6L	29.0	152.3	0.53	203.0	0.70	284.2	0.98	2.33
		4.00		H7L	25.0	150.0	0.60	200.0	0.80	280.0	1.12	2.67
		4.50		H8L	22.0	148.5	0.68	198.0	0.90	277.2	1.26	3.00
		5.00		H9L	19.5	146.3	0.75	195.0	1.00	273.0	1.40	3.33
		5.50		H10L	17.8	146.9	0.83	195.8	1.10	274.1	1.54	3.75
		6.00		H11L	16.0	144.0	0.90	192.0	1.20	268.8	1.68	3.99
		12.00		H11AL	8.0	144.0	1.80	192.0	2.40	268.8	3.36	7.90

* For design purposes only. We do not recommend deflecting a spring to maximum deflection.



Product Features:

- ◆ Color – Gold
- ◆ High tensile strength chrome silicon
- ◆ Optimal rectangular wire design
- ◆ Long life design

Hole Diam. (in) A	Rod Diam. (in) B	Free Length (in) C	Wire Size (in)	CATALOG NUMBER	RATE Pounds Req'd. to deflect 1/10 in.	Total deflection for Long Life (15% of C)		Total Deflection for Avg. Life (20% of C)		Maximum Operating Deflection (28% of C)		* Max. Comp. Length (in)
						Load lbs.	Defl. in.	Load lbs.	Defl. in.	Load lbs.	Defl. in.	
1	1/2	1.00	0.165 x 0.216	H12L	193.2	289.8	0.15	386.4	0.20	541.0	0.28	0.68
		1.25		H12AL	146.5	274.7	0.19	366.3	0.25	512.8	0.35	0.86
		1.50		H13L	120.0	270.0	0.23	360.0	0.30	504.0	0.42	1.03
		1.75		H13AL	104.0	273.0	0.26	364.0	0.35	509.6	0.49	1.18
		2.00		H14L	87.2	261.6	0.30	348.8	0.40	488.3	0.56	1.35
		2.50		H15L	66.5	249.4	0.38	332.5	0.50	465.5	0.70	1.68
		3.00		H16L	54.4	244.8	0.45	326.4	0.60	457.0	0.84	2.00
		3.50		H17L	45.6	239.4	0.53	319.2	0.70	446.9	0.98	2.33
		4.00		H18L	40.0	240.0	0.60	320.0	0.80	448.0	1.12	2.63
		4.50		H19L	35.2	237.6	0.68	316.8	0.90	443.5	1.26	2.94
		5.00		H20L	31.2	234.0	0.75	312.0	1.00	436.8	1.40	3.26
		5.50		H20AL	28.8	237.6	0.83	316.8	1.10	443.5	1.54	3.55
		6.00		H21L	25.6	230.4	0.90	307.2	1.20	430.1	1.68	3.87
		7.00		H21AL	22.4	235.2	1.05	313.6	1.40	439.0	1.96	4.47
		8.00		H22L	19.2	230.4	1.20	307.2	1.60	430.1	2.24	5.16
		12.00		H22AL	12.8	230.4	1.80	307.2	2.40	430.1	3.36	7.80
1 1/4	5/8	1.50	0.209 x 0.275	H36L	220.0	495.0	0.23	660.0	0.30	924.0	0.42	1.01
		1.75		H36AL	181.6	476.7	0.26	635.6	0.35	889.8	0.49	1.17
		2.00		H37L	149.6	448.8	0.30	598.4	0.40	837.8	0.56	1.34
		2.50		H38L	117.6	441.0	0.38	588.0	0.50	823.2	0.70	1.68
		3.00		H39L	95.2	428.4	0.45	571.2	0.60	799.7	0.84	2.02
		3.50		H40L	78.0	409.5	0.53	546.0	0.70	764.4	0.98	2.30
		4.00		H41L	66.4	398.4	0.60	531.2	0.80	743.7	1.12	2.66
		4.50		H42L	58.4	394.2	0.68	525.6	0.90	735.8	1.26	2.99
		5.00		H43L	53.0	397.5	0.75	530.0	1.00	742.0	1.40	3.30
		5.50		H44L	47.2	389.4	0.83	519.2	1.10	726.9	1.54	3.62
		6.00		H45L	45.0	405.0	0.90	540.0	1.20	756.0	1.68	3.95
		7.00		H46L	36.8	386.4	1.05	515.2	1.40	721.3	1.96	4.60
		8.00		H47L	32.8	393.6	1.20	524.8	1.60	734.7	2.24	5.25
		10.00		H48L	25.6	384.0	1.50	512.0	2.00	716.8	2.80	6.40
12.00	H48AL	22.0	396.0	1.80	528.0	2.40	739.2	3.36	7.62			
1 1/2	3/4	2.00	0.245 x 0.328	H49L	198.0	594.0	0.30	792.0	0.40	1108.8	0.56	1.34
		2.50		H50L	155.0	581.3	0.38	775.0	0.50	1085.0	0.70	1.68
		3.00		H51L	130.0	585.0	0.45	780.0	0.60	1092.0	0.84	1.99
		3.50		H52L	106.4	558.6	0.53	744.8	0.70	1042.7	0.98	2.30
		4.00		H53L	91.2	547.2	0.60	729.6	0.80	1021.4	1.12	2.62
		4.50		H54L	81.6	550.8	0.68	734.4	0.90	1028.2	1.26	2.91
		5.00		H55L	73.0	547.5	0.75	730.0	1.00	1022.0	1.40	3.22
		5.50		H55AL	67.0	552.8	0.83	737.0	1.10	1031.8	1.54	3.54
		6.00		H56L	58.4	525.6	0.90	700.8	1.20	981.1	1.68	3.82
		7.00		H56AL	49.6	520.8	1.05	694.4	1.40	972.2	1.96	4.44
		8.00		H57L	43.2	518.4	1.20	691.2	1.60	967.7	2.24	5.02
		10.00		H58L	36.2	543.0	1.50	724.0	2.00	1013.6	2.80	6.26
12.00	H58AL	30.0	540.0	1.80	720.0	2.40	1008.0	3.36	7.50			
2	1	2.50	0.305 x 0.450	H70L	251.2	942.0	0.38	1256.0	0.50	1758.4	0.70	1.71
		3.00		H71L	206.0	927.0	0.45	1236.0	0.60	1730.4	0.84	2.05
		3.50		H72L	170.0	892.5	0.53	1190.0	0.70	1666.0	0.98	2.37
		4.00		H73L	150.0	900.0	0.60	1200.0	0.80	1680.0	1.12	2.67
		4.50		H74L	127.2	858.6	0.68	1144.8	0.90	1602.7	1.26	2.98
		5.00		H75L	118.6	889.5	0.75	1186.0	1.00	1660.4	1.40	3.32
		5.50		H76L	107.7	888.5	0.83	1184.7	1.10	1658.6	1.54	3.65
		6.00		H77L	97.7	879.3	0.90	1172.4	1.20	1641.4	1.68	3.97
		7.00		H79L	82.0	861.0	1.05	1148.0	1.40	1607.2	1.96	4.61
		8.00		H80L	73.0	876.0	1.20	1168.0	1.60	1635.2	2.24	5.22
		10.00		H82L	57.2	858.0	1.50	1144.0	2.00	1601.6	2.80	6.55
		12.00		H83L	47.7	858.6	1.80	1144.8	2.40	1602.7	3.36	7.75


Note: All springs are available unpainted by adding the suffix "NP" to the end of the part number.

Spring Cages




- ◆ These spring cages enhance die spring life by providing a flat, hardened die pocket for spring operation.
- ◆ Cages are available for metric and inch spring diameters from 3/4" – 2 (20mm – 50mm).
- ◆ Accommodate standard metric and inch guiding rods and drill diameters.
- ◆ Material: 0.049" / 1.245mm cold rolled steel.
- ◆ Conforms to NAAMS standards.

Spring Diameter		Drill Diameter		Cage O.D.		Clearance for Rod (H)	
(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
3/4	20	29/32	24	0.86	21.7	7/16	11
1	25	1-5/32	30	1.11	28.1	9/16	14
1-1/4	32	1-13/32	36	1.36	34.4	3/4	19
1-1/2	40	1-21/32	43	1.61	40.8	31/32	25
2	50	2-5/32	56	2.11	53.5	1-3/8	35

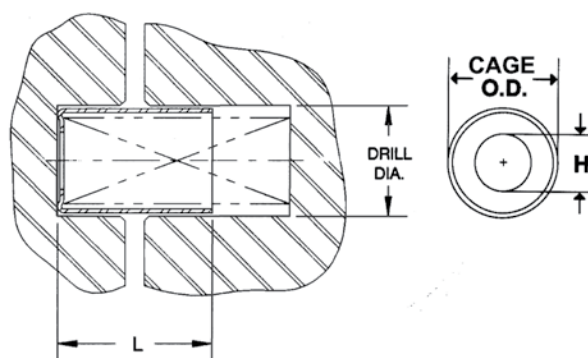

Length L		3/4 in. & 20mm Diameter Springs			1 in. & 25mm Diameter Springs			1-1/4 in. & 32mm Diameter Springs			1-1/2 in. & 40mm Diameter Springs			2 in. & 50mm Diameter Springs		
(in)	(mm)	Danly Part No.	NAAMS Code	Lamina Part No.	Danly Part No.	NAAMS Code	Lamina Part No.	Danly Part No.	NAAMS Code	Lamina Part No.	Danly Part No.	NAAMS Code	Lamina Part No.	Danly Part No.	NAAMS Code	Lamina Part No.
1	25	6-8	S212025	LSC0608	8-8	S212525	LSC0808	10-8	S213225	LSC1008	12-8	S214025	LSC1208	16-8	S215025	LSC1608
1-1/4	32	6-10	S212032	LSC0610	8-10	S212532	LSC0810	10-10	S213232	LSC1010	12-10	S214032	LSC1210	16-10	S215032	LSC1610
1-1/2	38	6-12	S212038	LSC0612	8-12	S212538	LSC0812	10-12	S213238	LSC1012	12-12	S214038	LSC1212	16-12	S215038	LSC1612
1-3/4	44	6-14	S212044	LSC0614	8-14	S212544	LSC0814	10-14	S213244	LSC1014	12-14	S214044	LSC1214	16-14	S215044	LSC1614
2	51	6-16	S212051	LSC0616	8-16	S212551	LSC0816	10-16	S213251	LSC1016	12-16	S214051	LSC1216	16-16	S215051	LSC1616
2-1/4	57	6-18	—	LSC0618	8-18	—	LSC0818	10-18	—	LSC1018	12-18	—	LSC1218	16-18	—	LSC1618
2-1/2	64	6-20	S212064	LSC0620	8-20	S212564	LSC0820	10-20	S213264	LSC1020	12-20	S214064	LSC1220	16-20	S215064	LSC1620
2-3/4	70	6-22	—	LSC0622	8-22	—	LSC0822	10-22	—	LSC1022	12-22	—	LSC1222	16-22	—	LSC1622
3	76	6-24	S212076	LSC0624	8-24	S212576	LSC0824	10-24	S213276	LSC1024	12-24	S214076	LSC1224	16-24	S215076	LSC1624
3-1/4	83	6-26	—	LSC0626	8-26	—	LSC0826	10-26	—	LSC1026	12-26	—	LSC1226	16-26	—	LSC1626
3-1/2	89	6-28	S212089	LSC0628	8-28	S212589	LSC0828	10-28	S213289	LSC1028	12-28	S214089	LSC1228	16-28	S215089	LSC1628
3-3/4	95	6-30	—	LSC0630	8-30	—	LSC0830	10-30	—	LSC1030	12-30	—	LSC1230	16-30	—	LSC1630
4	102	6-32	S212010	LSC0632	8-32	S212510	LSC0832	10-32	S213210	LSC1032	12-32	S214010	LSC1232	16-32	S215010	LSC1632
4-1/4	108	6-34	—	LSC0634	8-34	—	LSC0834	10-34	—	LSC1034	12-34	—	LSC1234	16-34	—	LSC1634
4-1/2	114	6-36	—	LSC0636	8-36	—	LSC0836	10-36	—	LSC1036	12-36	—	LSC1236	16-36	—	LSC1636
4-3/4	121	6-38	—	LSC0638	8-38	—	LSC0838	10-38	—	LSC1038	12-38	—	LSC1238	16-38	—	LSC1638
5	127	6-40	S212012	LSC0640	8-40	S212512	LSC0840	10-40	S213212	LSC1040	12-40	S214012	LSC1240	16-40	S215012	LSC1640
5-1/2	140	6-44	—	LSC0644	8-44	—	LSC0844	10-44	—	LSC1044	12-44	—	LSC1244	16-44	—	LSC1644
6	152	6-48	S212015	LSC0648	8-48	S212515	LSC0848	10-48	S213215	LSC1048	12-48	S214015	LSC1248	16-48	S215015	LSC1648
6-1/2	165	6-52	—	LSC0652	8-52	—	LSC0852	10-52	—	LSC1052	12-52	—	LSC1252	16-52	—	LSC1652
7	178	6-56	S212017	LSC0656	8-56	S212517	LSC0856	10-56	S213217	LSC1056	12-56	S214017	LSC1256	16-56	S215017	LSC1656
8	203	6-64	S212020	LSC0664	8-64	S212520	LSC0864	10-64	S213220	LSC1064	12-64	S214020	LSC1264	16-64	S215020	LSC1664
9	229	—	—	—	—	—	—	10-72	S213222	LSC1072	12-72	S214022	LSC1272	16-72	S215022	LSC1672
10	254	—	—	—	—	—	—	10-80	—	LSC1080	12-80	—	LSC1280	16-80	—	LSC1680
11	280	—	—	—	—	—	—	—	—	—	—	—	—	16-88	S215028	LSC1688
12	305	—	—	—	—	—	—	—	—	—	—	—	—	16-96	S215030	LSC1696

- ◆ These spring retainers hold individual springs firmly in position while the die is being assembled or disassembled. Pre-loading the spring is easy since the springs can be set individually, which avoids working against the combined force of the springs.
- ◆ Available for springs 1-1/4" (32mm), 1-1/2" (38mm) and 2" (50mm) diameters and any free length where clearance permits.
- ◆ Material: Steel

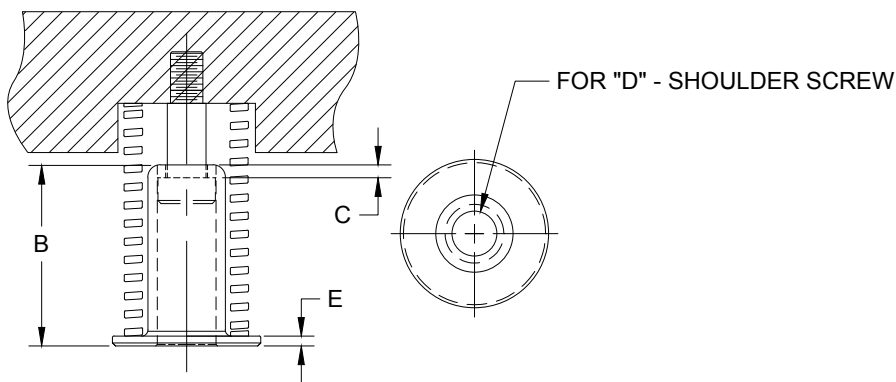


CATALOG NUMBER	Spring Diameter		Rod Diameter A		B		C		Shoulder Screw D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
SR125150	1-1/4	32	5/8	16	1-11/16	43	0.19	4.8	5/16	-	0.19	4.8
SR125200					2-3/16	56	0.19	4.8	5/16	-	0.19	4.8
SR125250					2-11/16	68	0.19	4.8	5/16	-	0.19	4.8
SR150150	1-1/2	38	3/4	19	1-11/16	43	0.19	4.8	3/8	M8	0.19	4.8
9-0615-16					1-7/8	48	0.125	3.2	3/8	M8	0.096	2.4
SR150200					2-3/16	56	0.19	4.8	3/8	M8	0.19	4.8
SR150250					2-11/16	68	0.19	4.8	3/8	M8	0.19	4.8
SR200150	2	50	1	25	1-11/16	43	0.19	4.8	1/2	M13	0.19	4.8
9-0815-16					1-7/8	48	0.125	3.2	1/2	M13	0.125	3.2
SR200200					2-3/16	56	0.19	4.8	1/2	M13	0.19	4.8
SR200250					2-11/16	68	0.19	4.8	1/2	M13	0.19	4.8
9-0823-16					2-7/8	73	0.125	3.2	1/2	M13	0.125	3.2

Spring Guards



- ◆ Spring guards hold individual springs firmly in position
- ◆ Available for springs 1-1/4" (32mm), 1-1/2" (38mm) and 2" (50mm) diameters and any free length where clearance permits
- ◆ Material: 0.049" / 1.24mm cold rolled steel with painted finish

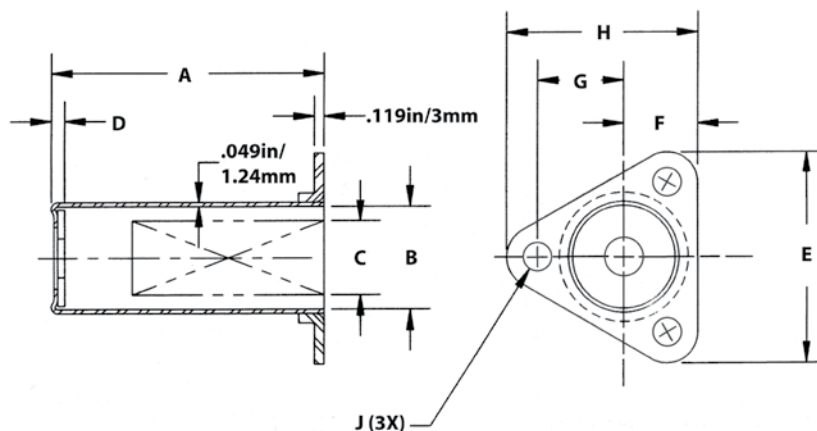

CATALOG NUMBER	A		Max Spring Dia B		Recommended Spring Dia C		D		E		F		G		H		J	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
10-24G	3	76	1-1/4	32	1	25	3/16	5	2-19/32	66	29/32	23	1-1/16	27	2-11/32	60	11/32	9
10-32G	4	102																
10-40G	5	127																
10-48G	6	152																
10-56G	7	178																
12-24G	3	76	1-1/2	38	1-1/4	32	3/16	5	2-15/16	75	1	25	1-1/4	32	2-5/8	67	11/32	9
12-32G	4	102																
12-40G	5	127																
12-48G	6	152																
12-56G	7	178																
12-64G	8	203	2	51	1-1/2	38	1/4	6	3-3/4	96	1 1/4	32	1-5/8	41	3-7/16	88	7/16	11
12-80G	10	254																
16-32G	4	102																
16-40G	5	127																
16-48G	6	152																
16-56G	7	178	2	51	1-1/2	38	1/4	6	3-3/4	96	1 1/4	32	1-5/8	41	3-7/16	88	7/16	11
16-64G	8	203																
16-68G	9	229																
16-80G	10	254																
16-96G	12	305																

Compression Spring Special Requirement Quote Sheet

Company Information

Company: _____

Contact: _____ Title: _____

Address: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: _____ Fax: _____

Sales Requirements

Estimated Annual Volume: _____ Order Quantity: _____

Delivery Date Required: _____

Compression Spring Specifications

Spring Material: _____ Wire Size: _____

Outside Diameter: _____ Inside Diameter: _____

Free Length: _____ Maximum Solid Height: _____

Ends (Closed & Ground or Closed & Unground: _____

Specify One of the Next Three Attributes

Total Coils: _____ Spring Rate: _____

Load at a Given Rate: _____

Application Explanation

Finish (Painted, Unpainted, Plating)

Critical Tolerances, Certifications or Inspections Required

Commitment to Quality & Customer Satisfaction

Dayton Lamina is a leading manufacturer of tool, die and mold components for the metal-working and plastics industries. As a customer-focused, world-class supplier of choice, we provide the brands, product breadth, distribution network and technical support for all your metal forming needs.

Our goal is to give our customers the most innovative and value-added products and services.



DAYTON Lamina™

a MISUMI Group Company



Lamina® LEMPCO

*Dayton Lamina's line of Danly products is available only to North America.

www.daytonlamina.com